GLOBAL RX (TOP)

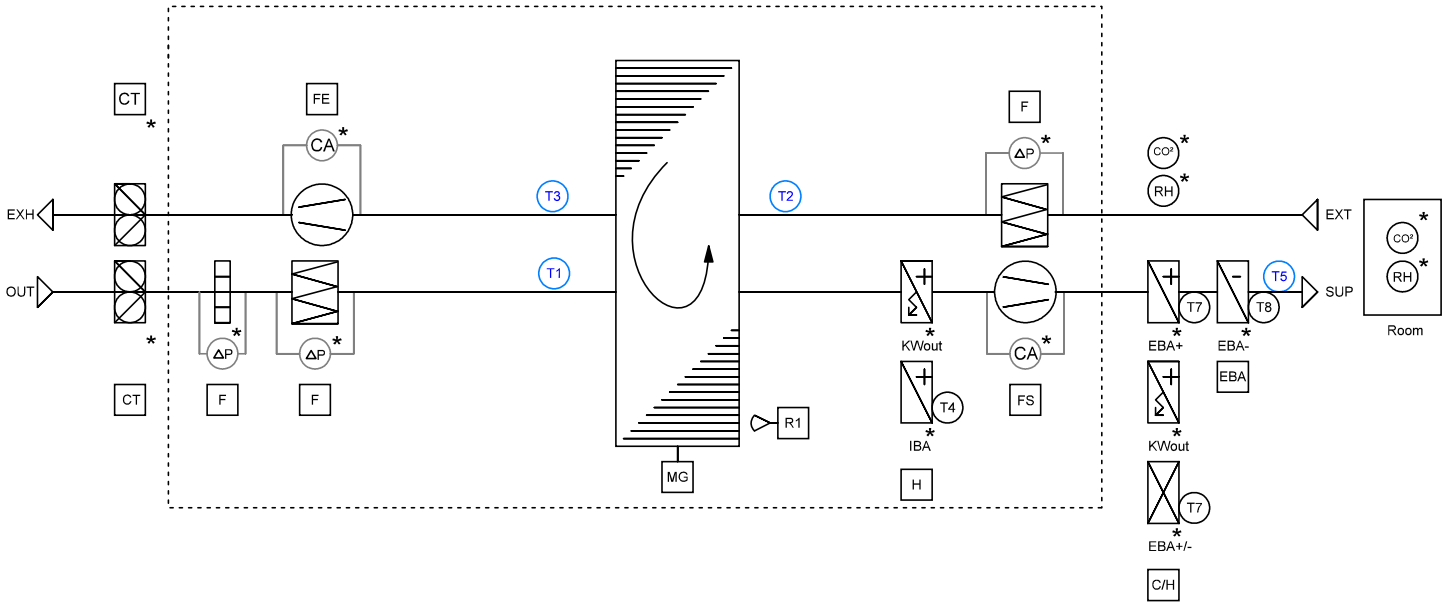

Component

				Delivery
FE	Exhaust fan with EC drive			installed / wired / configured
FS	Supply fan with EC drive			installed / wired / configured
CT*	Motorised damper CT			installed / wired / configured
H*	Heating			
	KWout* : Electrical post-heating coil			installed / wired / configured
	IBA* : Internal Water Heating coil			installed / wired / configured
	3-way valve, Valve actuator			installed / wired / configured
F	Filter OUT ePM1 50% (F7) / EXT ePM10 50% (M5)			separately
C/H*	Heating / Cooling			installed
	IBA+* : Heating coil			
	KW* : Electric heating			separately
	EBA+/- *: Change over coil			separately
C*	Cooling			separately
	EBA-* : Cooling coil			separately
T1	Outdoor temp.	T3	Exhaust temp.	installed / wired / configured
T2	Extract temp.	T5	Supply temp. (separately)	
T4	Frost protection temp.			installed / wired / configured
T7	Frost protection temp.			installed / wired / configured
T8	Frost protection temp.			separately
CO² * RH *	Sensors CO², Humidity			separately
CA*	Constant airflow kit			installed / wired / configured
ΔP*	Pressure switch			separately
Pa*	Pressure sensor			installed / wired / configured

*: Option

Changes			Name	Date	
Name	Date	Draw.:	Beckers	18.12.2018	
		check.:	Pary		
		Norm:			
Subject:	GLOBAL_Fow chart_EN.spl7				GLOBAL RX (TOP)