


A

B

C

D

GLOBAL LP

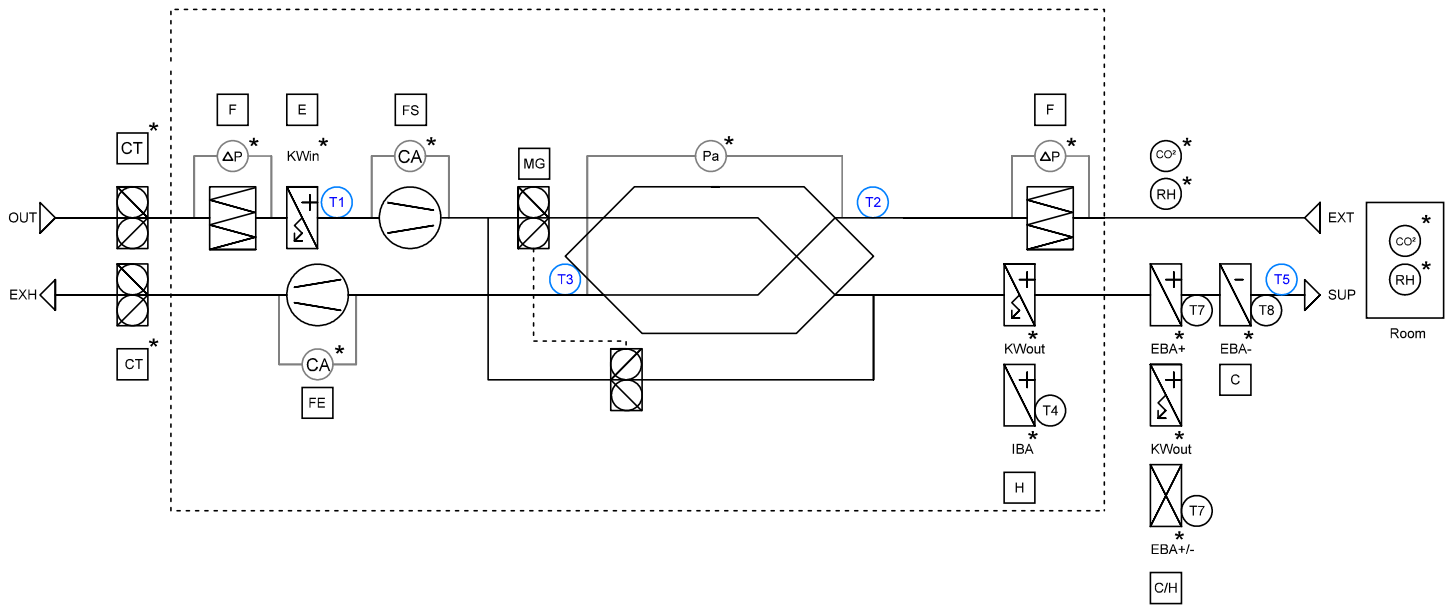

Component

	Exhaust fan with EC drive
	Supply fan with EC drive
	Motorised damper CT
	Heating

KWin* : Electrical coil "frost protection"

KWout* : Electrical post-heating coil

IBA* : Internal Water Heating coil

3-way valve, Valve actuator

	Filter OUT ePM1 50% (F7) / EXT ePM10 50% (M5)
--	--

	Heating / Cooling IBA+* : Heating coil KW* : Electric heating EBA+/- * : Change over coil
--	--

	Cooling EBA-* : Cooling coil
--	---------------------------------

	Outdoor temp.		Exhaust temp.
	Extract temp.		Supply temp. (separately)

Frost protection temp.

Frost protection temp.

Frost protection temp.

Sensors CO², Humidity

Constant airflow kit

Pressure switch

Pressure sensor

Delivery

installed / wired / configured

installed / wired / configured

separately

installed / wired / configured

installed / wired / configured

installed / wired / configured

separately

installed

separately

separately

separately

separately

installed / wired / configured

installed / wired / configured

installed / wired / configured

separately

separately

separately

installed / wired / configured

separately

installed / wired / configured

*: Option

Changes

Name

Date

Name	Date	Draw.:	Beckers	Date	10.10.2018
------	------	--------	---------	------	------------

check.:	Pary
---------	------

Norm.:	
--------	--

Subject:	GLOBAL_Fow chart_EN.sp17
----------	--------------------------

GLOBAL LP