

NS Transfer Grille

Installation - Maintenance

Health & Safety

Symbols in this user manual

Warning/Caution!



General

Please read this manual carefully in advance and make it accessible to all persons involved in a suitable and appropriate place. We point out that not observing the instructions in this document may affect the warranty.

It is not permissible to make changes or modify this product other than those specified in this document.

Personnel

Work should be carried out by a competent person.

PPE



Appropriate personal protective equipment should be used. All operatives should follow guidance for the specific building site. We recommend the following: Safety shoes or boots, work gloves, eye protection, helmet, high viz clothing, hearing protection, face mask.

Handling and Storage

No special precautions are required when handling air diffusers/grilles, but they should always be treated with care. The products do not fall within the scope of COSHH regulations.

Grilles/Diffusers should be stored in a dry ambient location and protected from dust & impact damage.

Maintenance

These are static units without moving parts therefore maintenance is confined to cleaning.

To remove significant amounts of lint etc from the unit a vacuum cleaner with a soft brush head may be used.


Powder coated surfaces should be washed with a warm water solution of mild detergent or suitable proprietary cleaning agent.

Abrasive cleaners or those containing ketones, esters, acids, alkali or alcohol should not be used.


Installation

NS



1. PLACE THE GRILLE INTO OPENING.
2. HOLD/FIX THE GRILLE IN POSITION WITH SUITABLE BEADING (SUPPLIED BY OTHERS).

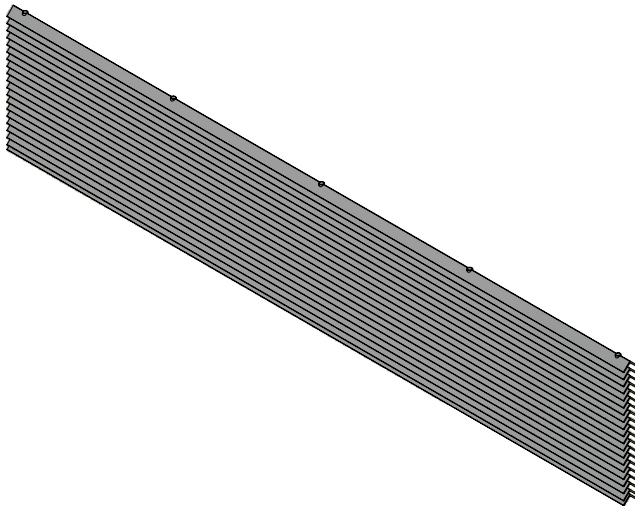

(NOTE 2)

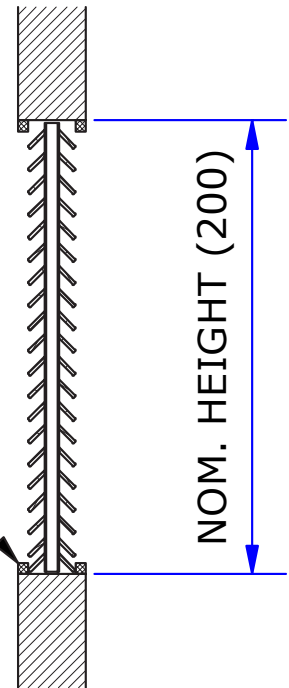



SECTION B-B

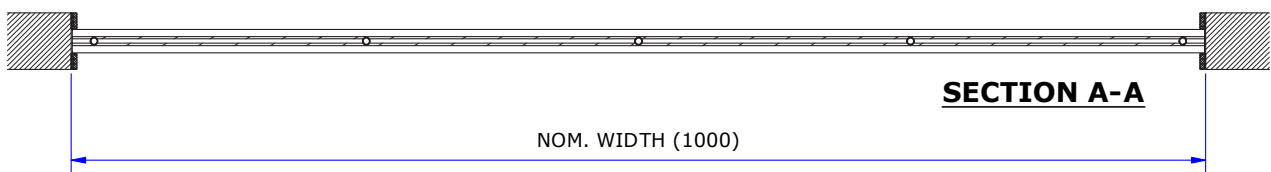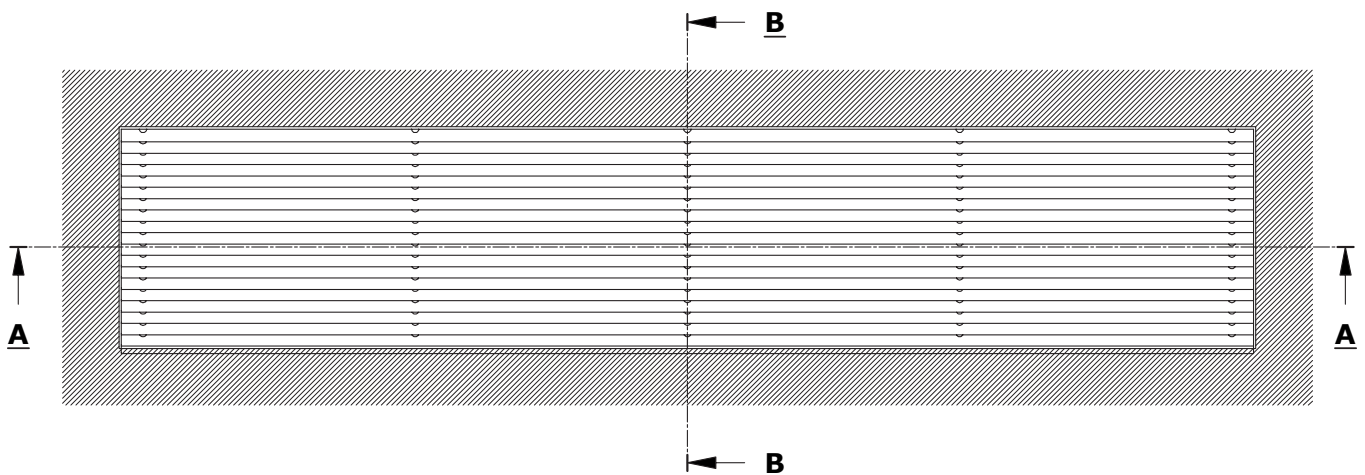



NSC

SF INSTALLATION

1. PLACE THE GRILLE AND MARK FIXING POINT POSITIONS.
2. REMOVE GRILLE AND DRILL HOLES IN STRUCTURE.
3. FIX GRILLE USING SUITABLE FIXING FOR WALL/DOOR CONSTRUCTION.
4. USE PROVIDED SCREWS: -NO.6x1" POZI INSTRUMENT STEEL SCREW(4501014)

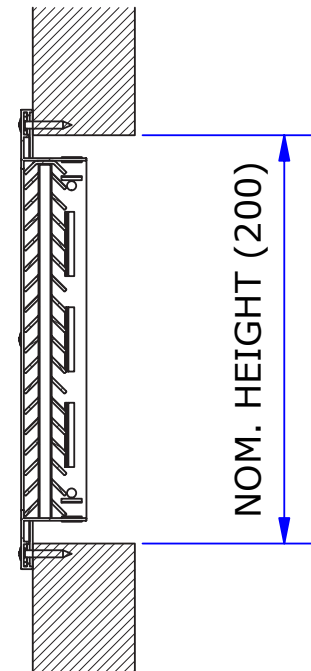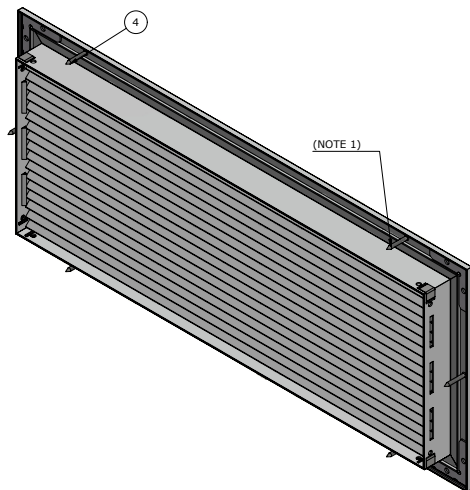

SECTION B-B

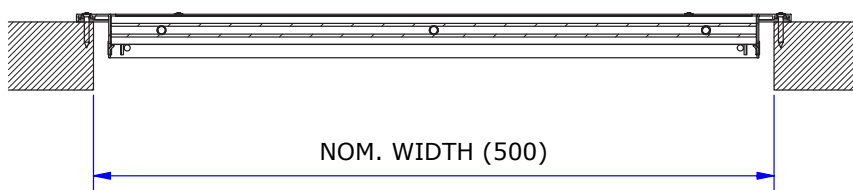
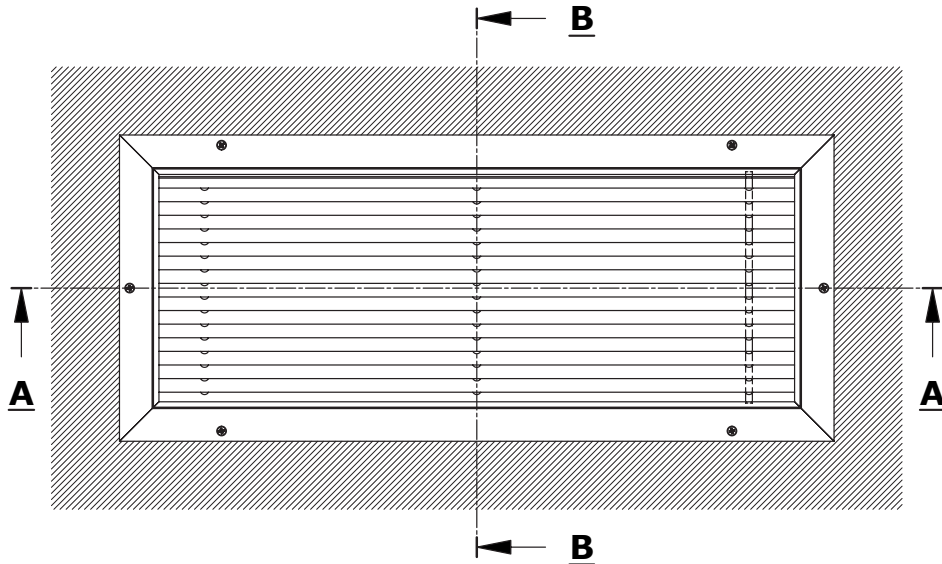


SECTION A-A



NSC

CF INSTALLATION

1. PLACE THE GRILLE IN POSITION AND PRESS IT INTO THE OPENING.
2. USE PROVIDED CLIPS: - GRILL CLIP FIX (006703)

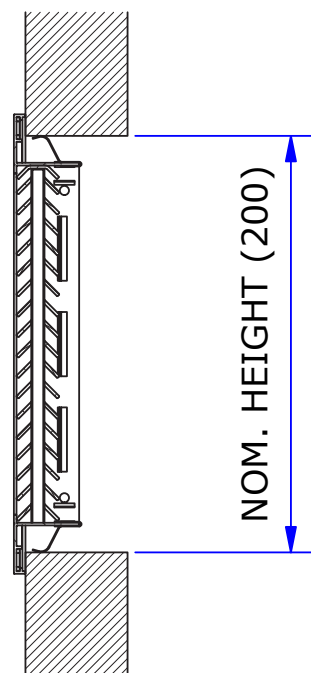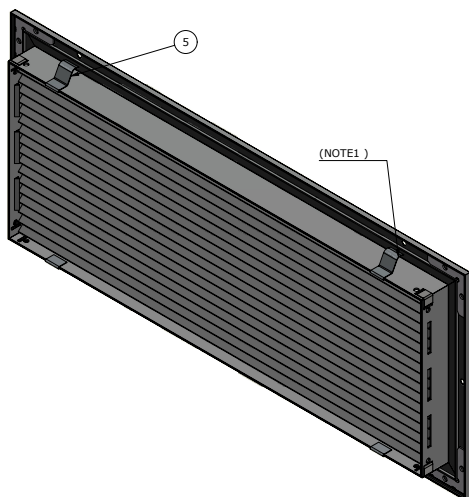



SECTION C-C

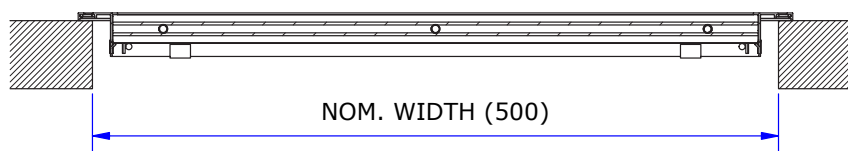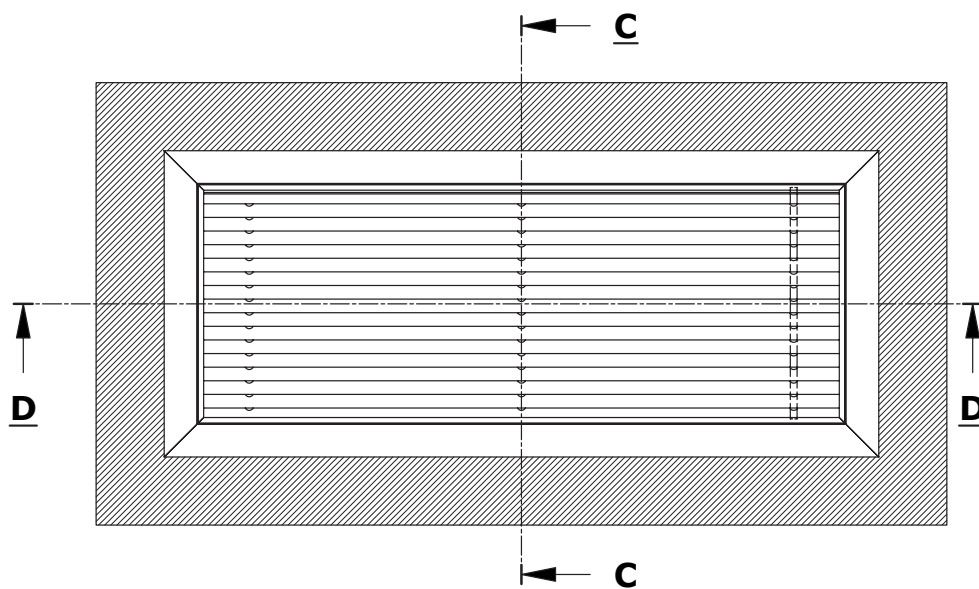



SECTION D-D

SF INSTALLATION

1. PLACE THE GRILLE AND MARK FIXING POINT POSITIONS.
2. REMOVE GRILLE AND DRILL HOLES IN STRUCTURE.
3. FIX GRILLE USING SUITABLE FIXING FOR WALL/DOOR CONSTRUCTION.
4. USE PROVIDED SCREWS: -NO.6x1" POZI INSTRUMENT STEEL SCREW(4501014)

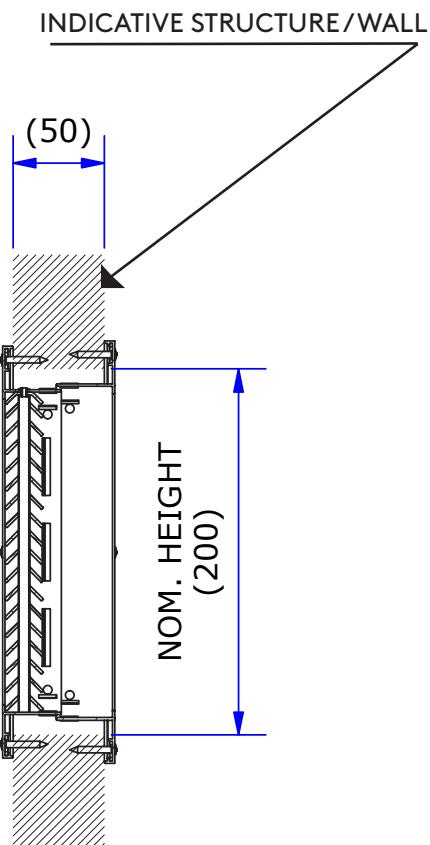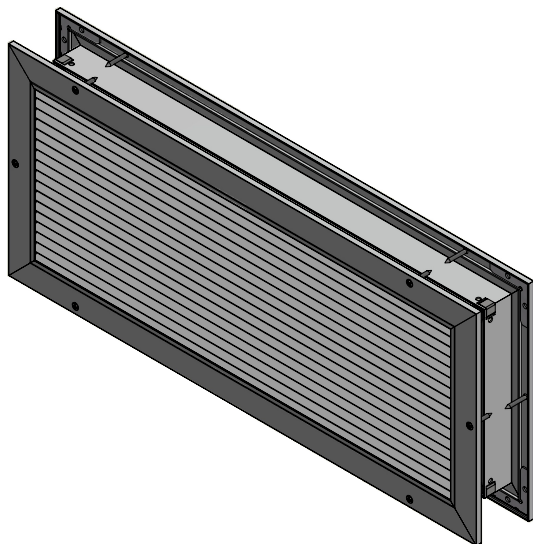

SECTION B-B

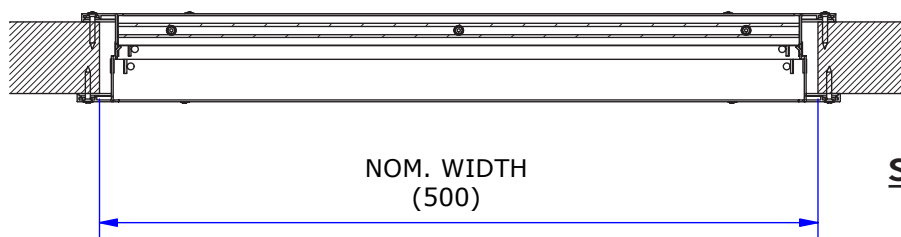
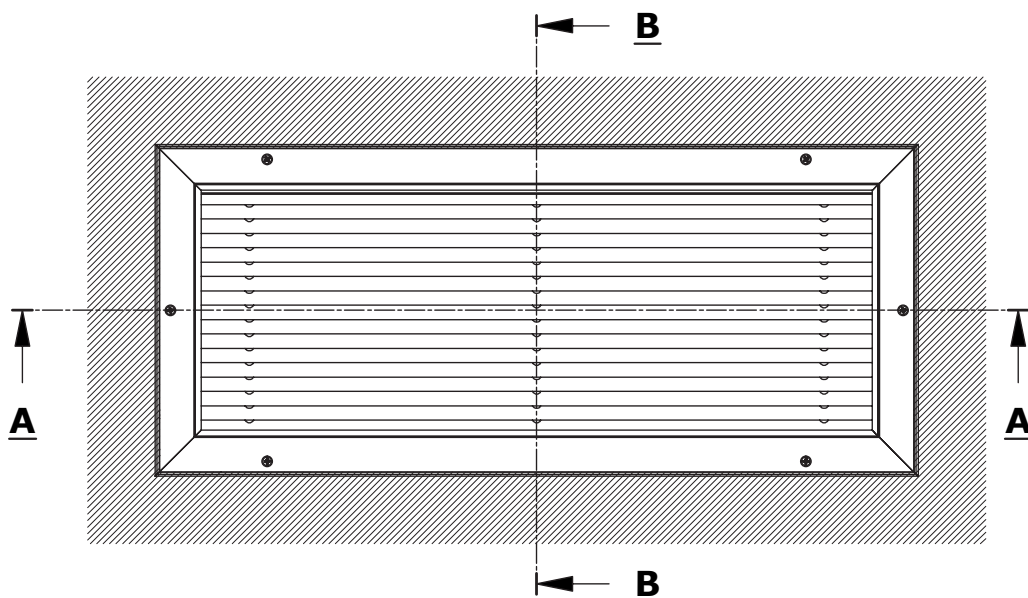


SECTION A-A


PSF INSTALLATION

1. PLACE BOTH FRAMES EITHER SIDE OF THE OPENING.
2. LARGE FRAME AT THE EXTERNAL SIDE OF THE OPENING & MARK HOLES
3. SMALL FRAME AT THE INTERNAL SIDE OF THE OPENING.
4. REMOVE GRILLES & DRILL 8mm FIXING HOLES
5. SECURE THE FRAMES TO EACH OTHER WITH PROVIDED CONNECTING SCREWS:

- CONNECTING SCREW M4 (006683)

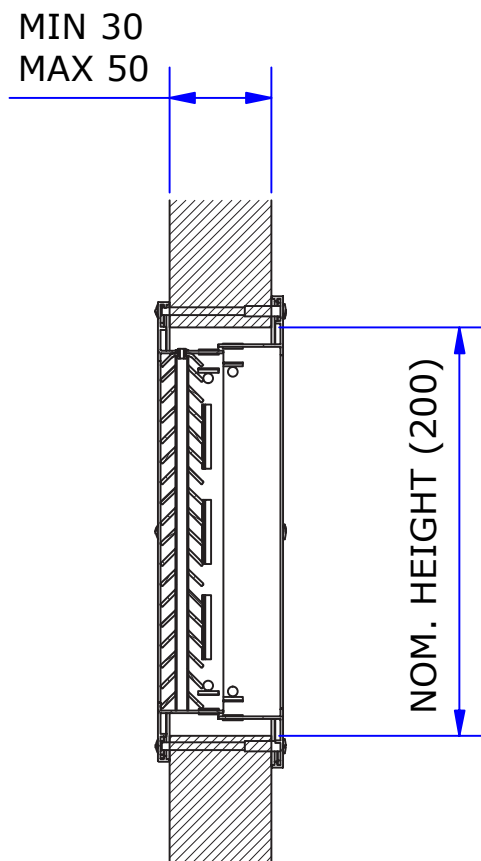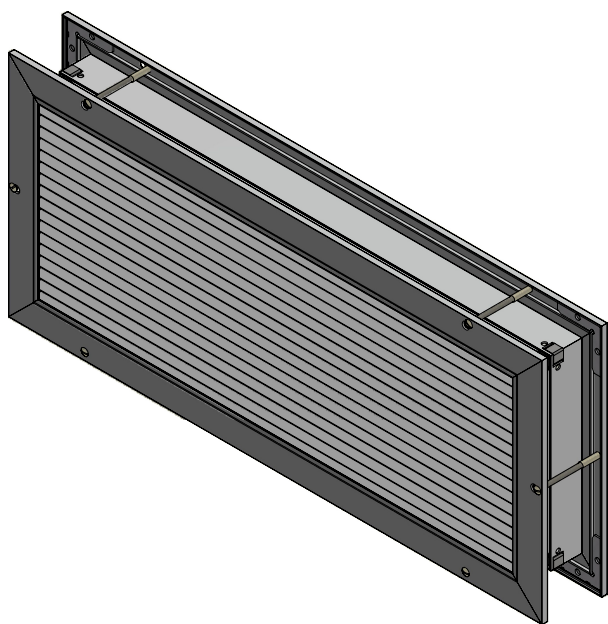

SECTION C-C

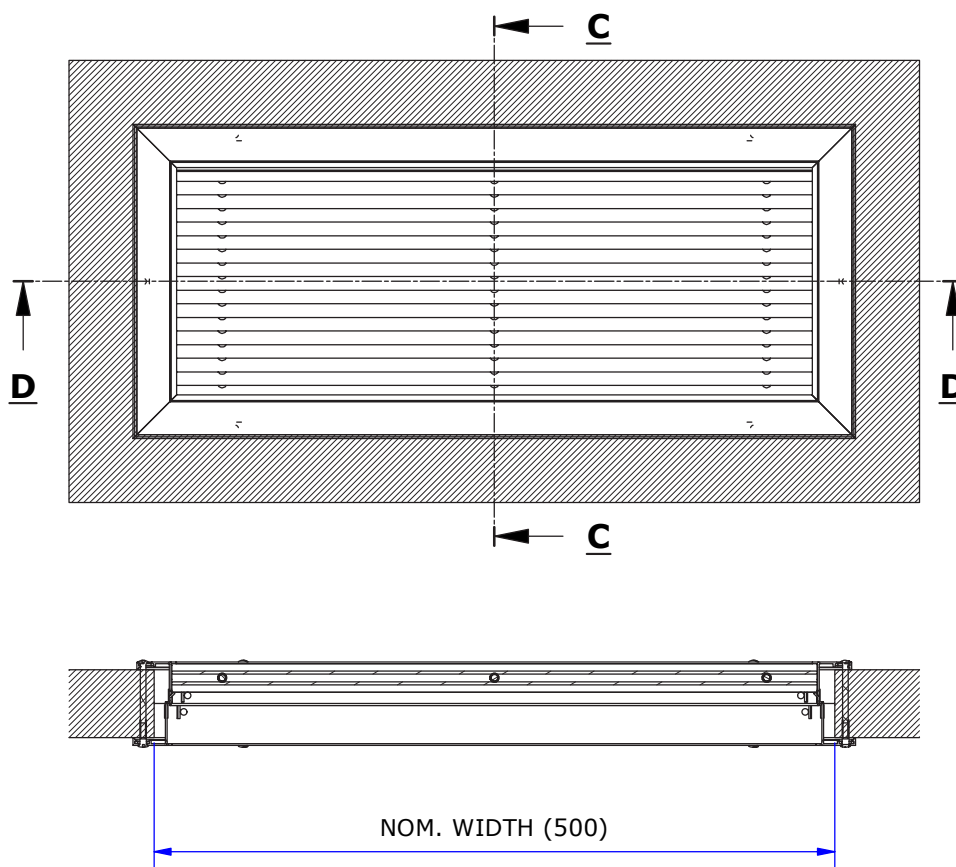

SECTION D-D