


# FRB C

Installation – Maintenance


8-5-2023


## Installation

FRBc

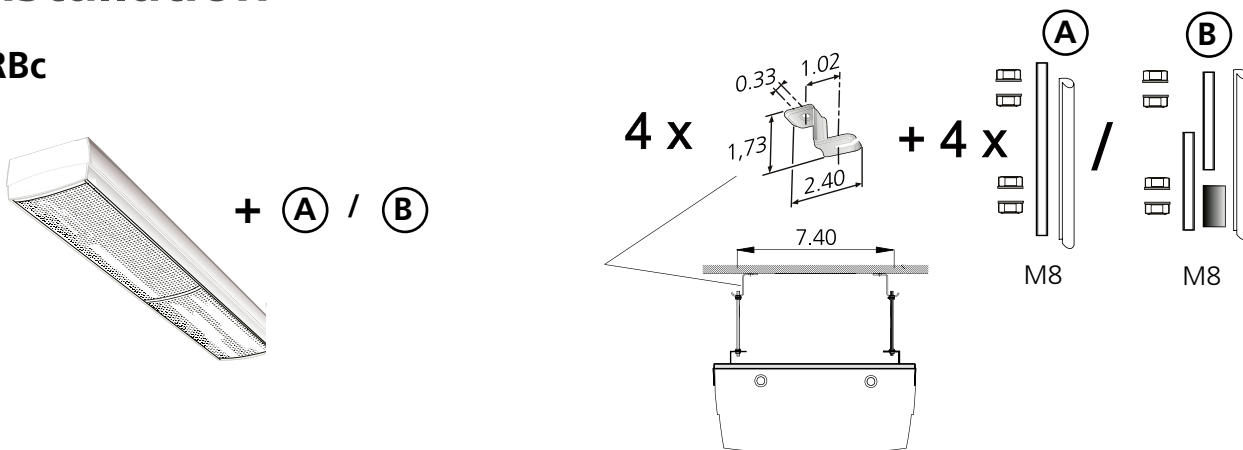

Max. recommended operating pressure: 230 psi

 Cu Ø12 x 1 mm


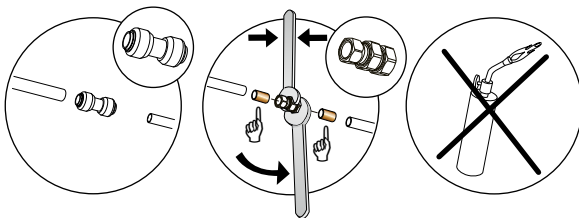



20-35 Nm

Note that clamp ring couplings require support sleeves inside the pipes.




Water quality in the system must be regularly monitored to prevent corrosion in the water circuit  
**For US and Canada market WARNING:**  
 The power feeding shall be a Low Voltage class 2 circuit.

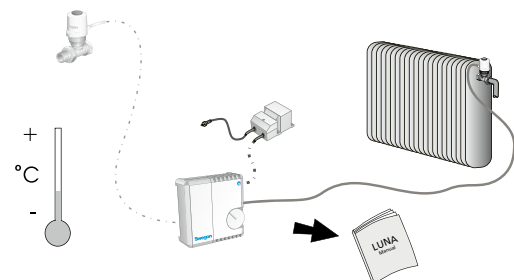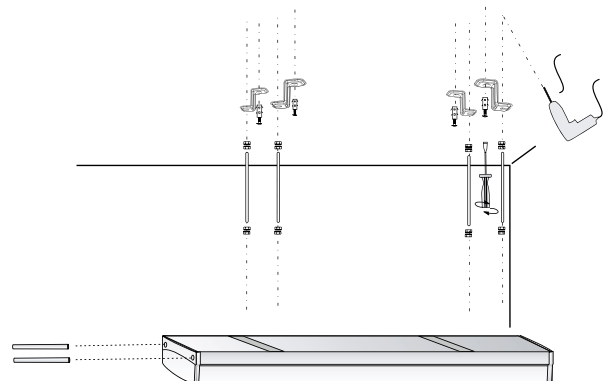

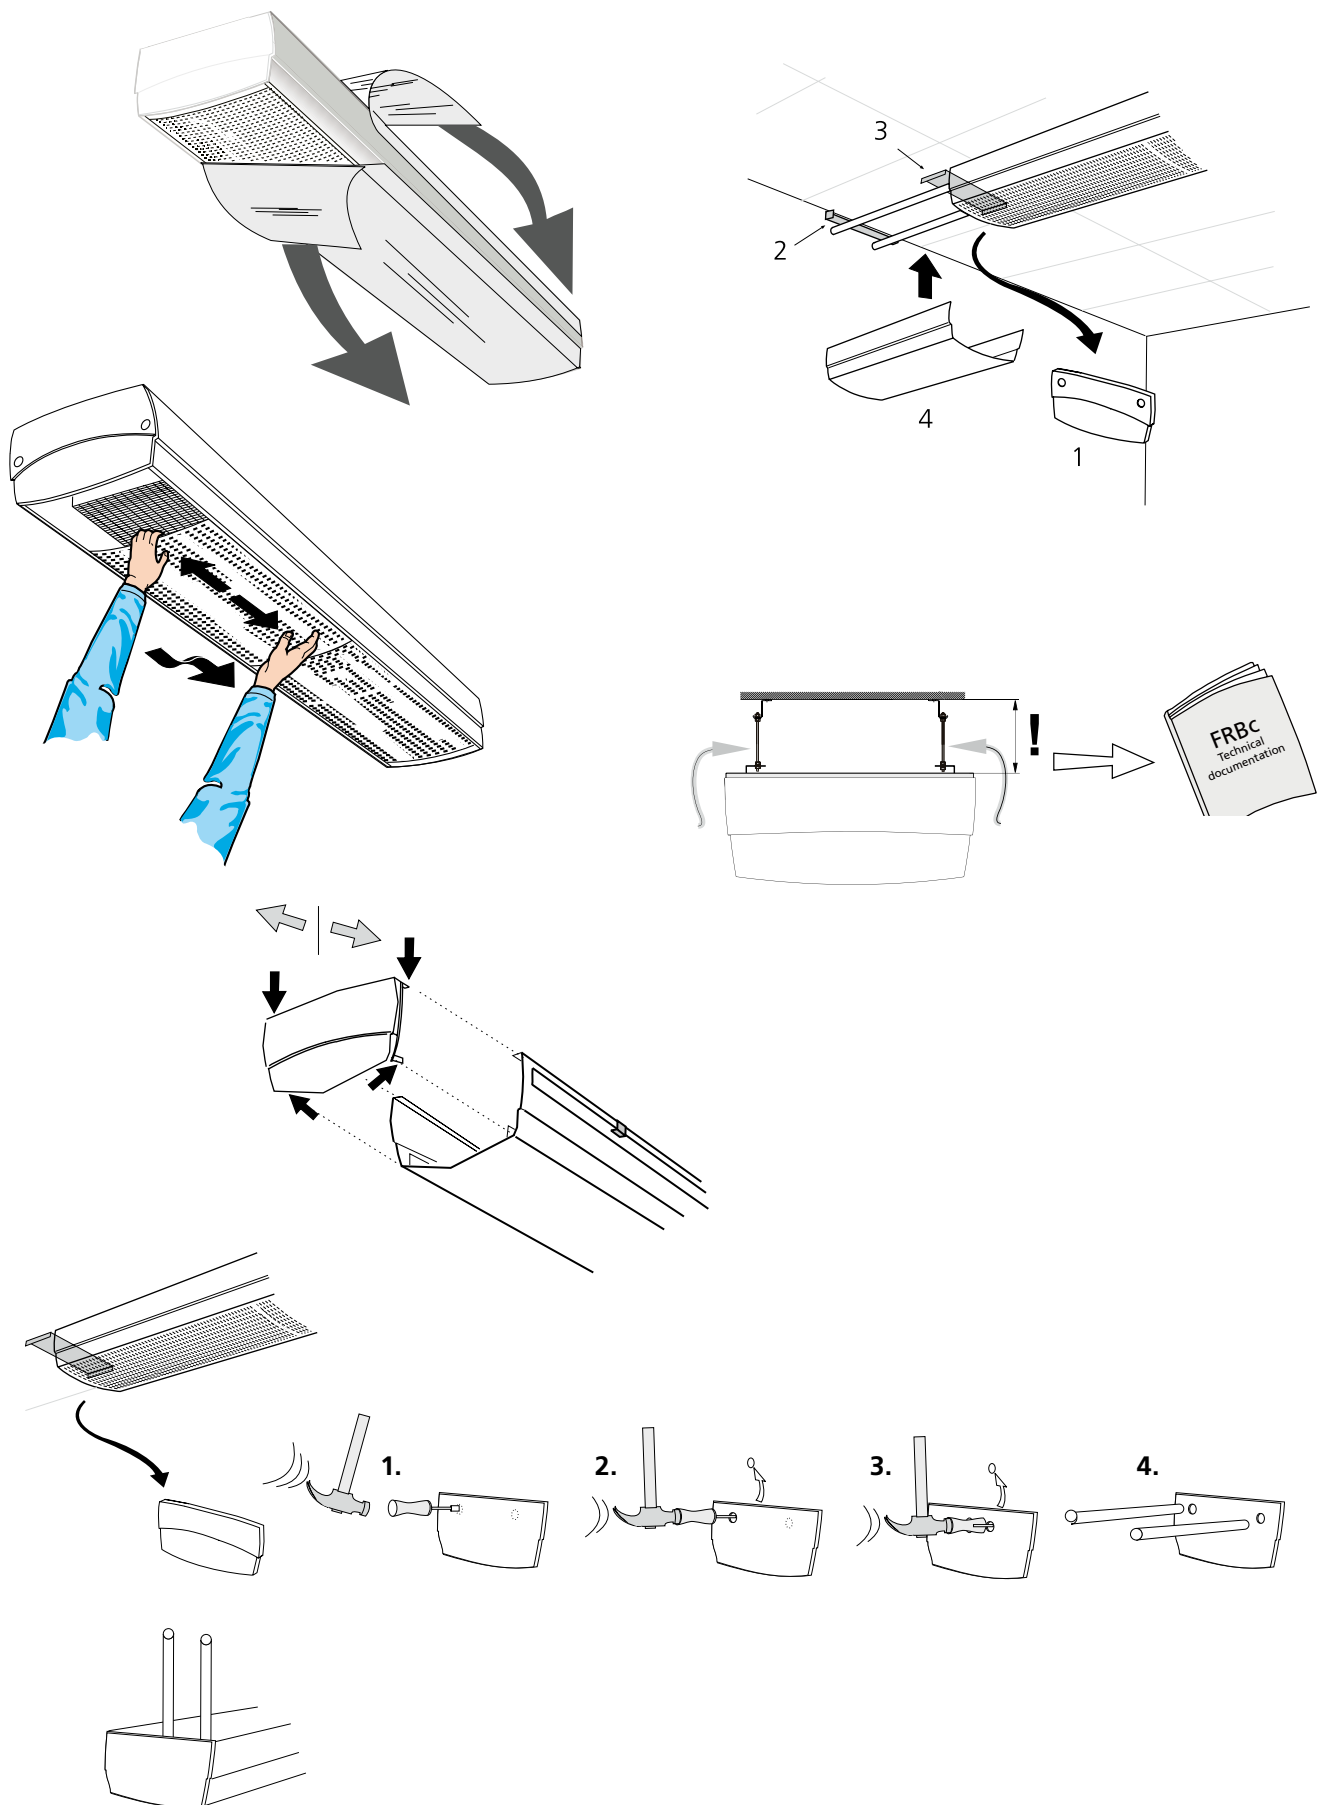


# Maintenance


1

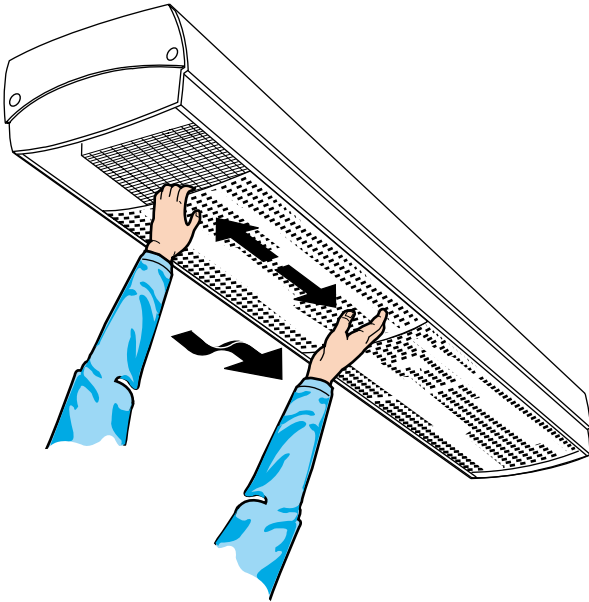


3

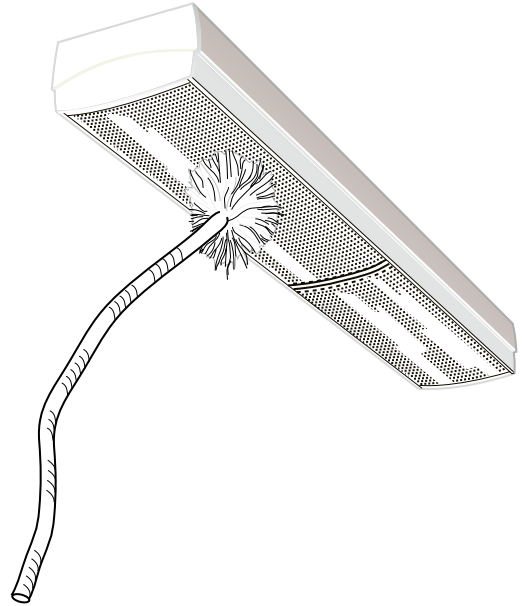

2

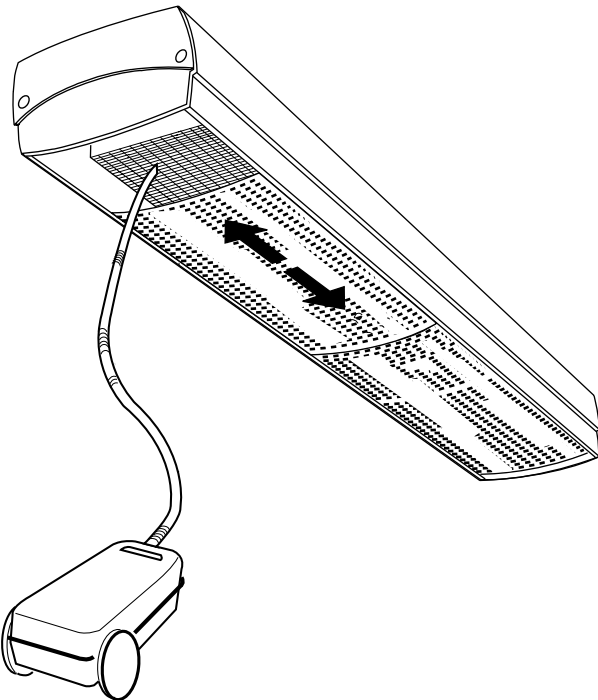



ArtNo 942428006