


















## AIR HANDLING UNIT DATA AND DIMENSIONS

GOLD | SILVER C | GLOBAL | ESENSA |  
COMPACT Air | CLASS UNIT | MURAL | CASA

|                         |                                                                                     |                                                                                     | INSTALLATION POSSIBILITIES |                     |          | COOLING / HEATING POSSIBILITIES |            |             |              |              |                      |                                                                                                                                                                             |
|-------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|----------------------------|---------------------|----------|---------------------------------|------------|-------------|--------------|--------------|----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                         |                                                                                     |                                                                                     | HEAT EXCHANGER             | FUNCTIONS & OPTIONS | OUT-DOOR | CEILING MOUNTING                | CONNECTION | PRE HEATING | POST HEATING | POST COOLING | INTEGRATED HEAT PUMP | CERTIFICATIONS                                                                                                                                                              |
| GOLD/SILVER C RX/RX Top |    |    | ● ● ●                      | ✓                   |          |                                 | ⇄          | ✓           | ✓            | ✓            |                      |       |
| GOLD RX/HC GOLD RX/C    |    |    | ● ● ●                      | ✓                   |          |                                 | ⇄          | ✓           | ✓            | ✓            | ✓                    |                                                                                          |
| GOLD/SILVER C PX/PX Top |    |    | ● ● ●                      | ✓                   |          |                                 | ⇄          | ✓           | ✓            | ✓            |                      |                                                                                          |
| GOLD/SILVER C CX        |    |    | ● ● ●                      | ✓                   |          |                                 | ⇄          | ✓           | ✓            | ✓            |                      |                                                                                          |
| GOLD/SILVER C SD        |    |    | ● ●                        | ✓                   |          |                                 | ⇄          | ✓           | ✓            | ✓            |                      |                                                                                          |
| GLOBAL RX/RX Top        |    |    | ● ●                        | ✓                   |          |                                 | ⇄          |             | ✓            | ✓            |                      |                                                                                          |
| GLOBAL PX/PX Top        |    |    | ● ●                        | ✓                   |          |                                 | ⇄          | ✓           | ✓            | ✓            |                      |                                                                                          |
| GLOBAL PX LP            |   |   | ● ●                        |                     | ✓        |                                 | ⇄          | ✓           | ✓            | ✓            |                      |                                                                                         |
| GLOBAL SD               |  |                                                                                     | ●                          | ✓                   |          |                                 | ⇄          |             | ✓            | ✓            |                      |                                                                                        |
| ESENSA PX Top           |  |  | ● ●                        |                     |          |                                 | ⇄          | ✓           | ✓            | ✓            |                      |                                                                                        |
| ESENSA RX Top           |  |  | ● ●                        |                     |          |                                 | ⇄          |             | ✓            | ✓            |                      |                                                                                        |
| ESENSA Flex             |  |  | ● ●                        | ✓                   |          |                                 | ⇄          | ✓           | ✓            | ✓            |                      |                                                                                        |
| MURAL                   |  |  | ● ●                        | ✓                   |          |                                 | ⇄          | ✓           | ✓            | ✓            |                      |                                                                                                                                                                             |
| COMPACT Air             |  |  | ●                          |                     |          |                                 | ⇄          |             | ✓            |              |                      |                                                                                                                                                                             |
| CLASS UNIT PX/PX Top    |  |  | ●                          |                     | ✓        |                                 | ⇄          |             | ✓            |              |                      |                                                                                                                                                                             |
| CASA R                  |  |  | ● ● ●                      |                     | ✓        |                                 | ⇄          | ✓           | ✓            | ✓            |                      |   |
| CASA W                  |  |  | ● ● ●                      |                     |          |                                 | ⇄          | ✓           | ✓            | ✓            |                      |                                                                                        |

AIR FLOW m³/h


0 72 144 216 288 360 720 1080 1440 1800 2160 2520 2880 3240 3600 7200 10800 14400 18000 21600 25200 28800 32400 36000 39600 43200

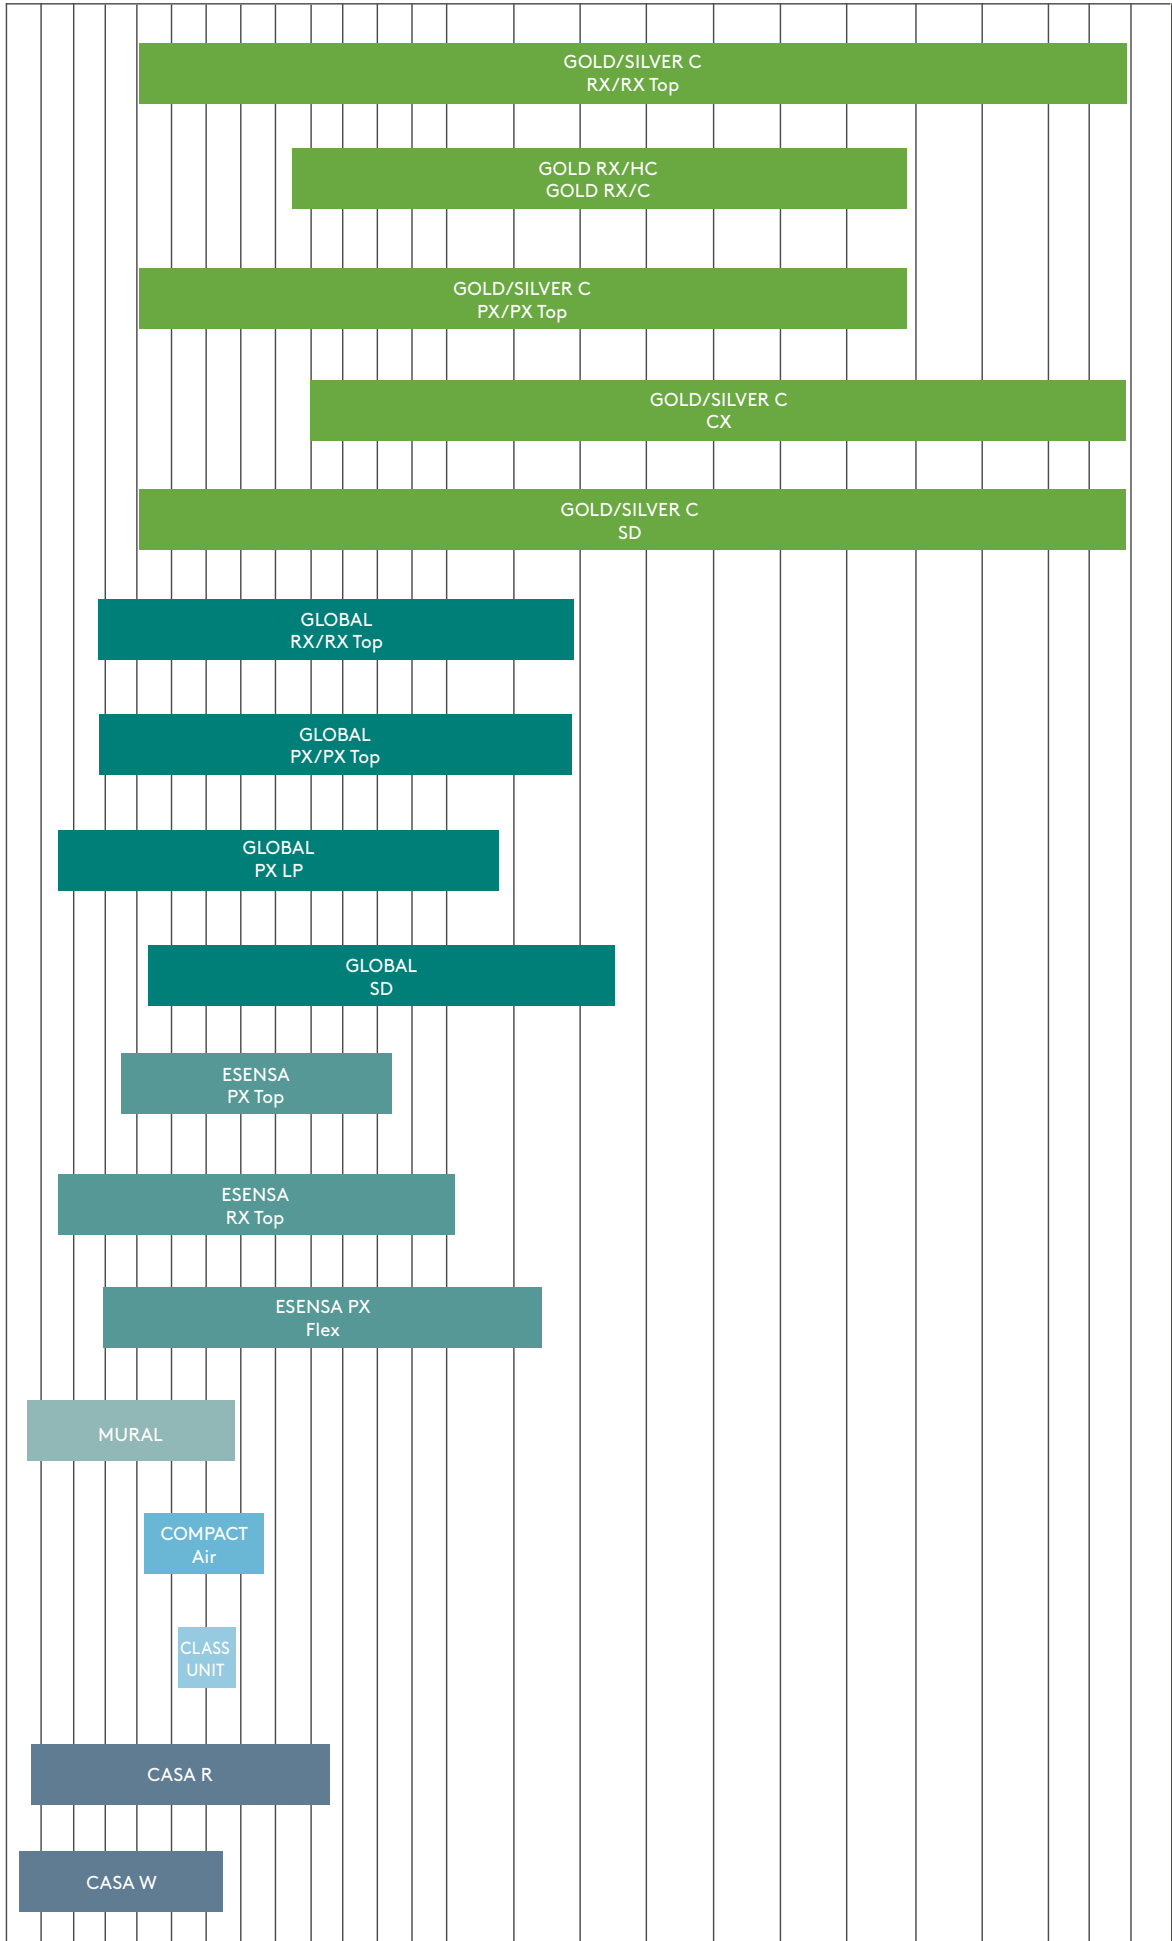

0 0,02 0,04 0,06 0,08 0,1 0,2 0,3 0,4 0,5 0,6 0,7 0,8 0,9 1 2 3 4 5 6 7 8 9 10 11 12

AIR FLOW m³/s

# GOLD/SILVER C RX/RX Top

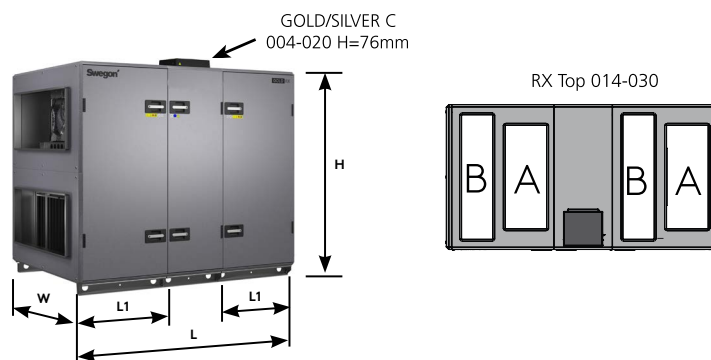


|         | Ecodesign          |                    | SFP 1,5<br>150 Pa  |                    | SFP 2,0<br>200 Pa  |                    | Connections                           |                                | Dimensions                |           |           |                | Longest<br>section       |                |
|---------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|---------------------------------------|--------------------------------|---------------------------|-----------|-----------|----------------|--------------------------|----------------|
| Size    | Air flow<br>(m³/h) | Air flow<br>(m³/s) | Air flow<br>(m³/h) | Air flow<br>(m³/s) | Air flow<br>(m³/h) | Air flow<br>(m³/s) | Duct<br>connection (mm) <sup>3)</sup> | Power<br>connection            | L<br>(mm)                 | W<br>(mm) | H<br>(mm) | Weight<br>(kg) | L1<br>(mm)               | Weight<br>(kg) |
| 004     | 290 - 1620         | 0,08 - 0,5         | 1356               | 0,4                | 1620               | 0,5                | Ø 315                                 | 1 x 230V, 10A <sup>2)</sup>    | 1499 / 1799 <sup>1)</sup> | 825       | 1020      | 234 - 335      | 1499 / 617 <sup>1)</sup> | 88 - 112       |
| 005     | 290 - 1960         | 0,08 - 0,5         | 1356               | 0,4                | 1800               | 0,5                | Ø 315                                 | 1 x 230V, 10/16A <sup>2)</sup> | 1499 / 1799 <sup>1)</sup> | 825       | 1020      | 234 - 335      | 1499 / 617 <sup>1)</sup> | 88 - 112       |
| 007     | 290 - 2700         | 0,08 - 0,8         | 2196               | 0,6                | 2700               | 0,8                | Ø 400                                 | 1 x 230V, 10/16A <sup>2)</sup> | 1619 / 1860 <sup>1)</sup> | 995       | 1185      | 281 - 412      | 1619 / 647 <sup>1)</sup> | 103 - 138      |
| 008     | 720 - 3110         | 0,2 - 0,9          | 2310               | 0,6                | 2925               | 0,8                | Ø 400                                 | 1 x 230V, 16A <sup>2)</sup>    | 1619 / 1860 <sup>1)</sup> | 995       | 1185      | 295 - 420      | 1619 / 647 <sup>1)</sup> | 110 - 142      |
| 011     | 720 - 3960         | 0,2 - 1,1          | 3259               | 0,9                | 3960               | 1,1                | Ø 500                                 | 1 x 230V, 16A <sup>2)</sup>    | 1859                      | 1199      | 1395      | 427 - 527      | 647                      | 135 - 175      |
| 012     | 720 - 4390         | 0,2 - 1,2          | 3463               | 1,0                | 4341               | 1,2                | Ø 500                                 | 3 x 400V, 10A                  | 1859                      | 1199      | 1395      | 450 - 554      | 647                      | 146 - 189      |
| 014     | 720 - 5940         | 0,2 - 1,7          | 5130               | 1,4                | 5940               | 1,7                | 1000 x 400                            | 3 x 400V, 10A                  | 2080                      | 1400      | 1651      | 572 - 746      | 758                      | 190 - 264      |
| 020     | 1080 - 6560        | 0,3 - 1,8          | 5364               | 1,5                | 6876               | 1,9                | 1000 x 400                            | 3 x 400V, 10/16A               | 2080                      | 1400      | 1651      | 572 - 746      | 758                      | 190 - 264      |
| 025     | 1080 - 8600        | 0,3 - 2,4          | 7136               | 2,0                | 8784               | 2,4                | 1200 x 500                            | 3 x 400V, 10/16A               | 2261                      | 1600      | 1911      | 744 - 971      | 848                      | 249 - 345      |
| 030     | 1080 - 8890        | 0,5 - 2,5          | 7296               | 2,0                | 9225               | 2,6                | 1200 x 500                            | 3 x 400V, 20A                  | 2261                      | 1600      | 1911      | 744 - 971      | 848                      | 249 - 345      |
| 035     | 1800 - 12900       | 0,5 - 3,6          | 10860              | 3,0                | 13069              | 3,6                | 1400 x 600                            | 3 x 400V, 20A                  | 2642                      | 1990      | 2259      | 1096 - 1405    | 1039                     | 377 - 504      |
| 040     | 2700 - 14000       | 0,8 - 3,9          | 11952              | 3,3                | 14976              | 4,2                | 1400 x 600                            | 3 x 400V, 25/40A               | 2642                      | 1990      | 2259      | 1096 - 1405    | 1039                     | 377 - 504      |
| 050     | 2700 - 17800       | 0,8 - 4,9          | 15120              | 4,2                | 18000              | 5,0                | 1600 x 800                            | 3 x 400V, 25/40A               | 2642                      | 2318      | 2388      | 1298 - 1752    | 1039                     | 444 - 630      |
| 060     | 3600 - 18500       | 1,0 - 5,1          | 15583              | 4,3                | 19667              | 5,5                | 1600 x 800                            | 3 x 400V, 32/50A               | 2642                      | 2318      | 2388      | 1298 - 1752    | 1039                     | 444 - 630      |
| 070     | 3600 - 25200       | 1,0 - 7,0          | 22680              | 6,3                | 26640              | 7,4                | 1800 x 1000                           | 3 x 400V, 32/50A               | 3112                      | 2637      | 2740      | 2218 - 2649    | 1274                     | 786 - 956      |
| 070+    | 3600 - 28800       | 1,0 - 8,0          | 25560              | 7,1                | 28800              | 8,0                | 1800 x 1000                           | 3 x 400V, 32/50A               | 3343                      | 2970      | 3070      | 2614 - 3335    | 1274                     | 807 - 1070     |
| 080     | 5400 - 25200       | 1,5 - 7,0          | 22680              | 6,3                | 27360              | 7,6                | 1800 x 1000                           | 3 x 400V, 50/80A               | 3112                      | 2637      | 2740      | 2218 - 2649    | 1274                     | 786 - 956      |
| 080+    | 5400 - 31320       | 1,5 - 8,7          | 27000              | 7,5                | 31320              | 8,7                | 1800 x 1000                           | 3 x 400V, 50/80A               | 3343                      | 2970      | 3070      | 2614 - 3335    | 1274                     | 807 - 1070     |
| 100     | 5400 - 37950       | 1,5 - 10,5         | 31320              | 8,7                | 38618              | 10,7               | 2400 x 1200                           | 3 x 400V, 50/80A               | 3322                      | 3340      | 3440      | 3324 - 3910    | 1122                     | 1024-1104      |
| 120     | 9000 - 39180       | 2,5 - 10,9         | 32400              | 9,0                | 40358              | 11,2               | 2400 x 1200                           | 3 x 400V, 80/125A              | 3322                      | 3340      | 3440      | 3524 - 4128    | 1122                     | 1124 - 1240    |
| 004 Top | 290 - 1620         | 0,08 - 0,5         | 1215               | 0,3                | 1618               | 0,4                | Ø 315                                 | 1 x 230V, 10A <sup>2)</sup>    | 1600                      | 825       | 1185      | 295 - 302      | 1600                     | -              |
| 005 Top | 290 - 1840         | 0,08 - 0,5         | 1215               | 0,3                | 1618               | 0,4                | Ø 315                                 | 1 x 230V, 10/16A <sup>2)</sup> | 1600                      | 825       | 1185      | 295 - 310      | 1600                     | -              |
| 007 Top | 290 - 2540         | 0,08 - 0,7         | 2028               | 0,6                | 2516               | 0,7                | Ø 400                                 | 1 x 230V, 10/16A <sup>2)</sup> | 1720                      | 995       | 1395      | 351 - 376      | 1720                     | -              |
| 008 Top | 720 - 2770         | 0,2 - 0,8          | 2099               | 0,6                | 2610               | 0,7                | Ø 400                                 | 1 x 230V, 16A <sup>2)</sup>    | 1720                      | 995       | 1395      | 369 - 382      | 1720                     | -              |
| 011 Top | 720 - 3950         | 0,2 - 1,1          | 3186               | 0,9                | 3960               | 1,1                | Ø 500                                 | 1 x 230V, 16A <sup>2)</sup>    | 2219                      | 1199      | 1395      | 527 - 549      | 827                      | 185 - 186      |
| 012 Top | 720 - 4270         | 0,2 - 1,2          | 3288               | 0,9                | 4122               | 1,1                | Ø 500                                 | 3 x 400V, 10A                  | 2219                      | 1199      | 1395      | 550 - 576      | 827                      | 196 - 200      |
| 014 Top | 720 - 5940         | 0,2 - 1,7          | 5040               | 1,4                | 5940               | 1,7                | 1000 x 400 (A)<br>1200 x 300 (B)      | 3 x 400V, 10A                  | 2643                      | 1400      | 1651      | 726 - 832      | 1039                     | 267 - 307      |
| 020 Top | 1080 - 6530        | 0,3 - 1,8          | 5400               | 1,5                | 5871               | 1,6                | 1000 x 400 (A)<br>1200 x 300 (B)      | 3 x 400V, 10/16A               | 2643                      | 1400      | 1651      | 726 - 832      | 1039                     | 267 - 307      |
| 025 Top | 1080 - 8210        | 0,3 - 2,3          | 6668               | 1,9                | 8156               | 2,3                | 1200 x 400 (A)<br>1400 x 300 (B)      | 3 x 400V, 10/16A               | 2643                      | 1600      | 1911      | 884 - 1033     | 1039                     | 319 - 376      |
| 030 Top | 1800 - 8160        | 0,5 - 2,3          | 6435               | 1,8                | 8252               | 2,3                | 1200 x 400 (A)<br>1400 x 300 (B)      | 3 x 400V, 20A                  | 2643                      | 1600      | 1911      | 884 - 1033     | 1039                     | 319 - 376      |

1) Common casing/split version

2) Alt. 3 x 400V, 10A

3) Alternative full-face duct connection available (not for Top versions)

# GOLD/SILVER C PX/PX Top

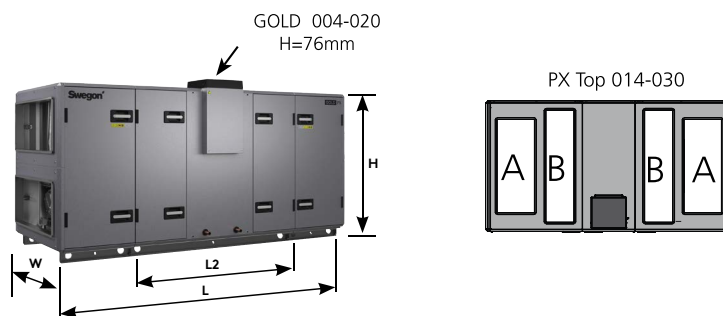


|         | Ecodesign          |                    | SFP 1,5<br>150 Pa  |                    | SFP 2,0<br>200 Pa  |                    | Connections                           |                                              | Dimensions              |           |           |                | Longest<br>section |                |
|---------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|---------------------------------------|----------------------------------------------|-------------------------|-----------|-----------|----------------|--------------------|----------------|
| Size    | Air flow<br>(m³/h) | Air flow<br>(m³/s) | Air flow<br>(m³/h) | Air flow<br>(m³/s) | Air flow<br>(m³/h) | Air flow<br>(m³/s) | Duct<br>connection (mm) <sup>1)</sup> | Power<br>connection                          | L<br>(mm)               | W<br>(mm) | H<br>(mm) | Weight<br>(kg) | L2<br>(mm)         | Weight<br>(kg) |
| 004     | 290 - 2012         | 0,08 - 0,5         | 1468               | 0,4                | 1620               | 0,5                | Ø 315                                 | 1 x 230V, 10A <sup>2)</sup>                  | 2333/2534 <sup>1)</sup> | 901       | 1020      | 349 - 490      | 1300               | 262 - 266      |
| 005     | 290 - 1944         | 0,08 - 0,5         | 1620               | 0,5                | 2012               | 0,6                | Ø 315                                 | 1 x 230V, 10/16A <sup>2)</sup>               | 2333/2534 <sup>1)</sup> | 901       | 1020      | 349 - 490      | 1300               | 262 - 266      |
| 007     | 290 - 2793         | 0,08 - 0,8         | 2356               | 0,7                | 2700               | 0,8                | Ø 400                                 | 1 x 230V, 10/16A <sup>2)</sup>               | 2503/2811 <sup>1)</sup> | 1071      | 1185      | 435 - 623      | 1517               | 341 - 347      |
| 008     | 720 - 2844         | 0,2 - 0,8          | 2482               | 0,7                | 2980               | 0,8                | Ø 400                                 | 1 x 230V, 16A <sup>2)</sup>                  | 2503/2811 <sup>1)</sup> | 1071      | 1185      | 449 - 631      | 1517               | 341 - 347      |
| 011     | 720 - 3883         | 0,2 - 1,1          | 3367               | 0,9                | 3960               | 1,1                | Ø 500                                 | 1 x 230V, 16A <sup>2)</sup>                  | 2925                    | 1275      | 1395      | 715 - 804      | 1631               | 444 - 454      |
| 012     | 720 - 3993         | 0,2 - 1,1          | 3561               | 1,0                | 4320               | 1,2                | Ø 500                                 | 3 x 400V, 10A                                | 2925                    | 1275      | 1395      | 736 - 832      | 1631               | 444 - 454      |
| 014     | 720 - 6495         | 0,2 - 1,7          | 5976               | 1,7                | 5940               | 1,7                | 1000 x 400                            | 3 x 400V, 10A                                | 3351                    | 1476      | 1651      | 929 - 1049     | 1836               | 549 - 561      |
| 020     | 1080 - 6844        | 0,3 - 1,9          | 6768               | 1,9                | 7560               | 2,1                | 1000 x 400                            | 3 x 400V, 10/16A                             | 3351                    | 1476      | 1651      | 949 - 1089     | 1836               | 549 - 561      |
| 025     | 1080 - 9000        | 0,3 - 2,5          | 8280               | 2,3                | 9000               | 2,5                | 1200 x 500                            | 3 x 400V, 10/16A                             | 3825                    | 1746      | 1911      | 1235 - 1427    | 2130               | 737 - 761      |
| 030     | 1800 - 9537        | 0,5 - 2,6          | 9000               | 2,5                | 10855              | 3,0                | 1200 x 500                            | 3 x 400V, 16/20A                             | 3825                    | 1746      | 1911      | 1287 - 1451    | 2130               | 737 - 761      |
| 035     | 1800 - 12803       | 0,5 - 3,6          | 11786              | 3,3                | 14040              | 3,9                | 1400 x 600                            | 3 x 400V, 16/20A                             | 4477                    | 2136      | 2259      | 1792 - 2038    | 2400               | 1038 - 1074    |
| 040     | 2700-14476         | 0,8 - 4,0          | 13176              | 3,7                | 15948              | 4,4                | 1400 x 600                            | 3 x 400V, 25/40A                             | 4477                    | 2136      | 2259      | 1818 - 2064    | 2400               | 1038 - 1074    |
| 040+    | 2700-16560         | 0,8-4,6            | 15012              | 4,2                | 17928              | 5,0                | 1400 x 600                            | 3 x 400V, 25/40A                             | 4507                    | 2592      | 2259      | 2180 - 2462    | 2430               | 1426 - 1454    |
| 050+    | 2700-17262         | 0,8-4,8            | 16020              | 4,4                | 19188              | 5,3                | 1600 x 800                            | 3 x 400V, 25/32A                             | 4507                    | 2592      | 2388      | 2290 - 2690    | 2430               | 1402 - 1430    |
| 060+    | 3600-18112         | 1,0-5,0            | 17280              | 4,8                | 20952              | 5,8                | 1600 x 800                            | 3 x 400V, 32/50A                             | 4507                    | 2592      | 2388      | 2290 - 2690    | 2430               | 1402 - 1430    |
| 070     | 3600-24840         | 1,0-6,9            | 24120              | 6,7                | 27900              | 7,8                | 1800 x 1000                           | 3 x 400V, 32/50A                             | 5443                    | 2783      | 2740      | 3273 - 3765    | 2896               | 2385 - 2505    |
| 080     | 5040-24740         | 1,4-6,9            | 24120              | 6,7                | 29050              | 8,1                | 1800 x 1000                           | 3 x 400V, 50/80A                             | 5443                    | 2783      | 2740      | 3273 - 3765    | 2896               | 2385 - 2505    |
| 004 Top | 290 - 2032         | 0,08 - 0,5         | 1401               | 0,4                | 1620               | 0,5                | Ø 315                                 | 1 x 230V, 10A <sup>2)</sup>                  | 2534                    | 901       | 1185      | 480 - 484      | 1300               | 262 - 266      |
| 005 Top | 290 - 2032         | 0,08 - 0,6         | 1401               | 0,4                | 1736               | 0,5                | Ø 315                                 | 1 x 230V, 10/16A <sup>2)</sup>               | 2534                    | 901       | 1185      | 480 - 492      | 1300               | 262 - 266      |
| 007 Top | 290 - 2534         | 0,08 - 0,7         | 2118               | 0,6                | 2556               | 0,7                | Ø 400                                 | 1 x 230V, 10/16A <sup>2)</sup>               | 2811                    | 1071      | 1395      | 599 - 613      | 1517               | 341 - 347      |
| 008 Top | 720 - 2533         | 0,2 - 0,7          | 2152               | 0,6                | 2603               | 0,7                | Ø 400                                 | 1 x 230V, 16A <sup>2)</sup><br>3 x 400V, 10A | 2811                    | 1071      | 1395      | 613 - 621      | 1517               | 341 - 347      |
| 011 Top | 720 - 3793         | 0,2 - 1,1          | 3300               | 0,9                | 3960               | 1,1                | Ø 500                                 | 1 x 230V, 16A <sup>2)</sup><br>3 x 400V, 10A | 3285                    | 1275      | 1395      | 814 - 826      | 1631               | 444 - 454      |
| 012 Top | 720 - 3831         | 0,2 - 1,1          | 3375               | 0,9                | 4140               | 1,2                | Ø 500                                 | 3 x 400V, 10A                                | 3285                    | 1275      | 1395      | 836 - 854      | 1631               | 444 - 454      |
| 014 Top | 720 - 6534         | 0,2 - 1,7          | 5796               | 1,6                | 5940               | 1,7                | 1000 x 400 (A)<br>1200 x 300 (B)      | 3 x 400V, 10A                                | 3914                    | 1476      | 1651      | 1083 - 1131    | 1836               | 549 - 561      |
| 020 Top | 1080 - 6713        | 0,3 - 1,9          | 6438               | 1,8                | 7560               | 2,1                | 1000 x 400 (A)<br>1200 x 300 (B)      | 3 x 400V, 10/16A                             | 3914                    | 1476      | 1651      | 1103 - 1175    | 1836               | 549 - 561      |
| 025 Top | 1080 - 8331        | 0,3 - 2,3          | 7760               | 2,2                | 9000               | 2,5                | 1200 x 400 (A)<br>1400 x 300 (B)      | 3 x 400V, 10/16A                             | 4208                    | 1746      | 1911      | 1375 - 1489    | 2130               | 737 - 761      |
| 030 Top | 1800 - 8315        | 0,5 - 2,3          | 9480               | 2,6                | 9736               | 2,7                | 1200 x 400 (A) 1<br>1400 x 300 (B)    | 3 x 400V, 16/20A                             | 4208                    | 1746      | 1911      | 1427 - 1513    | 2130               | 737 - 761      |

1) Common casing/split version

2) Alt. 3 x 400V, 10A

3) Alternative full-face duct connection available (not for Top versions)

# GOLD/SILVER C CX

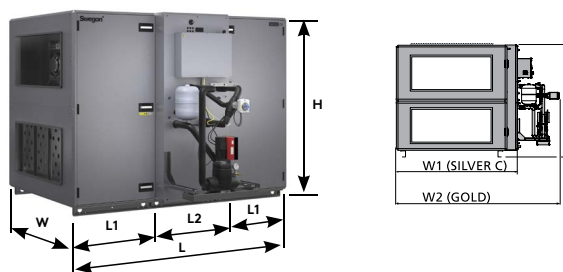


|      | Ecodesign          |                    | SFP 1,5<br>150 Pa  |                    | SFP 2,0<br>200 Pa  |                    | Connections                           |                     | Dimensions |            |            |           |                | Sections   |             |            |             |
|------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|---------------------------------------|---------------------|------------|------------|------------|-----------|----------------|------------|-------------|------------|-------------|
| Size | Air flow<br>(m³/h) | Air flow<br>(m³/s) | Air flow<br>(m³/h) | Air flow<br>(m³/s) | Air flow<br>(m³/h) | Air flow<br>(m³/s) | Duct<br>connection (mm) <sup>1)</sup> | Power<br>connection | L<br>(mm)  | W1<br>(mm) | W2<br>(mm) | H<br>(mm) | Weight<br>(kg) | L1<br>(mm) | L1<br>(kg)  | L2<br>(mm) | L2<br>(kg)  |
| 035  | 1800 - 14040       | 0,5 - 3,9          | 11580              | 3,2                | 13464              | 3,7                | 1400 x 600                            | 3 x 400V, 20/25A    | 2977       | 2190       | 2890       | 2259      | 1934 - 2144    | 1039       | 377 - 482   | 900        | 1180        |
| 040  | 2700 - 15837       | 0,8 - 4,4          | 13234              | 3,7                | 15751              | 4,4                | 1400 x 600                            | 3 x 400V, 32/40A    | 2977       | 2190       | 2890       | 2259      | 1960 - 2170    | 1039       | 390 - 495   | 900        | 1180        |
| 050  | 2700 - 19328       | 0,8 - 5,4          | 16009              | 4,4                | 18000              | 5,0                | 1600 x 800                            | 3 x 400V, 32/40A    | 2977       | 2518       | 3259       | 2388      | 2346 - 2584    | 1039       | 444 - 563   | 900        | 1458        |
| 060  | 3600 - 20168       | 1,0 - 5,6          | 17169              | 4,8                | 20993              | 5,8                | 1600 x 800                            | 3 x 400V, 40/50A    | 2977       | 2518       | 3259       | 2388      | 2480 - 2718    | 1039       | 511 - 630   | 900        | 1458        |
| 070  | 3600 - 24394       | 1,0 - 6,8          | 20957              | 5,8                | 24800              | 6,9                | 1800 x 1000                           | 3 x 400V, 40/63A    | 3447       | 2837       | 3580       | 2740      | 3454 - 3704    | 1274       | 786 - 911   | 900        | 1882        |
| 080  | 5400 - 24830       | 1,5 - 6,9          | 21185              | 5,9                | 25586              | 7,1                | 1800 x 1000                           | 3 x 400V, 63/80A    | 3447       | 2837       | 3580       | 2740      | 3508 - 3902    | 1274       | 813 - 1010  | 900        | 1882        |
| 100  | 5400 - 38058       | 1,5 - 10,6         | 31860              | 8,9                | 37800              | 10,5               | 2400 x 1200                           | 3 x 400V, 50/80A    | 3322       | 3740       | 4283       | 3440      | 4294 - 4880    | 1126       | 1046 - 1314 | 1070       | 1101 - 1126 |
| 120  | 9000 - 39188       | 2,5 - 10,9         | 32760              | 9,1                | 39960              | 11,1               | 2400 x 1200                           | 3 x 400V, 80/125A   | 3322       | 3740       | 4283       | 3440      | 4494 - 5152    | 1126       | 1146 - 1450 | 1070       | 1101 - 1126 |

1) Alternative full-face duct connection available

# GOLD RX/HC


# GOLD RX/C

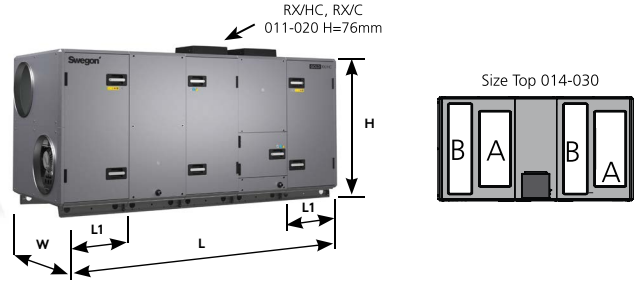

| Size    | Ecodesign          |                    | SFP 1,5<br>150 Pa  |                    | SFP 2,0<br>200 Pa  |                    | Connections                           |                                   | Dimensions |           |           |                | Longest<br>section |                |
|---------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|---------------------------------------|-----------------------------------|------------|-----------|-----------|----------------|--------------------|----------------|
|         | Air flow<br>(m³/h) | Air flow<br>(m³/s) | Air flow<br>(m³/h) | Air flow<br>(m³/s) | Air flow<br>(m³/h) | Air flow<br>(m³/s) | Duct<br>connection (mm) <sup>2)</sup> | Power<br>connection <sup>1)</sup> | L<br>(mm)  | W<br>(mm) | H<br>(mm) | Weight<br>(kg) | L1<br>(mm)         | Weight<br>(kg) |
| 011     | 1620 - 3960        | 0,45 - 1,1         | 3060               | 0,9                | 3803               | 1,1                | Ø 500                                 | 3 x 400V+N+PE 16A                 | 2989       | 1199      | 1395      | 737 - 835      | 647                | 135 - 175      |
| 012     | 1800 - 4390        | 0,5 - 1,2          | 3168               | 0,9                | 3997               | 1,1                | Ø 500                                 | 3 x 400V+N+PE 25A                 | 2989       | 1199      | 1395      | 765 - 868      | 647                | 146 - 189      |
| 014     | 2700 - 5940        | 0,75 - 1,7         | 4791               | 1,3                | 5997               | 1,7                | 1000 x 400                            | 3 x 400V+N+PE 25A                 | 3210       | 1400      | 1651      | 934 - 1062     | 758                | 190 - 244      |
| 020     | 2700 - 9500        | 0,75 - 2,6         | 4896               | 1,4                | 6270               | 1,7                | 1000 x 400                            | 3 x 400V+N+PE 25A                 | 3210       | 1400      | 1651      | 964 - 1112     | 758                | 200 - 264      |
| 025     | 3420 - 8600        | 0,95 - 2,4         | 6696               | 1,9                | 7869               | 2,2                | 1200 x 500                            | 3 x 400V+N+PE 25A                 | 3391       | 1600      | 1911      | 1238 - 1426    | 848                | 249 - 333      |
| 030     | 3420 - 8890        | 0,95 - 2,5         | 6615               | 1,8                | 8407               | 2,3                | 1200 x 500                            | 3 x 400V+N+PE 32A                 | 3391       | 1600      | 1911      | 1300 - 1460    | 848                | 275 - 345      |
| 035     | 5400 - 12900       | 1,5 - 3,6          | 10260              | 2,9                | 12500              | 3,5                | 1400 x 600                            | 3 x 400V+N+PE 50A                 | 3772       | 1990      | 2259      | 1664 - 1894    | 1039               | 377 - 482      |
| 040     | 3960 - 14000       | 1,1 - 3,9          | 11040              | 3,1                | 13560              | 3,8                | 1400 x 600                            | 3 x 400V+N+PE 50A                 | 3772       | 1990      | 2259      | 1740 - 1970    | 1039               | 390 - 495      |
| 050     | 5040 - 17800       | 1,4 - 4,9          | 14112              | 3,9                | 17084              | 4,7                | 1600 x 800                            | 3 x 400V+N+PE 63A                 | 3892       | 2318      | 2388      | 2138 - 2396    | 1039               | 444 - 563      |
| 060     | 5400 - 18500       | 1,5 - 5,1          | 14040              | 3,9                | 17600              | 4,9                | 1600 x 800                            | 3 x 400V+N+PE 63A                 | 3892       | 2318      | 2388      | 2322 - 2580    | 1039               | 511 - 630      |
| 070     | 7200 - 24400       | 2,0 - 6,8          | 18000              | 5,0                | 22320              | 6,2                | 1800 x 1000                           | 3 x 400V+N+PE 63A                 | 4362       | 2637      | 2740      | 3322 - 3592    | 1274               | 786 - 911      |
| 080     | 7560 - 24800       | 2,1 - 6,9          | 17520              | 4,9                | 22320              | 6,2                | 1800 x 1000                           | 3 x 400V+N+PE 80A                 | 4362       | 2637      | 2740      | 3426 - 3840    | 1274               | 813 - 1010     |
| 011 Top | 1620 - 3950        | 0,45 - 1,1         | 3000               | 0,8                | 3706               | 1,0                | Ø 500                                 | 3 x 400V+N+PE 16A                 | 3349       | 1199      | 1395      | 837 - 867      | 827                | 185 - 186      |
| 012 Top | 1800 - 4270        | 0,5 - 1,2          | 3007               | 0,8                | 3816               | 1,1                | Ø 500                                 | 3 x 400V+N+PE 25A                 | 3349       | 1199      | 1395      | 865 - 901      | 827                | 196 - 200      |
| 014 Top | 2700 - 5940        | 0,75 - 1,7         | 4680               | 1,3                | 5887               | 1,6                | 1000 x 400 (A)<br>1200 x 300 (B)      | 3 x 400V+N+PE 25A                 | 3773       | 1400      | 1651      | 1088 - 1156    | 1039               | 267 - 285      |
| 020 Top | 2700 - 6530        | 0,75 - 1,8         | 4909               | 1,4                | 6180               | 1,7                | 1000 x 400 (A)<br>1200 x 300 (B)      | 3 x 400V+N+PE 25A                 | 3773       | 1400      | 1651      | 1118 - 1210    | 1039               | 277 - 307      |
| 025 Top | 3420 - 8210        | 0,95 - 2,3         | 6223               | 1,7                | 7650               | 2,1                | 1200 x 400 (A)<br>1400 x 300 (B)      | 3 x 400V+N+PE 25A                 | 3773       | 1600      | 1911      | 1378 - 1507    | 1039               | 319 - 364      |
| 030 Top | 3420 - 8160        | 0,95 - 2,3         | 5968               | 1,7                | 7560               | 2,1                | 1200 x 400 (A)<br>1400 x 300 (B)      | 3 x 400V+N+PE 32A                 | 3773       | 1600      | 1911      | 1440 - 1541    | 1039               | 345 - 376      |

1) Power supply GOLD RX, see GOLD RX chart.  
2) Alternative full-face duct connection available (not for Top versions)

# COOL DX



COOL DX is a chiller available for end panel panel connection. For duct connection see corresponding GOLD AHU size.

| Size - capacity variant | Air flow      |           | Power<br>connection | Dimensions |           |           |                | Nom. cooling<br>capacity<br>(kW) | Amount of refrigerant<br>(kg) |           |
|-------------------------|---------------|-----------|---------------------|------------|-----------|-----------|----------------|----------------------------------|-------------------------------|-----------|
|                         | m³/h          | m³/s      |                     | L<br>(mm)  | W<br>(mm) | H<br>(mm) | Weight<br>(kg) |                                  | Circuit 1                     | Circuit 2 |
| COOL DX 008 - 1         | 790 - 1980    | 0,2 - 0,6 | 3 x 400V, 16A       | 900        | 995       | 1185      | 194 - 226      | 9.8                              | 1.20                          | 1.30      |
| COOL DX 008 - 2         | 1080 - 2520   | 0,3 - 0,7 | 3 x 400V, 20A       | 900        | 995       | 1185      | 215 - 247      | 13.9                             | 1.20                          | 1.30      |
| COOL DX 012 - 1         | 1260 - 3060   | 0,4 - 0,9 | 3 x 400V, 20A       | 900        | 1199      | 1395      | 260 - 300      | 15.4                             | 1.50                          | 1.70      |
| COOL DX 012 - 2         | 1440 - 3780   | 0,4 - 1,1 | 3 x 400V, 25A       | 900        | 1199      | 1395      | 287 - 327      | 20.9                             | 1.50                          | 1.70      |
| COOL DX 020 - 1         | 1620 - 3960   | 0,5 - 1,1 | 3 x 400V, 25A       | 900        | 1400      | 1651      | 247 - 291      | 15.4                             | 1.20                          | 1.50      |
| COOL DX 020 - 2         | 1800 - 4680   | 0,5 - 1,3 | 3 x 400V, 25A       | 900        | 1400      | 1651      | 287 - 331      | 23.3                             | 2.50                          | 2.80      |
| COOL DX 020 - 3         | 2160 - 5760   | 0,6 - 1,6 | 3 x 400V, 40A       | 900        | 1400      | 1651      | 318 - 362      | 31.0                             | 2.10                          | 2.40      |
| COOL DX 030 - 1         | 2520 - 6480   | 0,7 - 1,8 | 3 x 400V, 32A       | 900        | 1600      | 1911      | 327 - 395      | 25.0                             | 1.80                          | 2.00      |
| COOL DX 030 - 2         | 2880 - 7200   | 0,8 - 2,0 | 3 x 400V, 25A       | 900        | 1600      | 1911      | 379 - 447      | 35.8                             | 3.00                          | 3.20      |
| COOL DX 030 - 3         | 3600 - 8640   | 1,0 - 2,4 | 3 x 400V, 40A       | 900        | 1600      | 1911      | 419 - 487      | 46.2                             | 2.90                          | 3.30      |
| COOL DX 040 - 1         | 3960 - 10440  | 1,1 - 2,9 | 3 x 400V, 25A       | 1100       | 1990      | 2259      | 498 - 586      | 38.6                             | 3.30                          | 4.00      |
| COOL DX 040 - 2         | 4680 - 11160  | 1,3 - 3,1 | 3 x 400V, 40A       | 1100       | 1990      | 2259      | 506 - 594      | 48.4                             | 3.30                          | 4.50      |
| COOL DX 040 - 3         | 5400 - 12960  | 1,5 - 3,6 | 3 x 400V, 50A       | 1100       | 1990      | 2259      | 559 - 647      | 67.0                             | 5.50                          | 4.50      |
| COOL DX 060 - 1         | 5400 - 14040  | 1,5 - 3,9 | 3 x 400V, 40A       | 1100       | 2318      | 2388      | 715 - 843      | 56.2                             | 4.50                          | 5.50      |
| COOL DX 060 - 2         | 5760 - 14760  | 1,6 - 4,1 | 3 x 400V, 50A       | 1100       | 2318      | 2388      | 786 - 914      | 66.7                             | 5.00                          | 5.20      |
| COOL DX 060 - 3         | 7200 - 18000  | 2,0 - 5,0 | 3 x 400V, 80A       | 1100       | 2318      | 2388      | 859 - 987      | 97.5                             | 6.00                          | 7.50      |
| COOL DX 080 - 1         | 7200 - 18720  | 2,0 - 5,2 | 3 x 400V, 50A       | 1100       | 2637      | 2740      | 852 - 1004     | 67.0                             | 6.60                          | 7.30      |
| COOL DX 080 - 2         | 8640 - 21600  | 2,4 - 6,0 | 3 x 400V, 80A       | 1100       | 2637      | 2740      | 979 - 1131     | 96.5                             | 6.50                          | 9.00      |
| COOL DX 080 - 3         | 10080 - 25200 | 2,8 - 7,0 | 3 x 400V, 100A      | 1100       | 2637      | 2740      | 1035 - 1187    | 134.0                            | 9.00                          | 11.50     |



# COOL DX Top



COOL DX Top is a chiller available for top panel connection. For duct connection see corresponding GOLD RX Top AHU size.

| Size            | GOLD RX Top<br>Size - capacity variant | Airflow   |           | Power<br>connection | Dimensions |           |           |                | Nom. cooling<br>capacity<br>(kW) | Amount of refrigerant<br>(kg) |           |
|-----------------|----------------------------------------|-----------|-----------|---------------------|------------|-----------|-----------|----------------|----------------------------------|-------------------------------|-----------|
|                 |                                        | m³/h      | m³/s      |                     | L<br>(mm)  | W<br>(mm) | H<br>(mm) | Weight<br>(kg) |                                  | Circuit 1                     | Circuit 2 |
| COOL DX Top 005 | GOLD RX Top 004-1                      | 360-1440  | 0.10-0.40 | 3x400V, 16A         | 1600       | 825       | 650       | 213            | 6.77                             | 0.95                          | 1.00      |
|                 | GOLD RX Top 005-1                      |           |           | 3x400V, 20A         |            |           |           |                |                                  |                               |           |
|                 | GOLD RX Top 005-2                      |           |           | 3x400V, 25A         |            |           |           |                |                                  |                               |           |
| COOL DX Top 008 | GOLD RX Top 007-1                      | 790-1980  | 0.22-0.55 | 3x400V, 25A         | 1720       | 995       | 650       | 269            | 9.31                             | 1.15                          | 1.20      |
|                 | GOLD RX Top 007-2                      |           |           | 3x400V, 25A         |            |           |           |                |                                  |                               |           |
|                 | GOLD RX Top 008-1                      |           |           | 3x400V, 32A         |            |           |           |                |                                  |                               |           |
|                 | GOLD RX Top 008-2                      |           |           | 3x400V, 20A         |            |           |           |                |                                  |                               |           |
| COOL DX Top 012 | GOLD RX Top 011-1                      | 1260-3060 | 0.35-0.85 | 3x400V, 32A         | 2219       | 1199      | 650       | 332            | 14.8                             | 1.60                          | 1.70      |
|                 | GOLD RX Top 011-2                      |           |           | 3x400V, 20A         |            |           |           |                |                                  |                               |           |
|                 | GOLD RX Top 012-1                      |           |           | 3x400V, 20A         |            |           |           |                |                                  |                               |           |
|                 | GOLD RX Top 012-2                      |           |           | 3x400V, 25A         |            |           |           |                |                                  |                               |           |

# GOLD/SILVER C SD



| Size | Ecodesign          |                    | Connections                |                             | Dimensions |           |      |             |      |           |                                          |                                                     |         |         |
|------|--------------------|--------------------|----------------------------|-----------------------------|------------|-----------|------|-------------|------|-----------|------------------------------------------|-----------------------------------------------------|---------|---------|
|      | Air flow<br>(m³/h) | Air flow<br>(m³/s) | Duct<br>connection<br>(mm) | Power<br>connection         | L1         |           | L2   |             | L3   |           | L4                                       |                                                     | W<br>mm | H<br>mm |
|      |                    |                    |                            |                             | mm         | kg        | mm   | kg          | mm   | kg        | mm                                       | kg                                                  |         |         |
| 004  | 290 - 1650         | 0,08 - 0,5         | Ø 315                      | 1 x 230V, 10A               | 1955       | 210 - 236 | 2364 | 232 - 258   | 1119 | 97 - 118  | 809                                      | 65 - 85                                             | 825     | 560     |
| 005  | 290 - 2000         | 0,08 - 0,6         | Ø 315                      | 1 x 230V, 10A               | 1955       | 210 - 236 | 2364 | 232 - 258   | 1119 | 97 - 118  | 809                                      | 65 - 85                                             | 825     | 560     |
| 007  | 290 - 2880         | 0,08 - 0,8         | Ø 400                      | 1 x 230V, 10A               | 2049       | 255 - 291 | 2364 | 278 - 310   | 1214 | 115 - 145 | 809                                      | 79 - 100                                            | 995     | 643     |
| 008  | 720 - 3020         | 0,2 - 0,8          | Ø 400                      | 1 x 230V, 10A <sup>1)</sup> | 2049       | 262 - 295 | 2364 | 285 - 317   | 1214 | 122 - 149 | 809                                      | 86 - 107                                            | 995     | 643     |
| 011  | 720 - 4320         | 0,2 - 1,2          | Ø 500                      | 1 x 230V, 10A <sup>1)</sup> | 2239       | 348 - 393 | 2433 | 368 - 412   | 1404 | 164 - 203 | 878                                      | 109 - 138                                           | 1199    | 748     |
| 012  | 720 - 4320         | 0,2 - 1,2          | Ø 500                      | 3 x 400V, 10A               | 2239       | 359 - 407 | 2433 | 379 - 423   | 1404 | 175 - 217 | 878                                      | 120 - 149                                           | 1199    | 748     |
| 014  | 720 - 6480         | 0,2 - 1,8          | 1000 x 400                 | 3 x 400V, 10A               | -          | -         | 2710 | 506 - 567   | -    | -         | 1040                                     | 148 - 191                                           | 1400    | 876     |
| 020  | 1080 - 7120        | 0,3 - 2,0          | 1000 x 400                 | 3 x 400V, 10A               | -          | -         | 2710 | 516 - 587   | -    | -         | 1040                                     | 158 - 211                                           | 1400    | 876     |
| 025  | 1080 - 9400        | 0,3 - 2,6          | 1200 x 500                 | 3 x 400V, 10A               | -          | -         | 2813 | 616 - 699   | -    | -         | 1144                                     | 190 - 252                                           | 1600    | 1006    |
| 030  | 1800 - 9730        | 0,5 - 2,7          | 1200 x 500                 | 3 x 400V, 10A               | -          | -         | 2813 | 659 - 728   | -    | -         | 1144                                     | 216 - 264                                           | 1600    | 1006    |
| 035  | 1800 - 14040       | 0,5 - 3,9          | 1400 x 600                 | 3 x 400V, 10A               | -          | -         | 2988 | 853 - 966   | -    | -         | 1253                                     | 263 - 332                                           | 1990    | 1180    |
| 040  | 2700 - 15837       | 0,8 - 4,4          | 1400 x 600                 | 3 x 400V, 16/20A            | -          | -         | 2988 | 878 - 1000  | -    | -         | 1253                                     | 288 - 366                                           | 1990    | 1180    |
| 050  | 2700 - 19328       | 0,8 - 5,4          | 1600 x 800                 | 3 x 400V, 16/20A            | -          | -         | 2988 | 1058 - 1190 | -    | -         | 1253                                     | 331 - 410                                           | 2318    | 1244    |
| 060  | 3600 - 20168       | 1,0 - 5,6          | 1600 x 800                 | 3 x 400V, 16/25A            | -          | -         | 2988 | 1131 - 1254 | -    | -         | 1253                                     | 404 - 474                                           | 2318    | 1244    |
| 070  | 3600 - 24394       | 1,0 - 6,8          | 1800 x 1000                | 3 x 400V, 16/25A            | -          | -         | 3447 | 1494 - 1633 | -    | -         | 1325                                     | 496 - 578                                           | 2637    | 1420    |
| 080  | 5400 - 24830       | 1,5 - 6,9          | 1800 x 1000                | 3 x 400V, 25/40A            | -          | -         | 3447 | 1521 - 1678 | -    | -         | 1325                                     | 523 - 633                                           | 2637    | 1420    |
| 100  | 5400 - 38058       | 1,5 - 10,6         | 2400 x 1200                | 3 x 400V, 25/40A            | -          | -         | 3322 | 2133 - 2372 | -    | -         | 1681 <sup>2)</sup><br>1181 <sup>3)</sup> | 861 - 937 <sup>2)</sup><br>644 - 720 <sup>3)</sup>  | 3340    | 1720    |
| 120  | 9000 - 39188       | 2,5 - 10,9         | 2400 x 1200                | 3 x 400V, 40/63A            | -          | -         | 3322 | 2233 - 2481 | -    | -         | 1681 <sup>2)</sup><br>1181 <sup>3)</sup> | 961 - 1046 <sup>2)</sup><br>744 - 829 <sup>3)</sup> | 3340    | 1720    |

1) Alt. 3 x 400V, 10A

2) GOLD 100/120


3) SILVER C 100/120

 Outdoor air  
  Supply air  
  Extract air  
  Exhaust air  
  Right version  
  Left version


Alternatives are illustrated as outlined arrows.

## GOLD/SILVER C RX


RX 004-008

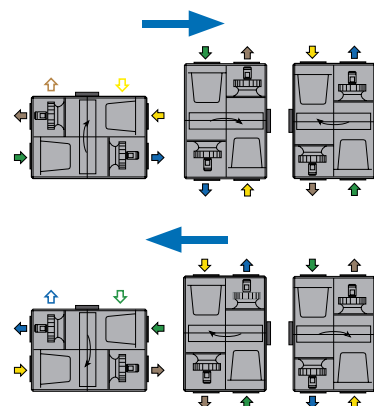


RX Top 004-012

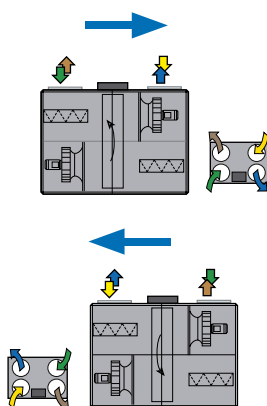


RX 004-120 (split) \*004-080

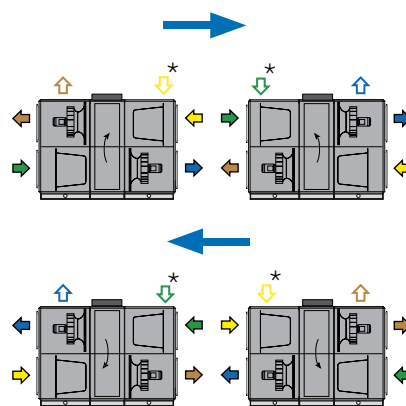

RX Top 014-030

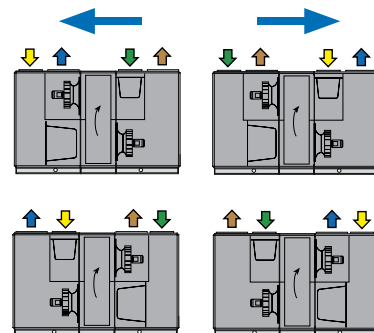


RX 014-030 Combinations

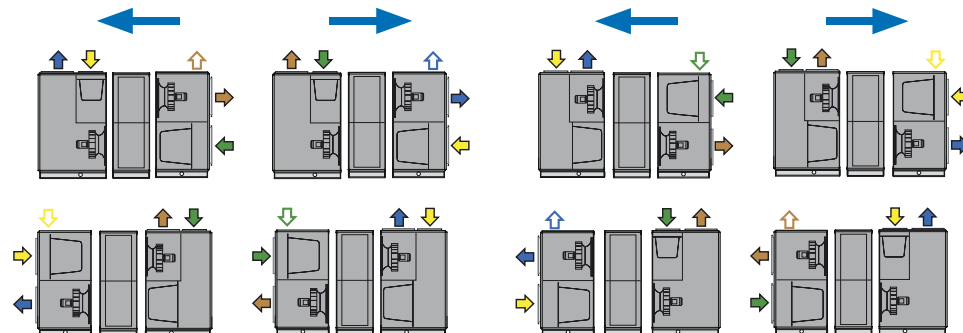


## GOLD/SILVER C PX


PX 004-040




PX Top 004-008




PX Top 011-030



PX 004-008 Combinations

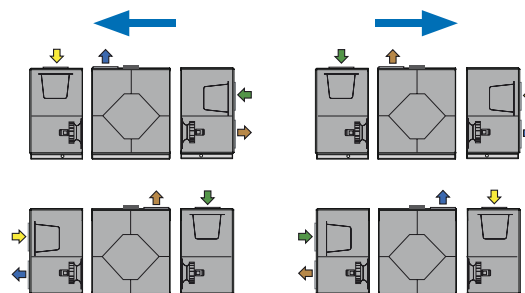

PX 011-030 Combinations

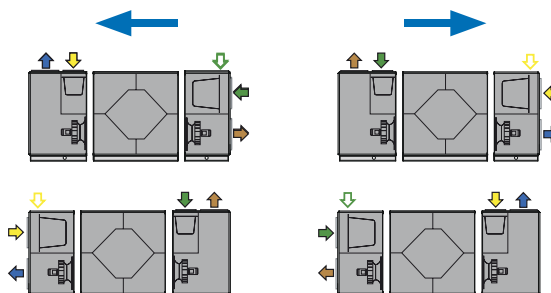


 Outdoor air   
  Supply air   
  Extract air   
  Exhaust air   
  Right version   
  Left version


Alternatives are illustrated as outlined arrows.

## GOLD/SILVER C CX

CX 035-120 \*011-080


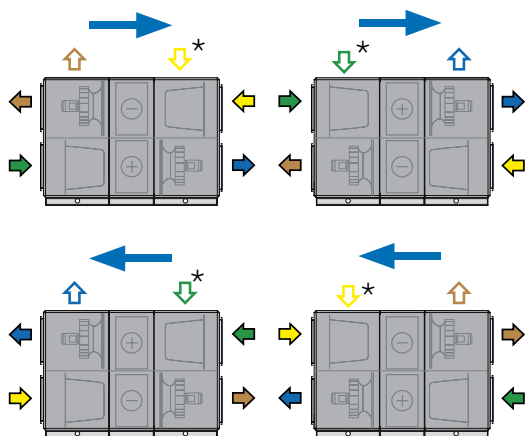


CX100-120

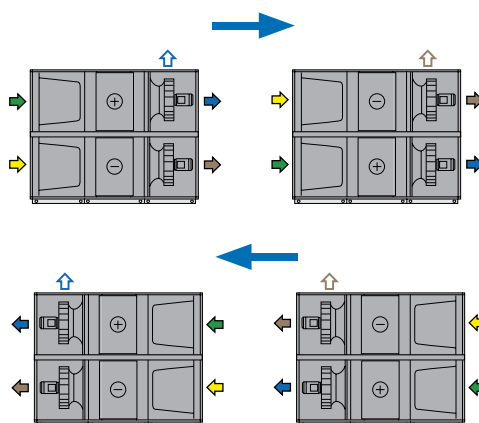


## GOLD RX/HC, GOLD RX/C

RX/HC 011-030

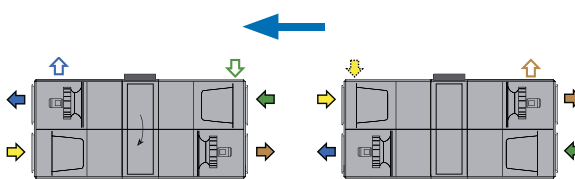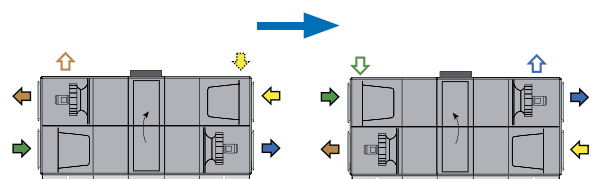


## GOLD/SILVER C SD


SD 004-008 SD

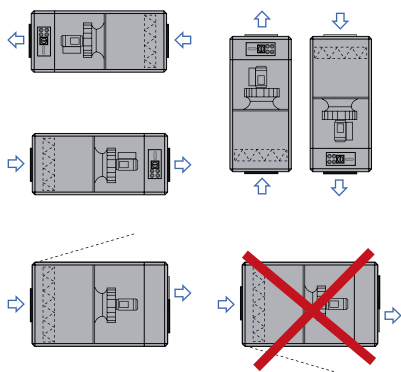

SD 011-012

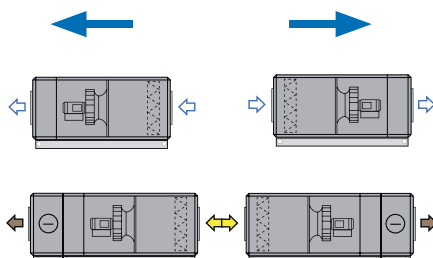


SD 004-012 (split), 014-120

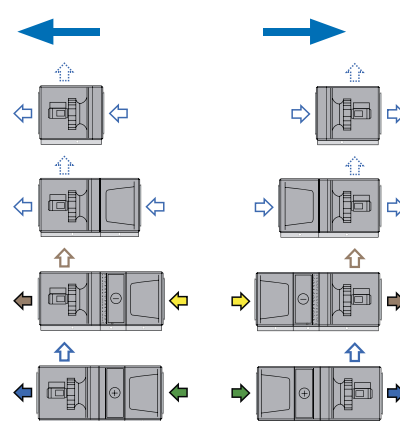

# GLOBAL RX

## GLOBAL RX Top

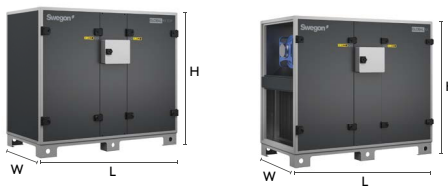

|           | Ecodesign       |                 | SFP 1,5 150 Pa      |                     | SFP 2,0 200 Pa      |                     | Connections          |                   | Dimensions |        |        |             |
|-----------|-----------------|-----------------|---------------------|---------------------|---------------------|---------------------|----------------------|-------------------|------------|--------|--------|-------------|
| Size      | Air flow (m³/h) | Air flow (m³/s) | Air flow (m³/h)     | Air flow (m³/s)     | Air flow (m³/h)     | Air flow (m³/s)     | Duct connection (mm) | Power connection  | L (mm)     | W (mm) | H (mm) | Weight (kg) |
| RX 08     | 200 - 1600      | 0,06 - 0,4      | 1330                | 0,4                 | 1600                | 0,4                 | Ø 315                | 1 x 230V/5.3A     | 1530       | 815    | 1315   | 330         |
| RX 13     | 300 - 2800      | 0,08 - 0,8      | 2670                | 0,7                 | 2800                | 0,8                 | 918 x 583            | 1 x 230V/7.5A     | 1680       | 995    | 1465   | 390         |
| RX 16     | 300 - 3200      | 0,08 - 0,9      | 3200                | 0,9                 | 3200                | 0,9                 | 1105 x 583           | 3 x 400V + N/6.3A | 1680       | 1182   | 1465   | 430         |
| RX 18     | 600 - 4500      | 0,2 - 1,3       | 4500                | 1,3                 | 4500                | 1,3                 | 1305 x 713           | 3 x 400V + N/6.7A | 1880       | 1382   | 1725   | 610         |
| RX 20     | 600 - 5400      | 0,2 - 1,5       | 5040                | 1,4                 | 5400                | 1,5                 | 1305 x 713           | 3 x 400V + N/6.5A | 1880       | 1382   | 1725   | 610         |
| RX 26     | 600 - 6900      | 0,2 - 1,9       | 6310                | 1,8                 | 6900                | 1,9                 | 1563 x 713           | 3 x 400V + N/6.7A | 1880       | 1640   | 1725   | 680         |
| RX Top 05 | 200 - 950       | 0,03 - 0,3      | 450<br>(Max 107 Pa) | 0,1<br>(Max 107 Pa) | 557<br>(Max 179 Pa) | 0,2<br>(Max 179 Pa) | Ø 250                | 1 x 230V/5.3A     | 1530       | 815    | 1315   | 340         |
| RX Top 08 | 200 - 1300      | 0,06 - 0,4      | 606<br>(Max 104 Pa) | 0,2<br>(Max 104 Pa) | 960                 | 0,3                 | Ø 250                | 1 x 230V/5.3A     | 1530       | 815    | 1315   | 340         |
| RX Top 13 | 200 - 2300      | 0,06 - 0,6      | 1300                | 0,4                 | 2020                | 0,6                 | 593 x 408            | 1 x 230V/7.7A     | 1680       | 995    | 1465   | 420         |
| RX Top 16 | 300 - 3050      | 0,08 - 0,9      | 2880                | 0,8                 | 3050                | 0,8                 | 593 x 503            | 1 x 230V/7.7A     | 1680       | 1182   | 1465   | 470         |


# GLOBAL PX LP



|          | Ecodesign       |                 | SFP 1,5 150 Pa      |                     | SFP 2,0 200 Pa  |                 | Connections                            |                                         |                  | Dimensions |        |        |             |
|----------|-----------------|-----------------|---------------------|---------------------|-----------------|-----------------|----------------------------------------|-----------------------------------------|------------------|------------|--------|--------|-------------|
| Size     | Air flow (m³/h) | Air flow (m³/s) | Air flow (m³/h)     | Air flow (m³/s)     | Air flow (m³/h) | Air flow (m³/s) | Duct connection (mm)<br>Supply Exhaust | Duct connection (mm)<br>Extract Outdoor | Power connection | L (mm)     | W (mm) | H (mm) | Weight (kg) |
| PX LP 02 | 100-550         | 0,03 - 0,2      | 460                 | 0,1                 | 550             | 0,2             | Ø 200                                  | Ø 200                                   | 1 x 230V/3.1A    | 1300       | 890    | 350    | 100         |
| PX LP 04 | 100-650         | 0,03 - 0,2      | 610                 | 0,2                 | 650             | 0,2             | Ø 250                                  | Ø 250                                   | 1 x 230V/3.1A    | 1300       | 1100   | 350    | 125         |
| PX LP 06 | 200 - 100       | 0,06 - 0,3      | 516<br>(Max 144 Pa) | 0,1<br>(Max 144 Pa) | 850             | 0,2             | Ø 315                                  | Ø 315                                   | 1 x 230V/5.3A    | 2100       | 1050   | 435    | 180         |
| PX LP 08 | 200-1400        | 0,06 - 0,4      | 1050                | 0,3                 | 1340            | 0,4             | Ø 315                                  | Ø 315                                   | 1 x 230V/5.3A    | 2100       | 1050   | 435    | 210         |
| PX LP 10 | 250-1750        | 0,07 - 0,5      | 1420                | 0,4                 | 1750            | 0,5             | 400 x 300                              | 800 x 300                               | 1 x 230V/4.9A    | 2100       | 1600   | 435    | 250         |
| PX LP 12 | 300-2100        | 0,08 - 0,6      | 2100                | 0,6                 | 2100            | 0,6             | 400 x 300                              | 800 x 400                               | 1 x 230V/7.7A    | 2250       | 1700   | 510    | 300         |
| PX LP 13 | 300-2550        | 0,08 - 0,7      | 2080                | 0,6                 | 2530            | 0,7             | 500 x 400                              | 800 x 400                               | 1 x 230V/7.7A    | 2250       | 1700   | 510    | 300         |
| PX LP 14 | 300-2850        | 0,08 - 0,8      | 2390                | 0,7                 | 2550            | 0,8             | 500 x 400                              | 1000 x 400                              | 1 x 230V/7.7A    | 2250       | 1940   | 510    | 350         |
| PX LP 16 | 400-3300        | 0,1 - 0,9       | 2780                | 0,8                 | 3300            | 0,9             | 700 x 500                              | 700 x 500                               | 1 x 230V/12.7A   | 2900       | 1935   | 660    | 500         |
| PX LP 18 | 400-3500        | 0,1 - 1,0       | 2820                | 0,8                 | 3500            | 1,0             | 700 x 500                              | 700 x 500                               | 1 x 230V/12.7A   | 2900       | 1935   | 660    | 500         |


# GLOBAL PX

## GLOBAL PX Top

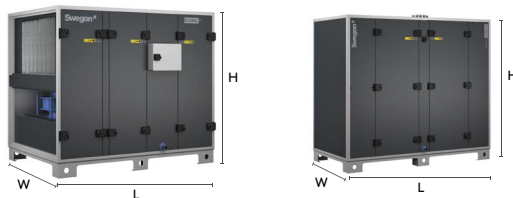

|           | Ecodesign       |                 | SFP 1,5 150 Pa      |                     | SFP 2,0 200 Pa  |                 | Connections          |                   | Dimensions |        |        |             |
|-----------|-----------------|-----------------|---------------------|---------------------|-----------------|-----------------|----------------------|-------------------|------------|--------|--------|-------------|
| Size      | Air flow (m³/h) | Air flow (m³/s) | Air flow (m³/h)     | Air flow (m³/s)     | Air flow (m³/h) | Air flow (m³/s) | Duct connection (mm) | Power connection  | L (mm)     | W (mm) | H (mm) | Weight (kg) |
| PX 04     | 200 - 800       | 0,06 - 0,22     | 410                 | 0,1                 | 800             | 0,2             | Ø 315                | 1 x 230V/5.3A     | 1680       | 610    | 1465   | 330         |
| PX 05     | 200 - 1000      | 0,06 - 0,3      | 540                 | 0,2                 | 860             | 0,2             | Ø 315                | 1 x 230V/5.3A     | 1680       | 610    | 1465   | 330         |
| PX 06     | 200 - 1400      | 0,06 - 0,4      | 1200                | 0,3                 | 1400            | 0,4             | Ø 400                | 1 x 230V/5.3A     | 1680       | 815    | 1465   | 390         |
| PX 08     | 200 - 1600      | 0,06 - 0,4      | 1200                | 0,3                 | 1520            | 0,4             | Ø 400                | 1 x 230V/5.3A     | 1680       | 815    | 1465   | 400         |
| PX 12     | 400 - 2300      | 0,1 - 0,6       | 2220                | 0,6                 | 2300            | 0,6             | 1069 x 547           | 1 x 230V/7.7A     | 1680       | 1182   | 1465   | 450         |
| PX 13     | 400 - 2650      | 0,11 - 0,7      | 2210                | 0,6                 | 2650            | 0,7             | 1069 x 547           | 1 x 230V/7.7A     | 1680       | 1182   | 1465   | 450         |
| PX 16     | 300 - 3250      | 0,08 - 0,8      | 3070                | 0,9                 | 3250            | 0,9             | 1105 x 583           | 1 x 230V/7.7A     | 1680       | 1640   | 1465   | 610         |
| PX 18     | 400 - 4000      | 0,1 - 1,1       | 3340                | 0,9                 | 4000            | 1,1             | 1938 x 583           | 1 x 230V/12.7A    | 1880       | 2015   | 1465   | 670         |
| PX 20     | 600 - 4600      | 0,2 - 1,28      | 4000                | 1,1                 | 4600            | 1,3             | 1563 x 713           | 1 x 230V/12.7A    | 2557       | 1640   | 1825   | 920         |
| PX 24     | 600 - 5900      | 0,2 - 1,6       | 5410                | 1,5                 | 5900            | 1,6             | 1938 x 713           | 3 x 400V + N/6.5A | 2557       | 2015   | 1825   | 1110        |
| PX 26     | 600 - 6800      | 0,2 - 1,9       | 6280                | 1,7                 | 6800            | 1,9             | 2318 x 713           | 3 x 400V + N/6.5A | 2557       | 2396   | 1825   | 1250        |
| PX Top 05 | 200 - 950       | 0,06 - 0,3      | 421<br>(Max 146 Pa) | 0,1<br>(Max 146 Pa) | 710             | 0,2             | Ø 250                | 1 x 230V/5.3A     | 1680       | 610    | 1625   | 340         |
| PX Top 08 | 200 - 1500      | 0,06 - 0,4      | 1020                | 0,3                 | 1320            | 0,4             | Ø 315                | 1 x 230V/5.3A     | 1680       | 815    | 1625   | 400         |
| PX Top 10 | 300 - 1850      | 0,08 - 0,5      | 1320                | 0,4                 | 1630            | 0,5             | Ø 315                | 1 x 230V/7.7A     | 1960       | 815    | 1725   | 500         |
| PX Top 12 | 300 - 2450      | 0,08 - 0,7      | 2000                | 0,6                 | 2450            | 0,7             | 500 x 300            | 1 x 230V/7.7A     | 1960       | 995    | 1725   | 560         |
| PX Top 14 | 300 - 2800      | 0,08 - 0,8      | 2580                | 0,7                 | 2800            | 0,8             | 600 x 300            | 1 x 230V/7.7A     | 1960       | 1182   | 1725   | 620         |
| PX Top 18 | 400 - 3600      | 0,1 - 1,00      | 2930                | 0,8                 | 3600            | 1,0             | 800 x 300            | 1 x 230V/12.7A    | 1960       | 1382   | 1725   | 710         |

# GLOBAL SD




|       | Max air flow    |                 | Connections          |                  | Dimensions |        |        |             |
|-------|-----------------|-----------------|----------------------|------------------|------------|--------|--------|-------------|
| Size  | Air flow (m³/h) | Air flow (m³/s) | Duct connection (mm) | Power connection | L (mm)     | W (mm) | H (mm) | Weight (kg) |
| SD U2 | 300 - 2900      | 0,08-0,8        | Ø355                 | 1 x 230V/4A      | 890        | 530    | 530    | 47          |
| SD U3 | 500 - 3800      | 0,1-1,1         | Ø400                 | 1 x 230V/10A     | 890        | 630    | 630    | 59          |
| SD U4 | 600 - 4400      | 0,2-1,2         | Ø500                 | 1 x 230V/10A     | 890        | 890    | 890    | 84          |
| SD M4 | 600 - 4400      | 0,2-1,2         | Ø500                 | 1 x 230V/10A     | 890        | 890    | 630    | 71          |
| SD M8 | 1200 - 8800     | 0,3-2,4         | 2 x Ø500             | 1 x 230V/20A     | 890        | 1430   | 630    | 113         |
| SD P2 | 500 - 3600      | 0,1-1,0         | 2 x Ø 315            | 1 x 230V/10A     | 890        | 890    | 430    | 68          |

 Outdoor air  
  Supply air  
  Extract air  
  Exhaust air  
  Right version  
  Left version


## GLOBAL RX

RX 08 - 26

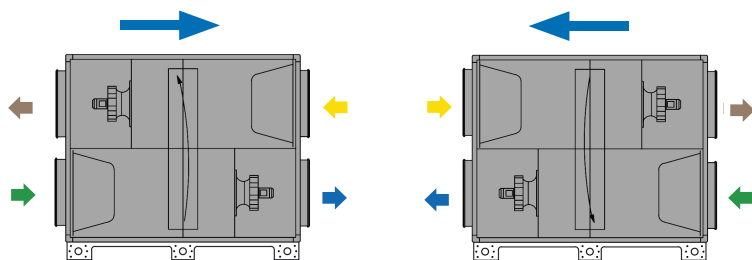


## GLOBAL RX Top

RX Top 05 - 16

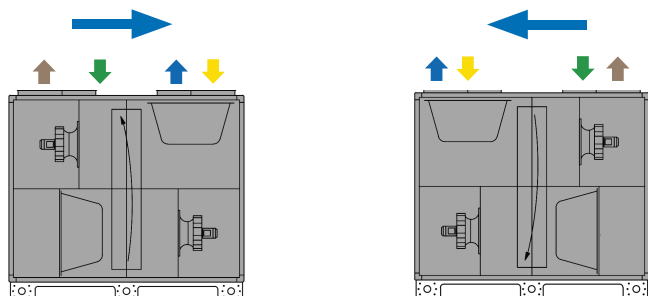


## GLOBAL PX

PX 04 - 26

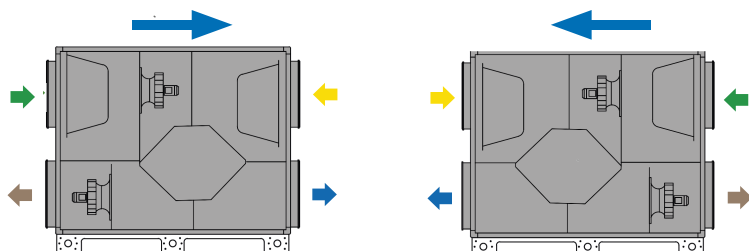


## GLOBAL PX Top

PX Top 05 - 18

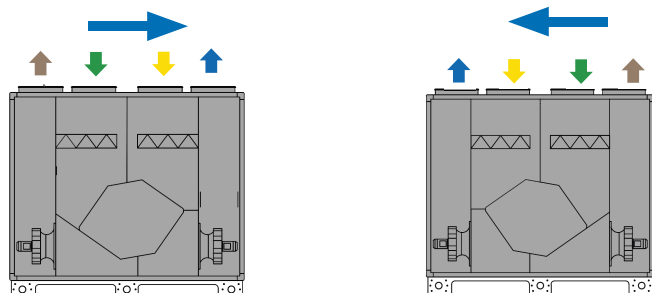


## GLOBAL PX LP


PX LP 02 - 10, 14 - 18  
(top view)

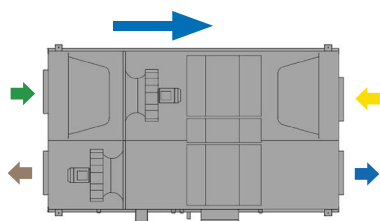


PX LP 02 - 18  
(top view)

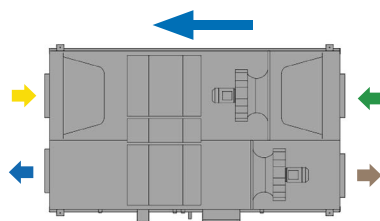

## GLOBAL SD

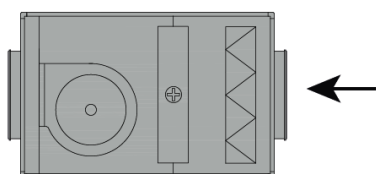

# ESENSA PX Top




|           | Ecodesign       |                 | SFP 1,5 150 Pa  |                 | SFP 2,0 200 Pa  |                 | Connections          |                  | Dimensions |        |        |             |
|-----------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|----------------------|------------------|------------|--------|--------|-------------|
| Size      | Air flow (m³/h) | Air flow (m³/s) | Air flow (m³/h) | Air flow (m³/s) | Air flow (m³/h) | Air flow (m³/s) | Duct connection (mm) | Power connection | L (mm)     | W (mm) | H (mm) | Weight (kg) |
| PX Top 05 | 250 - 900       | 0,07 - 0,3      | 440             | 0,1             | 840             | 0,2             | Ø315                 | 1 x 230V/5.5A    | 1400       | 760    | 1500   | 245         |
| PX Top 09 | 300 - 1660      | 0,08 - 0,5      | 1160            | 0,3             | 1560            | 0,4             | Ø355                 | 1 x 230V/5.1A    | 1640       | 885    | 1550   | 315         |
| PX Top 12 | 300 - 2100      | 0,08 - 0,6      | 1370            | 0,4             | 1950            | 0,5             | 600 x 300            | 1 x 230V/7.7A    | 1640       | 1105   | 1550   | 340         |
| PX Top 13 | 350 - 2680      | 0,1 - 0,7       | 1960            | 0,5             | 2570            | 0,7             | 800 x 300            | 1 x 230V/7.7A    | 1640       | 1330   | 1550   | 395         |

# ESENSA RX Top



|           | Ecodesign       |                 | SFP 1,5 150 Pa  |                 | SFP 2,0 200 Pa  |                 | Connections          |                  | Dimensions |        |        |             |
|-----------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|----------------------|------------------|------------|--------|--------|-------------|
| Size      | Air flow (m³/h) | Air flow (m³/s) | Air flow (m³/h) | Air flow (m³/s) | Air flow (m³/h) | Air flow (m³/s) | Duct connection (mm) | Power connection | L (mm)     | W (mm) | H (mm) | Weight (kg) |
| RX Top 04 | 100 - 660       | 0,03 - 0,2      | 660             | 0,183           | 660             | 0,2             | Ø250                 | 1 x 230V/3.8A    | 1280       | 725    | 1290   | 190         |
| RX Top 05 | 200 - 1200      | 0,06 - 0,3      | 840             | 0,233           | 1200            | 0,3             | Ø315                 | 1 x 230V/5.8A    | 1580       | 725    | 1290   | 225         |
| RX Top 12 | 300 - 2200      | 0,08 - 0,6      | 1800            | 0,5             | 2200            | 0,6             | 500 x 300            | 1 x 230V/7.7A    | 1680       | 925    | 1490   | 320         |
| RX Top 16 | 400 - 3250      | 0,1 - 0,9       | 2660            | 0,739           | 3350            | 0,9             | 700 x300             | 1 x 230V/7.7A    | 1680       | 1145   | 1590   | 368         |

# ESENSA PX Flex

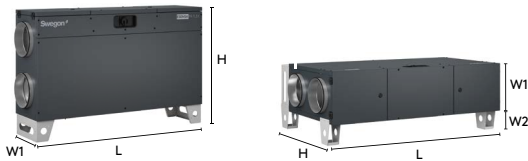


|                            | Ecodesign       |                 | SFP 1,5 150 Pa  |                 | SFP 2,0 200 Pa  |                 | Connections          |                  | Dimensions (vertical) |        |        |             | Dimensions (horizontal) |         |         |        |                           |
|----------------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|----------------------|------------------|-----------------------|--------|--------|-------------|-------------------------|---------|---------|--------|---------------------------|
| Size                       | Air flow (m³/h) | Air flow (m³/s) | Air flow (m³/h) | Air flow (m³/s) | Air flow (m³/h) | Air flow (m³/s) | Duct connection (mm) | Power connection | L (mm)                | W (mm) | H (mm) | Weight (kg) | L (mm)                  | W1 (mm) | W2 (mm) | H (mm) | Weight <sup>2)</sup> (kg) |
| PX FLEX 05 R <sup>1)</sup> | 200 - 1200      | 0,06 - 0,3      | 830             | 0,2             | 1090            | 0,3             | Ø355                 | 1 x 230V/4,9A    | 2000                  | 495    | 1250   | 215         | 2000                    | 495     | 150     | 1250   | 215                       |
| PX FLEX 10 R <sup>1)</sup> | 300 - 1970      | 0,08 - 0,5      | 1460            | 0,4             | 1840            | 0,5             | Ø500                 | 1 x 230V/6,9A    | 2150                  | 635    | 1450   | 290         | 2150                    | 635     | 150     | 1450   | 290                       |
| PX FLEX 13 R <sup>1)</sup> | 400 - 2770      | 0,1 - 0,8       | 1970            | 0,5             | 2570            | 0,7             | Ø500                 | 3 x 400V/4A      | 2150                  | 635    | 1870   | 360         | 2150                    | 635     | 150     | 1870   | 360                       |
| PX FLEX 20 R <sup>1)</sup> | 800 - 4630      | 0,2 - 1,3       | 3870            | 1,1             | 4630            | 1,3             | 500x700              | 3 x 400V/6A      | 2800                  | 960    | 2105   | 680         | 2800                    | 960     | 150     | 2005   | 700                       |


<sup>1)</sup> Data refers to Right version. Also Left version available with minor differences in performance.  
<sup>2)</sup> Feet included

 Outdoor air  
  Supply air  
  Extract air  
  Exhaust air  
  Right version  
  Left version

## ESENSA PX Top

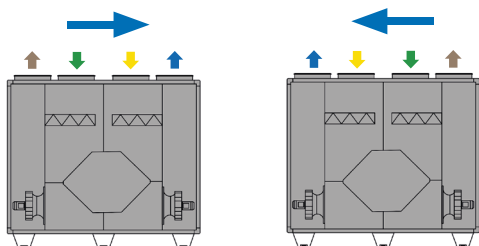


## ESENSA RX Top

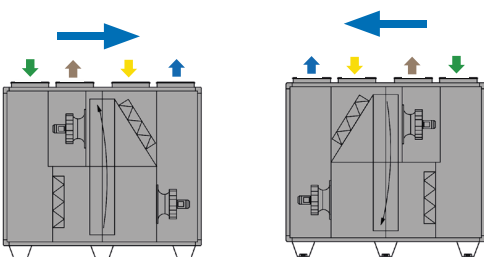


## ESENSA PX Flex

Position horizontal




Position horizontal

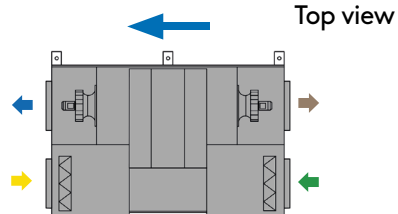


Top view

Position vertical



Position vertical




Front view

# MURAL




|            | Ecodesign       |                 | Connections          |                  | Dimensions |        |        |             |
|------------|-----------------|-----------------|----------------------|------------------|------------|--------|--------|-------------|
| Size       | Air flow (m³/h) | Air flow (m³/s) | Duct connection (mm) | Power connection | W (mm)     | L (mm) | H (mm) | Weight (kg) |
| 450 FW     | 50 - 450        | 0,01 - 0,1      | Ø 200                | 1 x 230V/2.9A    | 712        | 500    | 500    | 70          |
| 450 FW Top | 50 - 450        | 0,01 - 0,1      | Ø 200                | 1 x 230V/2.9A    | 784        | 500    | 675    | 78          |
| 600 FW     | 100 - 600       | 0,03 - 0,2      | Ø 250                | 1 x 230V/3.1A    | 860        | 500    | 860    | 109         |
| 800 FW     | 100 - 800       | 0,03 - 0,2      | Ø 315                | 1 x 230V/5.3A    | 860        | 500    | 960    | 126         |
| 1000 FW    | 100 - 1000      | 0,03 - 0,3      | Ø 355                | 1 x 230V/5.8A    | 1000       | 860    | 860    | 177         |

# COMPACT Air



|        | Ecodesign       |                 | Max./ SFPv /Pa |             | Connections          |                  | Dimensions |        |        |             |
|--------|-----------------|-----------------|----------------|-------------|----------------------|------------------|------------|--------|--------|-------------|
| Size   | Air flow (m³/h) | Air flow (m³/s) | m³/h           | m³/s        | Duct connection (mm) | Power connection | W (mm)     | L (mm) | H (mm) | Weight (kg) |
| Air 02 | 290 - 830       | 0,08 - 0,2      | 830/1.0/20     | 0,25/1.0/20 | Ø 250                | 1 x 230V, 10A    | 792        | 1102   | 2114   | 338         |
| Air 03 | 290 - 1200      | 0,08 - 0,3      | 1300/1.7/20    | 0,40/1.7/20 | Ø 250                | 1 x 230V, 10A    | 792        | 1102   | 2114   | 338         |

# CLASS UNIT PX/PX Top




|                            | Ecodesign       |                 | Connections          |                  | Dimensions |        |        |             |
|----------------------------|-----------------|-----------------|----------------------|------------------|------------|--------|--------|-------------|
| Size                       | Air flow (m³/h) | Air flow (m³/s) | Duct connection (mm) | Power connection | L (mm)     | W (mm) | H (mm) | Weight (kg) |
| PX 1000                    | 400 - 1000      | 0,1 - 0,3       | 315                  | 1 x 230V/6.5A    | 2050       | 980    | 460    | 220         |
| PX Top 1000                | 400 - 1000      | 0,1 - 0,3       | 315                  | 1 x 230V/6.5A    | 2050       | 1380   | 460    | 270         |
| PX IFP 1000 semi-integraed | 400 - 1000      | 0,1 - 0,3       | 315                  | 1 x 230V/6.5A    | 2050       | 1380   | 460    | 275         |


 Outdoor air  
  Supply air  
  Extract air  
  Exhaust air  
  Right version  
  Left version

## MURAL

450-1200 FW

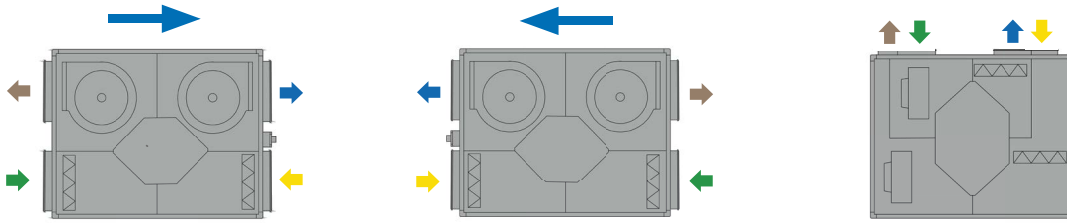


## COMPACT Air

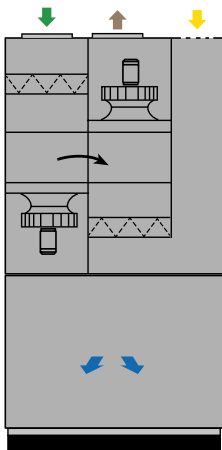


## CLASS UNIT


PX 1000



PX Top 1000



PX IFP 1000



# CASA W



|       | Ecodesign       |                 |                   | Connections          |                  | Dimensions |        |        |             |
|-------|-----------------|-----------------|-------------------|----------------------|------------------|------------|--------|--------|-------------|
| Size  | Air flow (m³/h) | Air flow (m³/s) | Sound power level | Duct connection (mm) | Power connection | L (mm)     | W (mm) | H (mm) | Weight (kg) |
| W3 xs | 36 - 288        | 0,01 - 0,08     | 39 dB             | Ø 125 mm             | 230 V/10 A       | 599        | 597    | 446    | 45          |
| W4 xs | 36 - 349        | 0,01 - 0,1      | 41 dB             | Ø 160 mm             | 230 V/10 A       | 599        | 597    | 446    | 45          |
| W5    | 108 - 468       | 0,03 - 0,1      | 41 dB             | Ø 160 mm             | 230 V/10 A       | 630        | 597    | 951    | 85          |
| W9    | 180 - 857       | 0,05 - 0,2      | 49 dB             | Ø 160 mm             | 230 V/16 A       | 594        | 1000   | 1312   | 155         |

# CASA R




|       | Ecodesign       |                 |                   | Connections          |                  | Dimensions |        |        |             |
|-------|-----------------|-----------------|-------------------|----------------------|------------------|------------|--------|--------|-------------|
| Size  | Air flow (m³/h) | Air flow (m³/s) | Sound power level | Duct connection (mm) | Power connection | L (mm)     | W (mm) | H (mm) | Weight (kg) |
| R2    | 65 - 216        | 0,02 - 0,06     | 39                | Ø 125 mm             | 230 V/10 A       | 315        | 598    | 700    | 45          |
| R3    | 90 - 295        | 0,03 - 0,08     | 39                | Ø 125 mm             | 230 V/10 A       | 361        | 599    | 700    | 50          |
| R4-C  | 72 - 331        | 0,02 - 0,09     | 39                | Ø 160 mm             | 230 V/10 A       | 700        | 1050   | 296    | 70          |
| R5    | 126 - 421       | 0,04 - 0,1      | 37                | Ø 160 mm             | 230 V/10 A       | 600        | 598    | 597    | 78          |
| R5-H  | 108 - 439       | 0,03 - 0,1      | 38                | Ø 160 mm             | 230 V/10 A       | 479        | 702    | 614    | 55          |
| R7    | 216 - 677       | 0,06 - 0,2      | 46                | Ø 200 mm             | 230 V/10 A       | 571        | 855    | 1104   | 80          |
| R7-H  | 216 - 749       | 0,06 - 0,2      | 43                | Ø 200 mm             | 230 V/10 A       | 571        | 930    | 715    | 80          |
| R9    | 270 - 871       | 0,08 - 0,2      | 43                | Ø 250 mm             | 230 V/10 A       | 788        | 1080   | 1372   | 168         |
| R9-H  | 270 - 997       | 0,08 - 0,3      | 41                | Ø 315 mm             | 230 V/10 A       | 790        | 1100   | 1040   | 155         |
| R15   | 360 - 1710      | 0,1 - 0,5       | NRVU*             | Ø 250 mm             | 230 V/10 A       | 788        | 1080   | 1372   | 173         |
| R15-H | 360 - 1980      | 0,1 - 0,6       | NRVU*             | Ø 315 mm             | 230 V/10 A       | 790        | 1100   | 1040   | 160         |

\* Defined as non-residential ventilation unit according to Ecodesign Lot 6

 Outdoor air  
  Supply air  
  Extract air  
  Exhaust air  
  Right version  
  Left version


CASA W3 xs

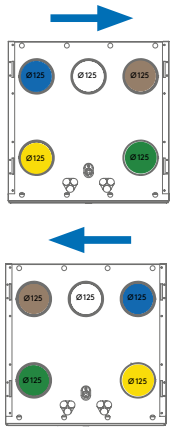


CASA W4 xs




CASA W5

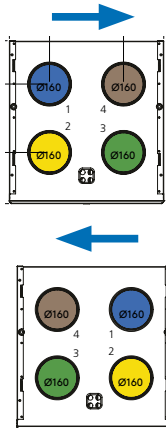


CASA W9

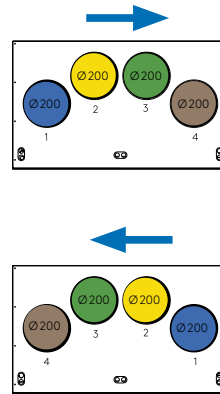


CASA R2




CASA R3




CASA R4-C




CASA R5




CASA R5-H

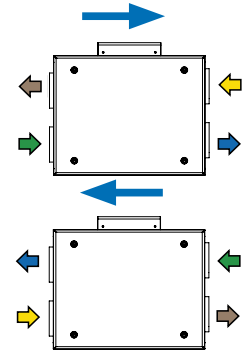


CASA R7




CASA R7-H

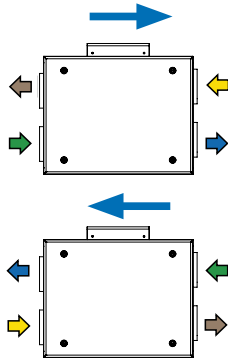


CASA R9




CASA R9-H

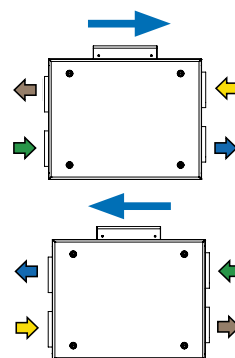

CASA R15



CASA R15-H

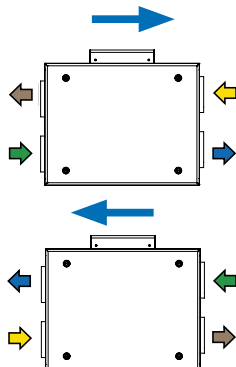

# Feel good **inside**

