

# ROT<sub>a</sub>

Installation – Commissioning – Maintenance

20180213

## Accessories

### Wall sleeve:

VGR: Rectangular telescopic wall sleeve made of galvanized sheet steel.

## Installation

Cut opening according to dimension C x D in the Dimensions and Weights table. Secure the grilles directly against the wall surface, centred over the opening. If a VGR wall sleeve is used, it can be attached to the wall structure. Separate the two telescopic halves of the wall sleeve and insert each half into either side of the wall opening to fit the wall thickness. See Figure 1.

## Maintenance

The transfer unit can be cleaned, if necessary, using lukewarm water with dishwashing detergent added or by vacuum cleaning using a brush nozzle.

## Dimensions and weights

Size	A	B	C	D	E	Weight, kg
300	416	160	300	50	80-150	1,9
500	592	160	500	50	80-150	2,6
700	800	160	700	50	80-150	3,5
850	960	160	850	50	80-150	4,1

Size of the opening VGR =  $(C + 5 \text{ mm}) \times (D + 5 \text{ mm})$

The weight excluding the VGR.

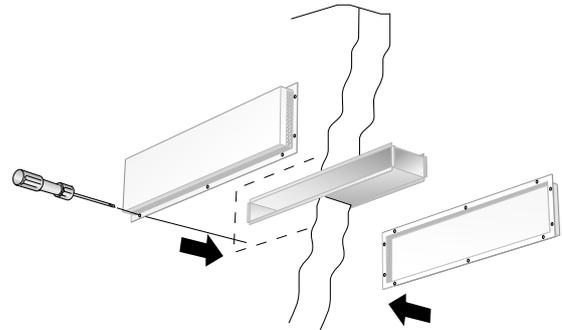


Figure 1. ROT, installation.

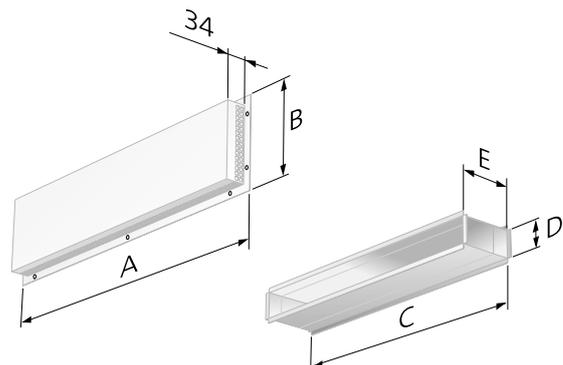


Figure 2. ROT, dimensions.