


GOLD PX 04-07 eff.var. 1 och 2/cap.var. 1 and 2, 08 eff.var./cap.var. 1, avfrost. sekv./defr. seq.

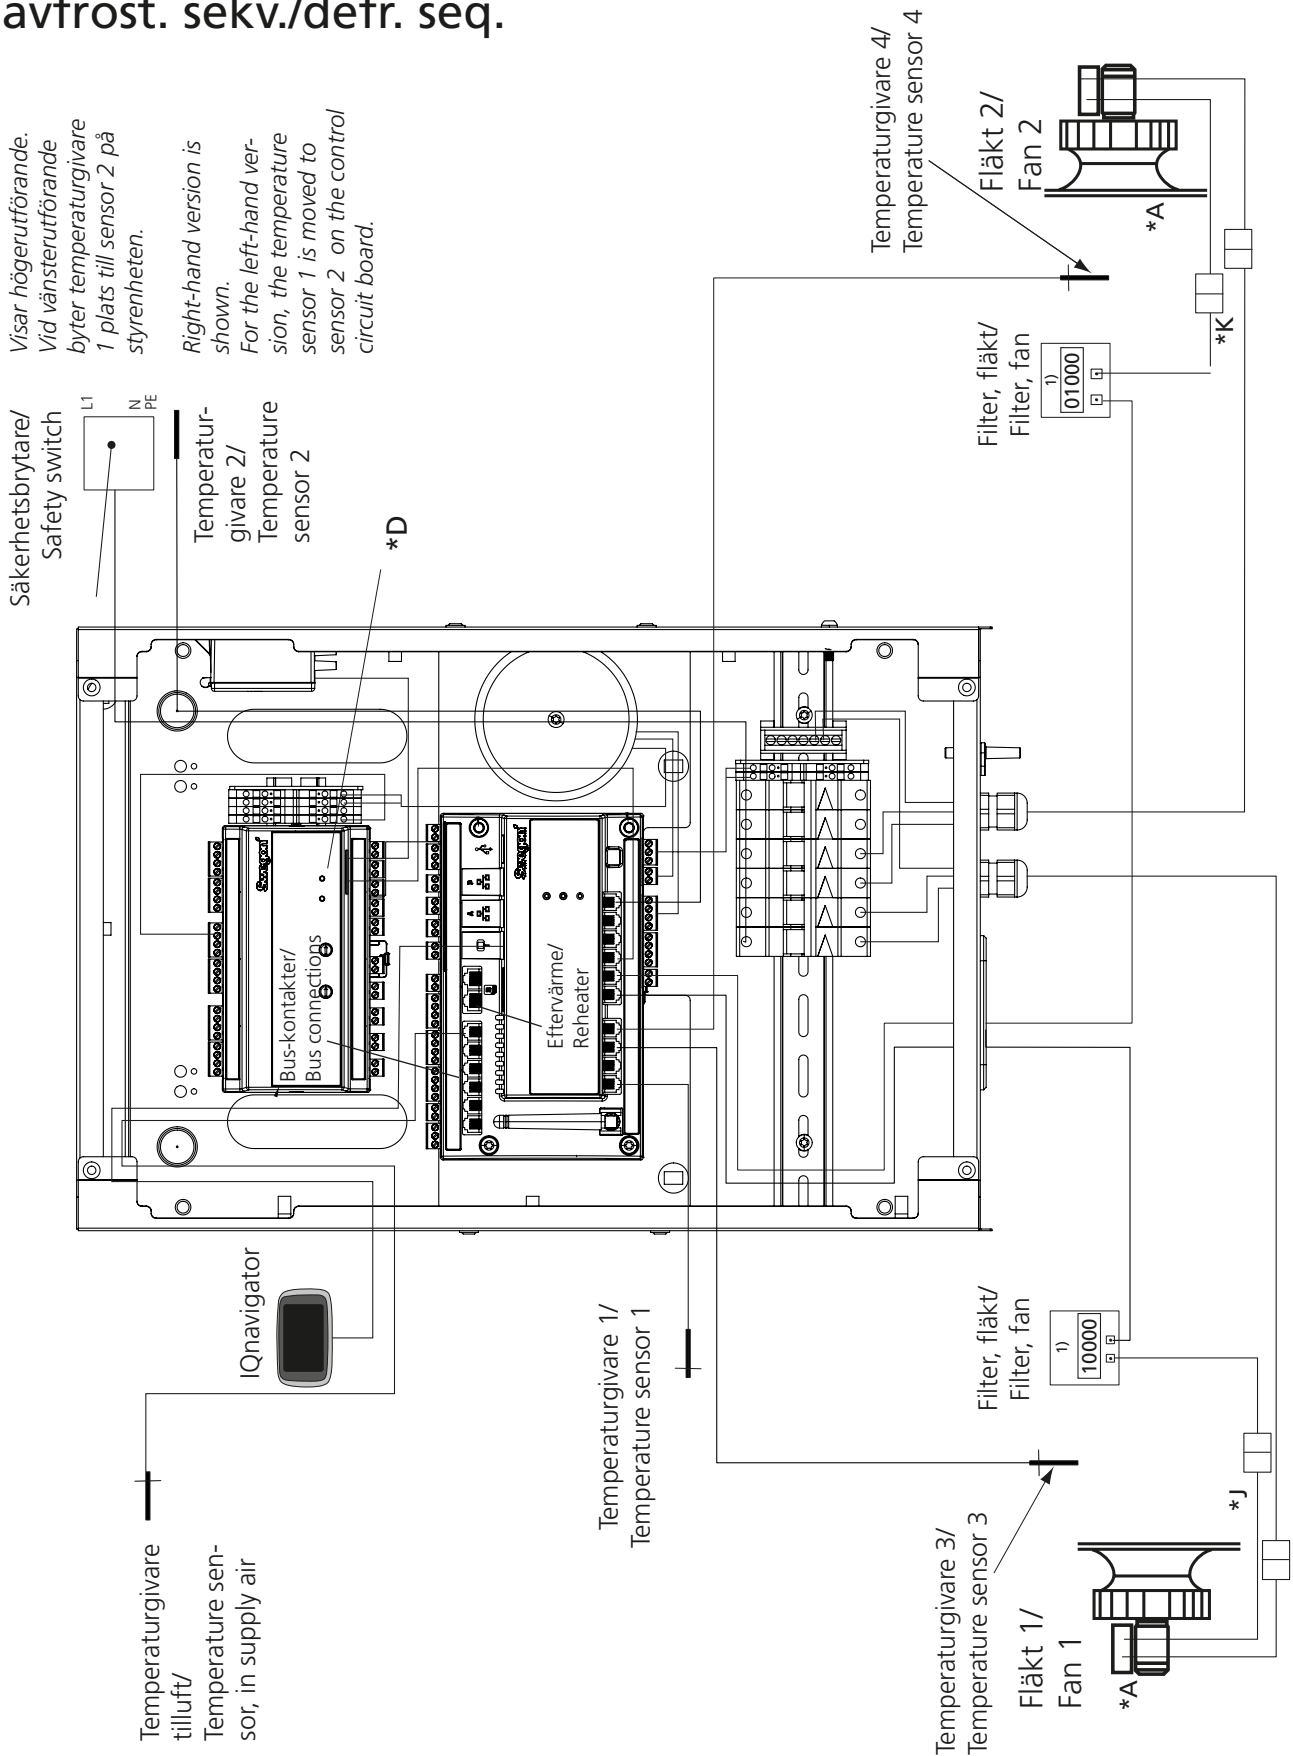


1) Inställning DIP-switch. Switch nr. 1-5. 1 = On, 0 = Off./
Settings DIP switch. Switch no. 1-5. 1 = On, 0 = Off.

Visar högerutförande.
Vid vänsterutförande byter temperaturgivare 1 plats till sensor 2 på styrenheten.


*Right-hand version is shown.
For the left-hand version, the temperature sensor 1 is moved to sensor 2 on the control circuit board.*




A: GOLD RX/PX/CX/SD 04-07, 08/11 eff.var./cap.var. 1

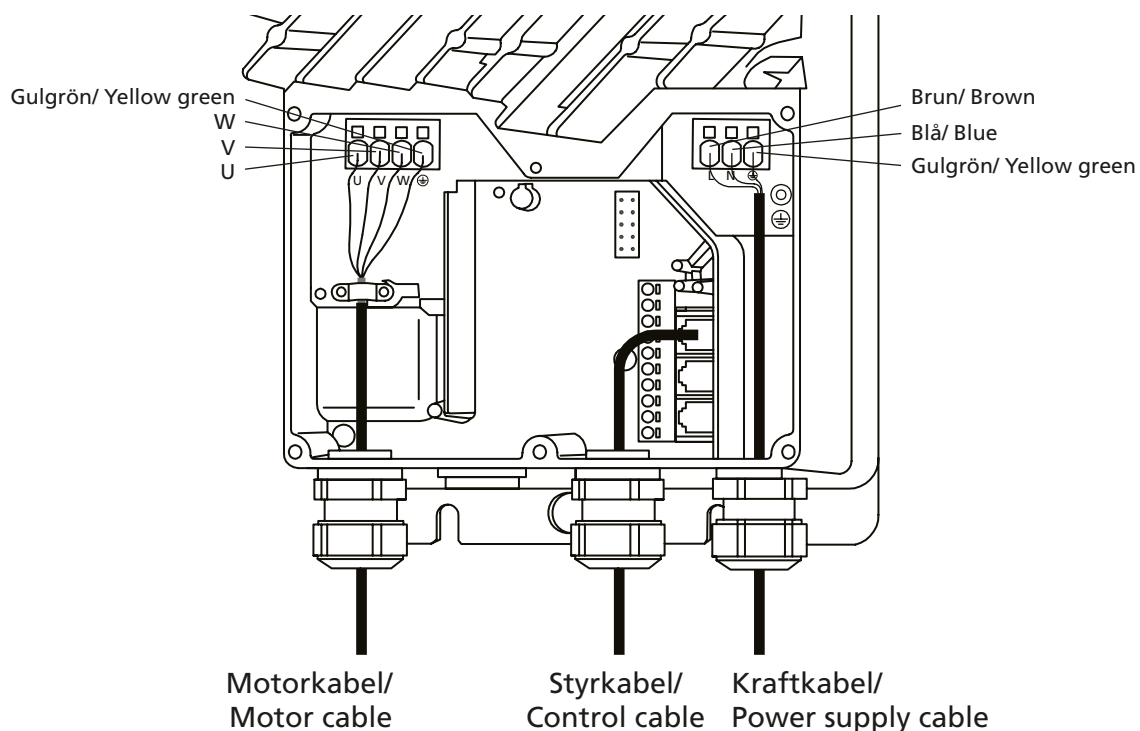


A: GOLD RX/PX/CX/SD08/11 eff.var./cap.var. 2, 12-120

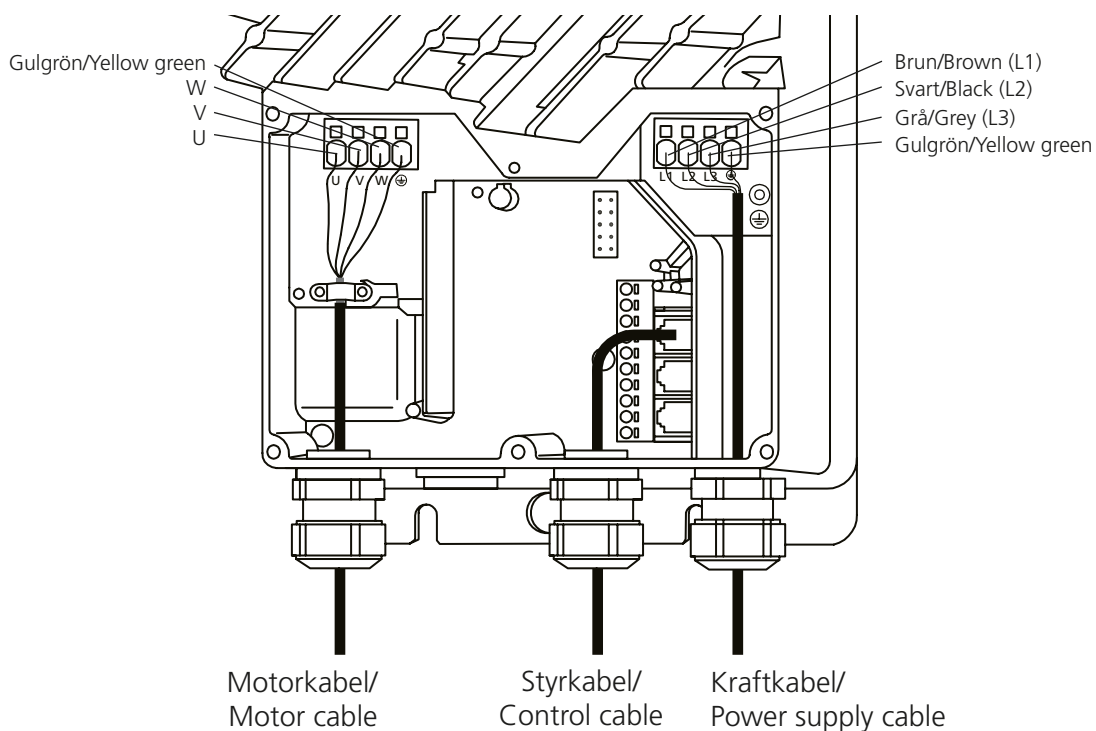

D: GOLD PX 04-40

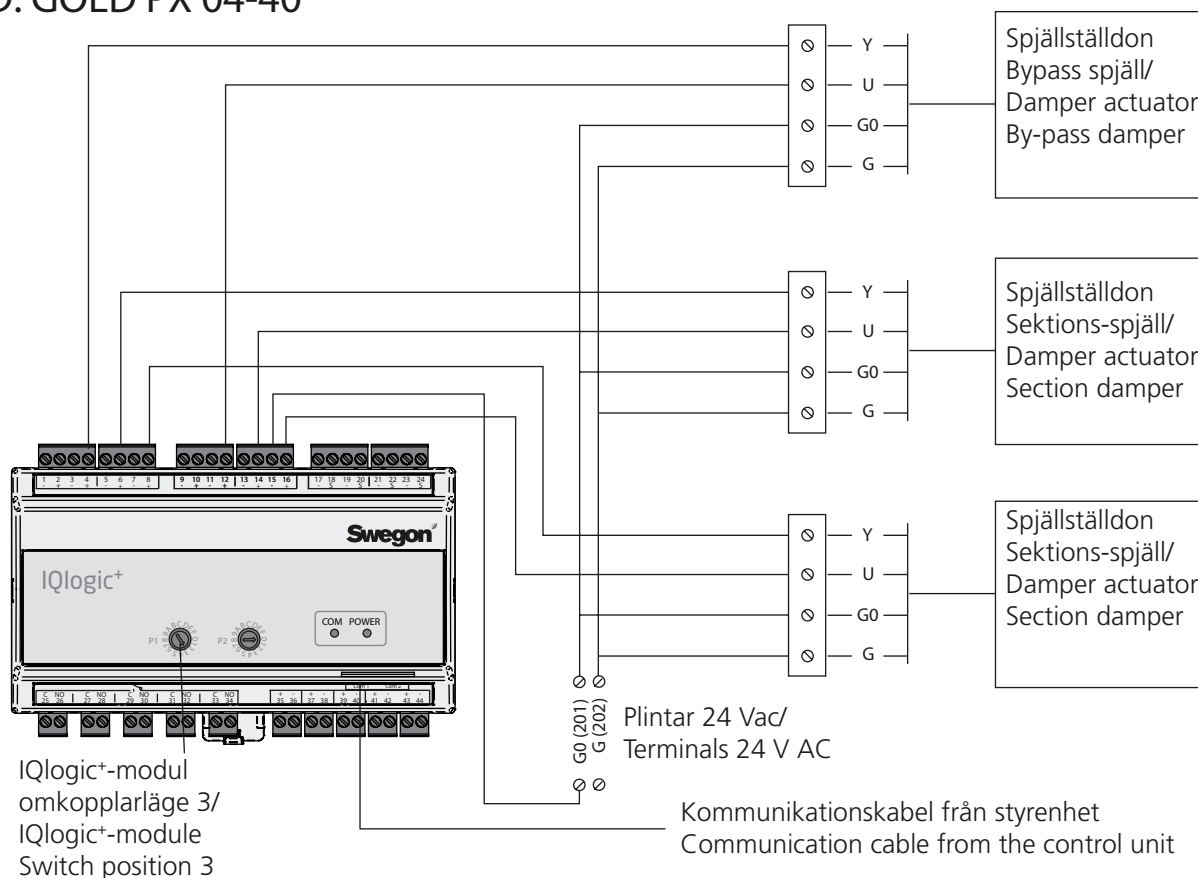

J: GOLD RX/PX/CX/SD 04-50

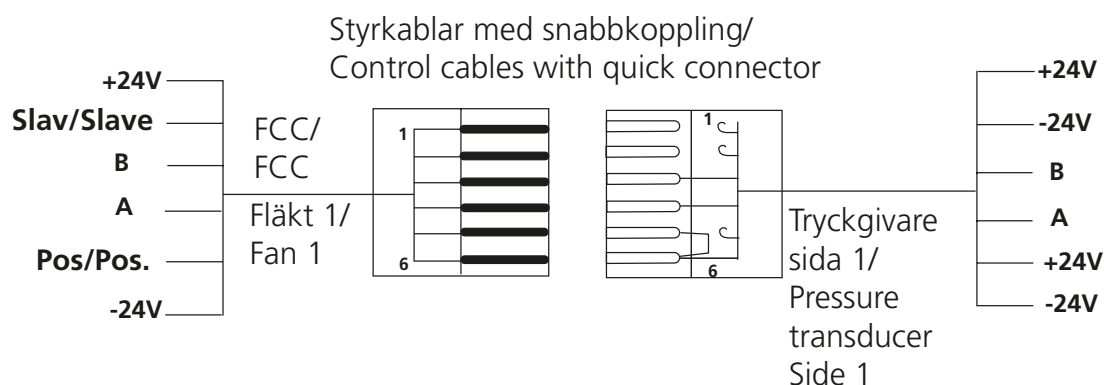

K: GOLD RX/PX/CX/SD 04-50

