


GOLD PX+ 40 eff.var. 1 och 2/cap.var. 1 and 2, avfrost. sekv./defr. seq.


Visar högerutförande.
Vid vänsterutförande byter temperaturgivare 1 plats till sensor 2 på styrenheten.

Right-hand version is shown.
For the left-hand version, the temperature sensor 1 is moved to sensor 2 on the control circuit board.

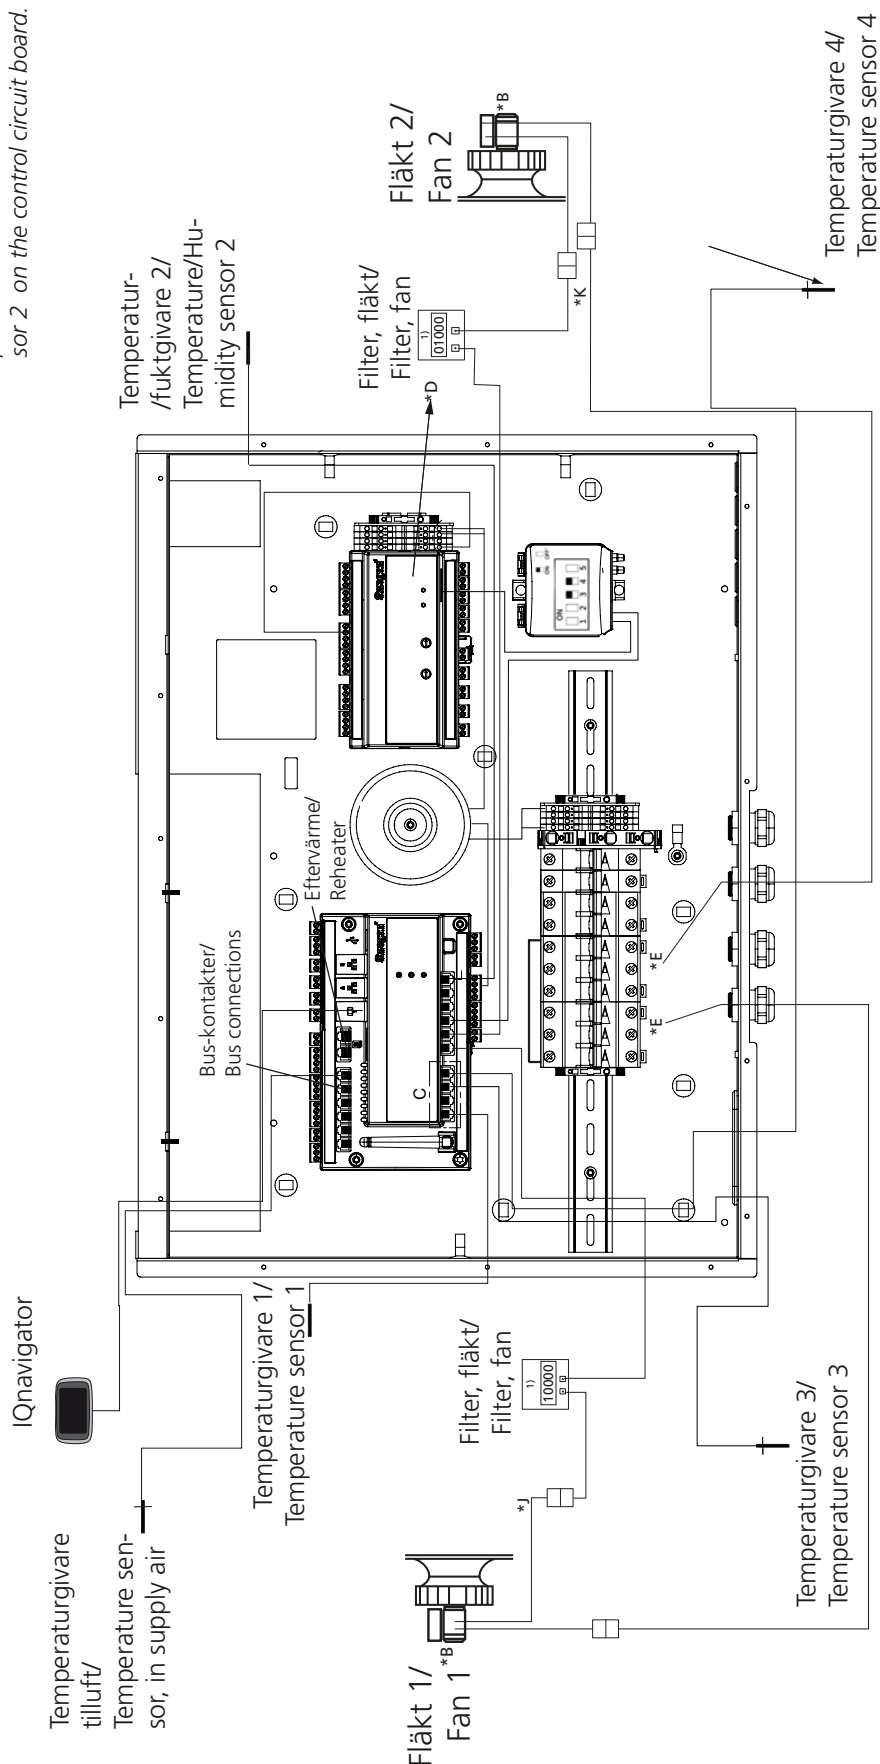


1) Inställning DIP-switch. Switch nr. 1-5. 1 = On, 0 = Off.
Settings DIP switch. Switch no. 1-5. 1 = On, 0 = Off.


A: Alt. 1: GOLD RX/PX/CX/SD14-120

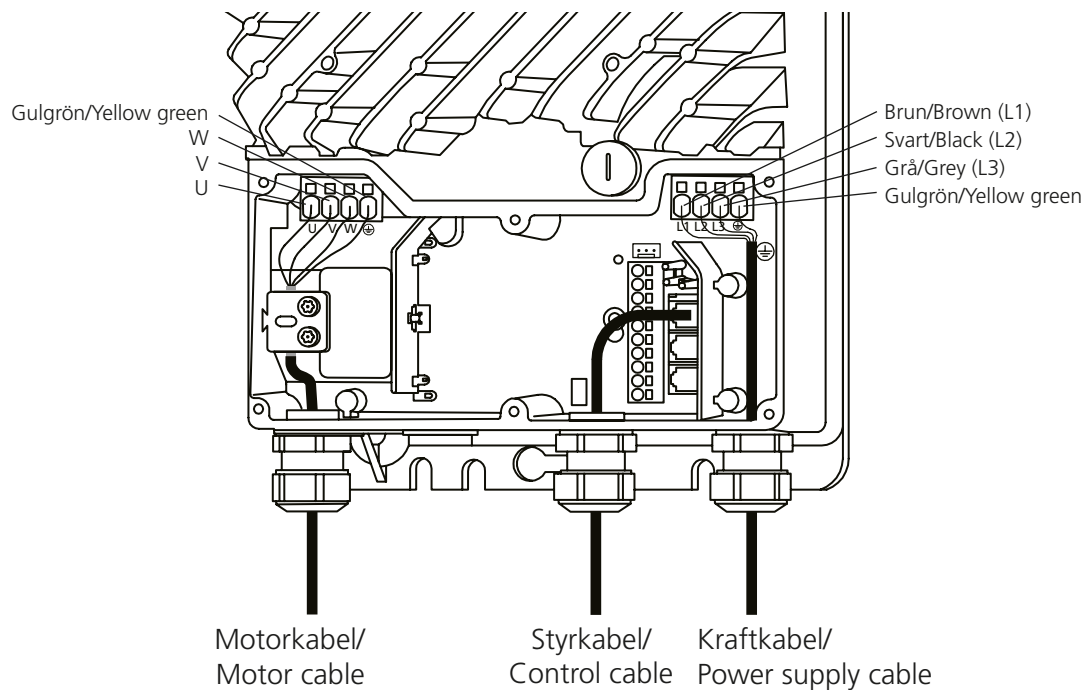

Alt. 2: GOLD RX/PX/CX/SD14-120

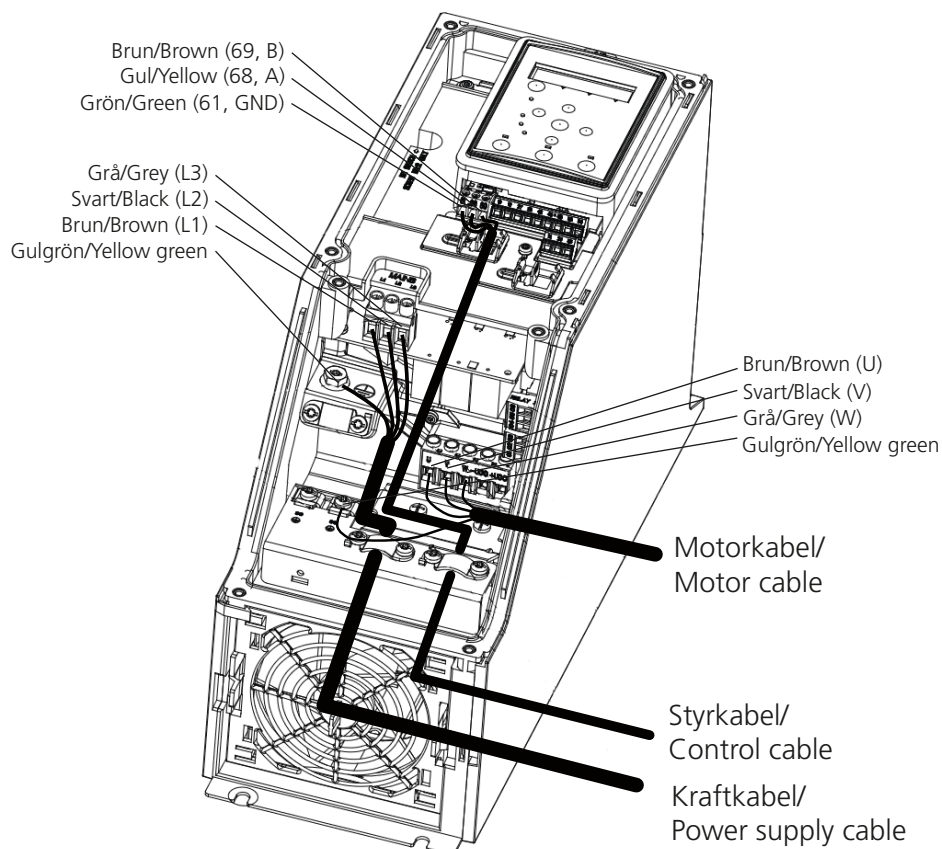


D: GOLD PX+

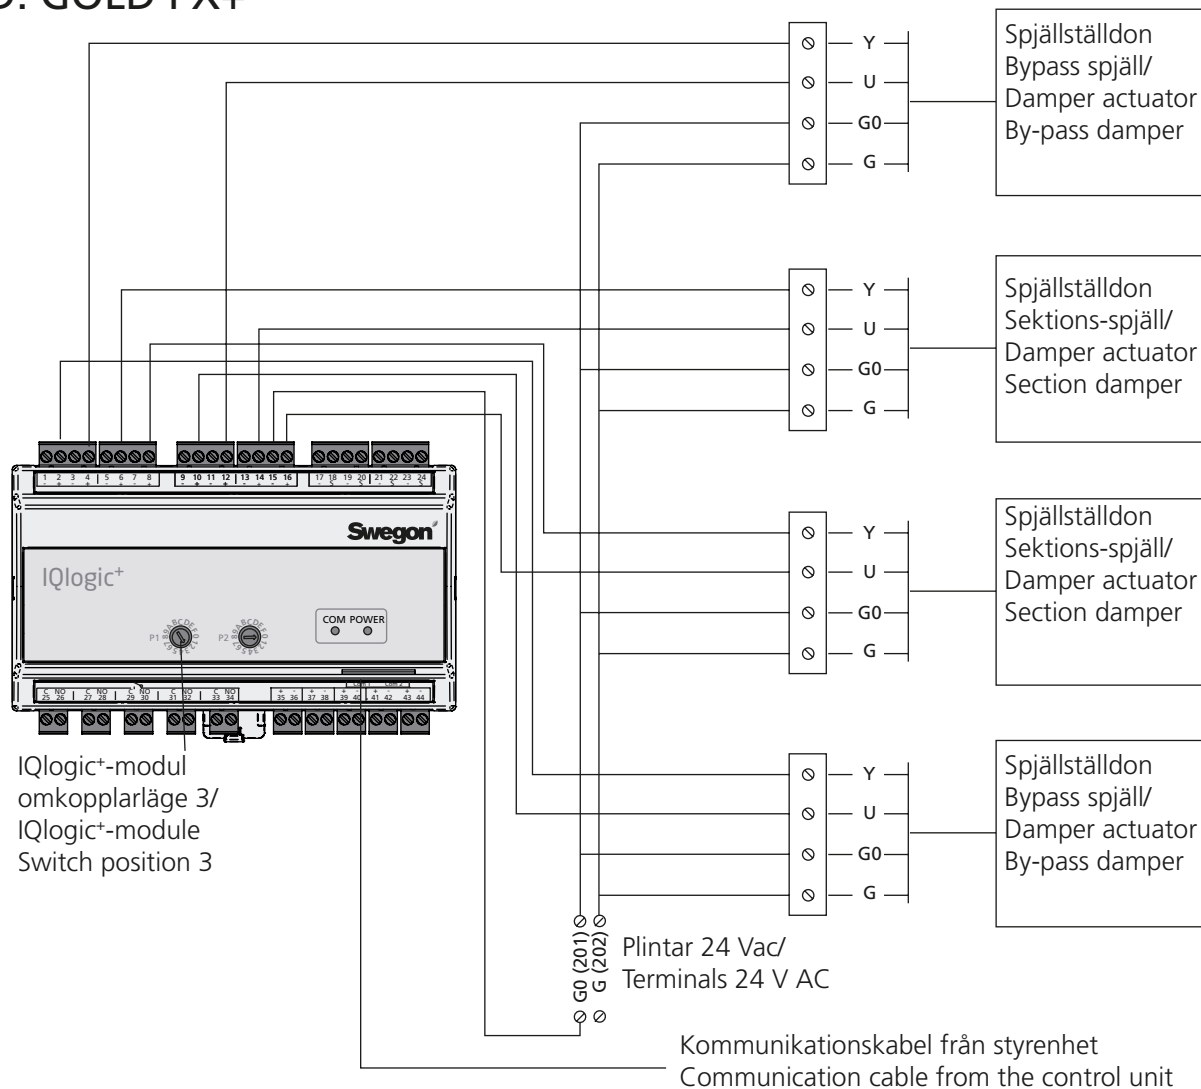


E: GOLD RX 50

Inkoppling av kraftkablar på säkringar för fläktstyrning/
Wiring of power supply cables to fuses for fan controls

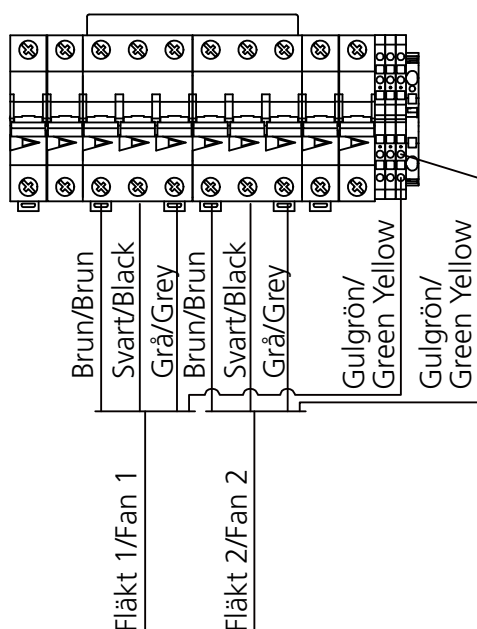

J: GOLD RX/PX/CX/SD 04-50

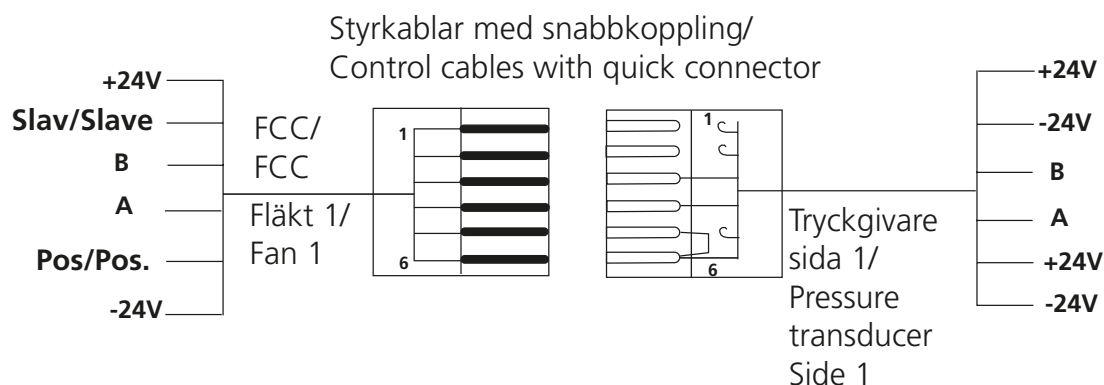

K: GOLD RX/PX/CX/SD 04-50

