


CU2

Rectangular fire damper in fire-resistance class EI60S to EI120S for installation in wall, floor and remote wall



QUICK FACTS

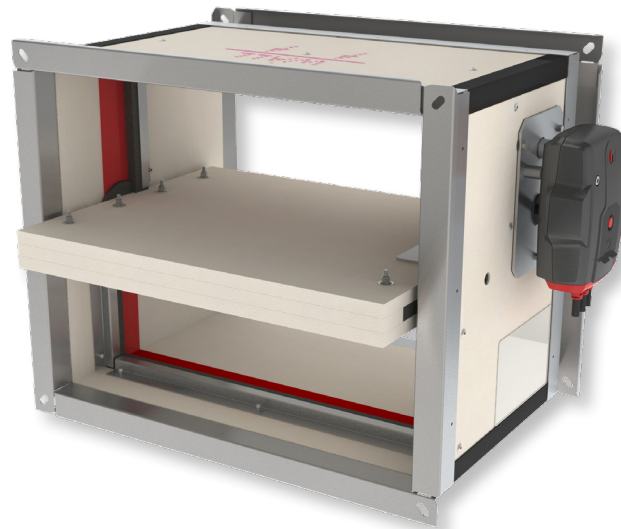







- CU2 is a fire damper in fire-resistance class EI60S to EI120S, with rectangular PG20 connection up to 1500×1000 mm.
- EI60S – EI120S provides resistance against fire and smoke for 60 to 120 minutes depending on installation, with increased sealing (S) against cold smoke, see Declaration of Performance (DoP).
- For wall/floor with various motor position in all four angles and approved for minimal distance installation.
- Unique tests for installation in sandwich walls (Paroc) and shaft walls, see Declaration of Performance (DoP).
- The casing is made of fire proof material and has leakage class B according to EN 1751
- CE approved according to product standard EN 15650
- Can be controlled with Swegon's control and monitoring products

Table of content

Declaration of performance	4
Product presentation CU2	5
Range and dimensions CU2	6
Variant CU2L	6
Range and dimensions CU2L	6
Variant CU2-L500	7
Range and dimensions CU2-L500	7
Variant CU2 ATEX	7
Range and dimensions CU2 ATEX	8
Variant CU2L ATEX	8
Range and dimensions CU2L ATEX	8
Evolution - kits	9
Options - at the time of order	13
Flange types - at the time of order	14
Storage and handling	15
Installation	15
Installation at a minimal distance from another damper or from an adjacent supporting construction	16
Installation in rigid wall and floor	17
Installation in flexible wall (metal stud gypsum plasterboard wall)	19
Installation in flexible wall (metal stud gypsum plasterboard wall), sealing with gypsum	22
Installation in flexible wall (metal stud gypsum plasterboard wall), sealing with mortar	24
Installation in gypsum block wall	26
Installation in flexible and rigid wall, sealing with rigid stone wool boards with coating	28
Installation remote from the wall, sealing and insulation with rigid stone wool boards with coating	31
Installation in rigid floor, sealing with rigid stone wool boards with coating	34
Installation in shaft wall	36
Operation and mechanisms	37
Electrical connection	44
Weights	46
Selection data	62
Example	62
Sample order	75
Approvals and certificates	75

Explanation of the abbreviations and pictograms

Wn = nominal width	E.TELE = power supply magnet	Sn = free air passage
Hn = nominal height	E.ALIM = power supply motor	ζ [-] = pressure loss coefficient
Dn = nominal diameter	V = volt	Q = airflow
E = integrity	W = watt	ΔP = static pressure drop
I = thermal insulation	Auto = automatic	v = air speed in the duct
S = smoke leakage: max. 200 m ³ /(h m ²) according to EN 1366-2	Tele = remote controlled	Lwa = A-weighted sound power level
Pa = pascal	Pnom = nominal capacity	Lw oct = sound power level per octave midband
ve = vertical wall penetration	Pmax = maximum capacity	dB(A) = A-weighted decibel value
ho = horizontal floor penetration	GKB (type A) / GKF (type F): "GKB" stands for standard plasterboards (type A according to EN 520) while "GKF" plasterboards offer a higher fire resistance for a similar plate thickness (type F according to EN 520)	ΔL = correction factor
o -> i = meets the criteria from the outside (o) to the inside (i)	Cal-Sil = calcium silicate	
i <-> o = fire side not important	OP = option (delivered with the product)	
V AC = Volt alternating current	KIT = kit (delivered separately for repair or upgrade)	
V DC = Volt direct current	PG = connection flange to the duct	

	large dimensions		air tightness in accordance with EN 1751: class ATC 4 (formerly B), class ATC 3 in option (formerly C)
	Hygiene certificate (www.HYG.de)		suitable for built-in installation
	intermediate dimensions on request		minimal distance allowed
	sealing with fire resistant stone wool boards allowed, also for asymmetric opening		ATEX certificate TÜV 14 ATEX 7540 X

DECLARATION OF PERFORMANCE

CE_DoP_Rf-t_C2_EN - N-01/05/2025

1. Unique identification code of the product-type:	CUZ
2. Intended use/s:	Rectangular fire damper to be used in conjunction with partitions to maintain fire compartments in heating, ventilating and air conditioning installations.
3. Manufacturer:	Rf-Technologies NV, Lange Ambachtstraat 40, B-9860 Oosterzele
4. System/s of AVCP:	System 1
5. Harmonised standard / European Assessment Document; notified body / European Technical Assessment, Technical Assessment Body, notified body; certificate of constancy of performance:	EN 15650:2010, BCCA with identification number 0749; 0749-CPR-BC1-606-0464-15650-03-0464&2517
6. Declared performance according to EN 15650:2010	(Fire resistance according to EN 1366-2 and classifications according to EN 13501-3)

Essential characteristics		Sealing		Installation		Performance	
Range	Type	Construction	Sealing	Installation	Classification	Harmonised standard EN 15650:2010	
200x200 mm ≤ CUZ ≤ 1500x1000 mm	Rigid wall	Aerated concrete ≥ 100 mm	Gypsum Mortar	1	EI 120 (V _e , I ↔ o) S - (500 Pa)		
	Flexible wall	Metal studs gypsum plasterboard Type A (EN 520) ≥ 100 mm	Galvanised duct + stone wool + coating ≥ 150 kg/m ² 2x50 mm Gypsum Mortar	2	EI 90 (V _e , I ↔ o) S - (300 Pa)		
		Metal studs gypsum plasterboard Type F (EN 520) ≥ 100 mm	Galvanised duct + stone wool + coating ≥ 150 kg/m ² 2x50 mm Gypsum	1	EI 60 (V _e , I ↔ o) S - (300 Pa)		
		Paroc System Panel Sandwich panel type Paroc AST S ≥ 100 mm Gypsum blocks ≥ 100 mm	Galvanised duct + stone wool + coating ≥ 150 kg/m ² 2x50 mm Mortar	2	EI 90 (V _e , I ↔ o) S - (300 Pa)		
	Rigid floor	Aerated concrete ≥ 150 mm	Block glue	1	EI 120 (V _e , I ↔ o) S - (500 Pa)		
	Rigid wall	Aerated concrete ≥ 100 mm	Mortar	3	EI 120 (V _e , I ↔ o) S - (500 Pa)		
200x200 mm ≤ CUZ ≤ 1200x800 mm			Mortar	3	EI 120 (V _e , I ↔ o) S - (500 Pa)		
	Flexible wall	Metal studs gypsum plasterboard Type A (EN 520) ≥ 100 mm	Stone wool + coating ≥ 140 kg/m ² Stone wool ≥ 40 kg/m ² + cover plates	1	EI 60 (V _e , I ↔ o) S - (500 Pa)		
		Metal studs gypsum plasterboard Type F (EN 520) ≥ 100 mm	Stone wool + coating ≥ 140 kg/m ² Stone wool ≥ 40 kg/m ² + cover plates	3	EI 90 (V _e , I ↔ o) S - (500 Pa)		
		Gypsum blocks ≥ 70 mm	Stone wool + coating ≥ 140 kg/m ² Block glue	1	EI 90 (V _e , I ↔ o) S - (300 Pa)		
	Rigid floor	Aerated concrete ≥ 150 mm	Stone wool + coating ≥ 140 kg/m ² Mortar / gypsum	3	EI 90 (V _e , I ↔ o) S - (300 Pa)		
1200x800 mm < CUZ ≤ 1500x1000 mm				3	EI 60 (V _e , I ↔ o) S - (500 Pa)		
	Rigid wall	Aerated concrete ≥ 100 mm	Mortar	3	EI 90 (V _e , I ↔ o) S - (300 Pa)		
	Flexible wall	Metal studs gypsum plasterboard Type F (EN 520) ≥ 100 mm	Stone wool ≥ 40 kg/m ² + cover plates	1	EI 90 (V _e , I ↔ o) S - (300 Pa)		
200x200 mm ≤ CUZ ≤ 1500x800 mm	Asymmetrical flexible wall (shaft wall)	Metal studs gypsum plasterboard Type F (EN 520) ≥ 82.5 mm	Stone wool ≥ 40 kg/m ² + cover plates	4	EI 60 (V _e , I ↔ o) S - (300 Pa)		
	Rigid floor	Aerated concrete ≥ 125 mm	Mortar	3	EI 120 (V _e , I ↔ o) S - (300 Pa)		
1	Type of installation: built-in 0/180°; Minimal distances authorised.	2		3	Type of installation: built-in 0/90/180/270°; Minimal distances authorised.		
4	Type of installation: built-in 0/180°						

Nominal activation conditions/sensitivity:	Pass
Response delay (response time): closure time	Pass
Operational reliability: cycling	CFTH - 50 cycles; MANO - 300 cycles; BUL(F)T - 10000 cycles; BFL(T) - 10000 cycles; BFN(T) - 10000 cycles; ONE - 10000 cycles; UNIQ - 10000 cycles; BORI - 300 cycles
Durability of response delay:	Pass
Durability of operational reliability:	Pass
Protection against corrosion according to EN 60068-2-52:	Pass
Damper casing leakage according to EN 1751:	≥ class ATC 4 (formerly B)

The performance of the product, identified above is in conformity with the set of declared performance/s. This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011, under the sole responsibility of the manufacturer identified above.



Product presentation CU2

Rectangular fire damper for large dimensions up to 1500 x 1000 mm. The tunnel is made of fireproof moisture-resistant and asbestos-free boards. Fire resistance of up to 120 minutes and numerous options make the CU2 fire damper a universal reference on the market. For maximum dimensions up to 3050 x 1650 mm, please refer to the CE marked battery assembly CU2/B.


Fire dampers are installed where air ducts penetrate fire-resistant compartment walls. Their role is to restore the fire resistance grade of the penetrated wall and to prevent smoke propagation. Fire dampers are distinguished by their degree of fire resistance, by their aerodynamic properties as well as by their installation ease. Rf-Technologies' fire dampers are all CE marked. They can be equipped with various types of mechanisms depending on the specific needs linked to the project or to the local regulations.

- ✓ large dimensions
- ✓ many options and variants
- ✓ model available for use in potentially explosive atmospheres




- suitable for built-in installation
- suitable for installation remote from the wall
- minimal distance allowed
- suitable for rigid wall, rigid floor and light wall (metal stud gypsum plasterboard wall), gypsum blocks and sandwich panel wall
- sealing with fire resistant stone wool boards allowed, also for asymmetric opening
- air tightness in accordance with EN 1751: class ATC 4 (formerly B), class ATC 3 in option (formerly C)
- tested according to EN 1366-2 up to 500 Pa
- operating mechanism outside the wall
- maintenance-free
- for indoor use
- operating temperature: max. 50°C
- intermediate dimensions on request
- Hygiene certificate for CU2: H > 600 or W > 800 (option when ordering)

1. connection flange PG30
2. casing made of refractory material
3. damper blade
4. operating mechanism
5. sealing cold smoke
6. blade bumper
7. intumescent strip
8. transmission with locking (open/closed)
9. fusible link
10. product identification

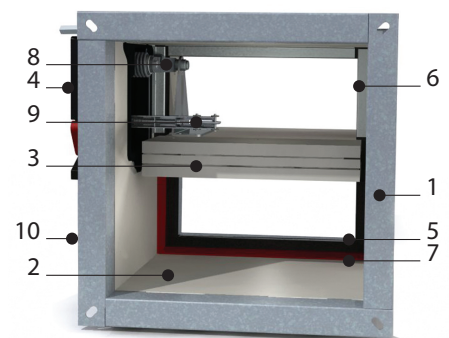

Range and dimensions CU2

	IV	IA
(W x H) mm	200x200	1500x1000



Wn/Hn in steps of 50 mm; intermediate dimensions are subject to extra cost (heights between ≥ 275 and ≤ 299 mm are not possible).

Exceeding blade: X = on the mechanism side, Y = on the wall side


Hn (mm)	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000
x	-	-	-	-	-	1	26	51	76	101	126	151	176	201	226
y	2	27	52	77	102	127	152	177	202	227	252	277	302	327	352

Variant CU2L

Damper with a tunnel casing extension at one or both sides so that the damper blade does not exceed the tunnel. This version allows to connect a grill or a bend directly on the damper flange or to use a circular connection.


- extension: a = $Hn/2-230$ mm (on the side of the mechanism);
b = $Hn/2-100$ mm (on the wall side)

1. connection flange PG30
2. casing made of refractory material
3. damper blade
4. operating mechanism
5. sealing cold smoke
6. blade bumper
7. intumescent strip
8. transmission with locking (open/closed)
9. fusible link
10. product identification
11. graphite strip
12. wall limit

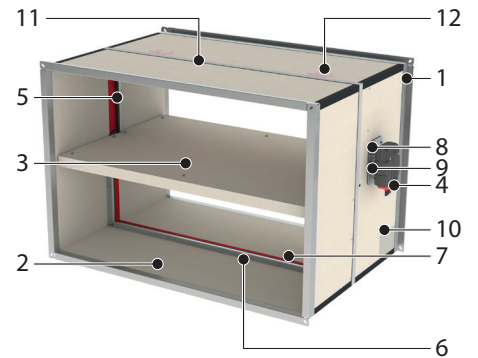

Range and dimensions CU2L

	IV	IA
(W x H) mm	200x200	1500x1000




extension: a = $Hn/2-230$ mm (on the side of the mechanism); b = $Hn/2-100$ mm (on the wall side)

Variant CU2-L500


CU2 damper with a tunnel casing extension at the wall side to facilitate the connection to the duct when the supporting construction is thicker than 100 mm. This version also ensures that the damper blade doesn't exceed the casing at the wall side (up to a height of 500 mm), which allows to connect a grill or a bend directly on the damper flange or to use a circular connection.

1. connection flange PG30
2. casing made of refractory material
3. damper blade
4. operating mechanism
5. sealing cold smoke
6. blade bumper
7. intumescent strip
8. transmission with locking (open/closed)
9. fusible link
10. product identification
11. graphite strip
12. wall limit

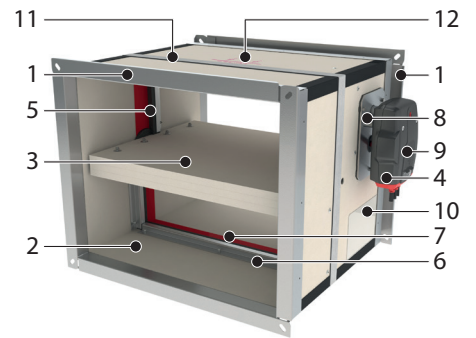

Range and dimensions CU2-L500

	IV	V
(W x H) mm	200x200	1500x1000



Wn/Hn in steps of 50 mm; intermediate dimensions are subject to extra cost (heights between ≥ 275 and ≤ 299 mm are not possible).

Hn (mm)	500	550	600	650	700	750	800	850	900	950	1000
x	-	1	26	51	76	101	126	151	176	201	226
y	2	27	52	77	102	127	152	177	202	227	252


Variant CU2 ATEX

Explosion protected fire damper for use in zone 1,2 (gas) and zone 21,22 (combustible dust). The option is available on all dimensions of the CU2.

- ATEX certificate TÜV 14 ATEX 7540 X




1. explosion proof mechanism
2. equipotential connection

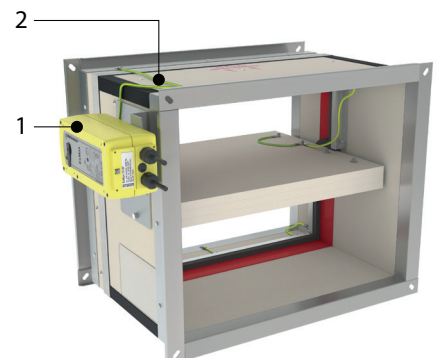

Range and dimensions CU2 ATEX

	IV	IA
(W x H) mm	200x200	1500x1000



Wn/Hn in steps of 50 mm; intermediate dimensions are subject to extra cost (heights between ≥ 275 and ≤ 299 mm are not possible).

Exceeding blade: X = on the mechanism side, Y = on the wall side

Hn (mm)	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000
x	-	-	-	-	-	1	26	51	76	101	126	151	176	201	226
y	2	27	52	77	102	127	152	177	202	227	252	277	302	327	352

Variant CU2L ATEX

Explosion protected fire damper for use in zone 1,2 (gas) and zone 21,22 (combustible dust) with a tunnel casing extension at one or both sides so that the damper blade does not exceed the tunnel. This extension makes it possible to use a circular connection (PRJ flange).


✓ ATEX certificate TÜV 14 ATEX 7540 X



- extension: a = $Hn/2 - 230$ mm (on the side of the mechanism);
b = $Hn/2 - 100$ mm (on the wall side)

Range and dimensions CU2L ATEX


	IV	IA
(W x H) mm	200x200	1500x1000




Wn/Hn in steps of 50 mm; intermediate dimensions are subject to extra cost (heights between ≥ 275 and ≤ 299 mm are not possible).

Exceeding blade: X = on the mechanism side, Y = on the wall side

Hn < 300 mm



Hn ≥ 300 mm



	CFTH	ONE(X)	BFL(T)	E/RMEX(T)		CFTH	ONE(X)	BFL(T)	BFN(T)	E/RMEX(T)
P	78	104	96	118	P	78	104	96	100	118
Q	180	191	110	95	Q	180	191	110	110	95
Z	62	47	74	72,5	Z	157	147	180	180	167,5

Evolution - kits

	KIT ONE T 24 FDCB	Spring return actuator ONE 24V (with fusible link T) + bipolar beginning- and end-of-range switch
	KIT ONE T 24 FDCU	Spring return actuator ONE 24V (with fusible link T) + unipolar beginning- and end-of-range switch
	KIT ONE T 24 FDCU ST	Spring return actuator ONE 24V (with fusible link T) + unipolar beginning- and end-of-range switch + plug (ST)
	KIT ONE T 230 FDCB	Spring return actuator ONE 230V (with fusible link T) + bipolar beginning- and end-of-range switch
	KIT ONE T 230 FDCU	Spring return actuator ONE 230V (with fusible link T) + unipolar beginning- and end-of-range switch
	KIT ONE T 230 FDCU ST	Spring return actuator ONE 230V (with fusible link T) + unipolar beginning- and end-of-range switch + plug (ST)
	KIT ONE-X 24	Spring return actuator ONE-X 24V (with fusible link T)



KIT ONE-X 230

Spring return actuator ONE-X 230V (with fusible link T)



KIT CFTH

Automatic unlocking mechanism CFTH with FCU and without FTH 72



KIT BFL24

Spring return actuator BFL 24V



KIT BFL24-ST

Spring return actuator BFL 24V with plug (ST)



KIT BFL230

Spring return actuator BFL 230V




KIT BFLT24

Spring return actuator BFL 24V with thermo-electric fuse (T)



KIT BFLT24-ST

Spring return actuator BFL 24V with thermo-electric fuse (T) and plug (ST)



KIT BFLT230

Spring return actuator BFL 230V with thermo-electric fuse (T)



KIT BFLT230-ST

Spring return actuator BFL 230V with thermo-electric fuse (T)




KIT BFN24

Spring return actuator BFN 24V



KIT BFN24-ST

Spring return actuator BFN 24V with plug (ST)



KIT BFN230

Spring return actuator BFN 230V




KIT BFN24

Spring return actuator BFN 24V with thermo-electric fuse (T)




KIT BFN24-ST

Spring return actuator BFN 24V with thermo-electric fuse (T) and plug (ST)











KIT BFN230

Spring return actuator BFN 230V with thermo-electric fuse (T)



KIT BFN230-ST

Spring return actuator BFN 230V with thermo-electric fuse (T)

	KIT FDC CFTH	1 limit switch (FCU/DCU/FCB/DCB)
	KIT SN2 BFL/BFN	Auxiliary limit switch 'open/closed'
	KIT FTH72	Fusible link FTH 72°C (for CFTH)
	KIT ZBAT 72	Black spare part for thermo-electric fuse for BFLT/BFNT
	FUS72 ONE	Fusible link 72°C
	MECT	Testbox for mechanisms 24/48 V (magnet, motor, beginning and end of range switches)
	KIT BPLATE ONE(-X)	Set of base plate and mounting parts for spring return actuators ONE and ONE-X. Only applicable for fire dampers type CR2, CU2(/B), CU4, CU2-15. To be used when changing the type of mechanism if no base plate is present with the original mechanism or a different type of base plate was used. Mounting in combination with a ONE(-X) type motor kit.
	KIT BPLATE BFL/BFN	Set of base plate and mounting parts for spring return actuators type BFL(T) or BFN(T). Only applicable for fire dampers type CR2, CU2(/B), CU4, CU2-15. To be used when changing the type of mechanism if no base plate is present with the original mechanism or another type of base plate was used. Mounting in combination with a motor kit type BFL(T) or BFN(T).
	KIT BPLATE BF	Set of base plate and mounting parts for spring return actuators type BF(T). Only applicable for fire dampers type CR2, CU2(/B), CU4, CU2-15 produced before 1/7/2015.



KITS EQ


Kit equipotential connection (per set of 5 pieces)



KIT UG8


The UG8 optical smoke detector is a standalone unit for duct mounting. It samples air in the ventilation duct via the venturi-tube and analyses it in the housing situated outside of the duct. The UG8 is CE-marked product, certified according to EN54-27. It can be connected directly with a fire damper: in the event of smoke detection, the UG8 shuts off the power to the fire damper actuator and closes the damper. The UG8 is fitted with LEDs showing normal operation, smoke alarm, contamination and service alarms. The status can also be checked remotely via relay outputs.

Options - at the time of order



UL

Inspection shutter (set of 2)



EQ

Equipotential connection



EN1751_ATC_3


Air-tightness class ATC 3 (formerly C) (note: for CU2 H > 600 mm or W > 800 mm).



HY

Hygiene certificate according to VDI 6022-1 (note: for CU2 H > 600 mm or W > 800 mm)

Flange types - at the time of order

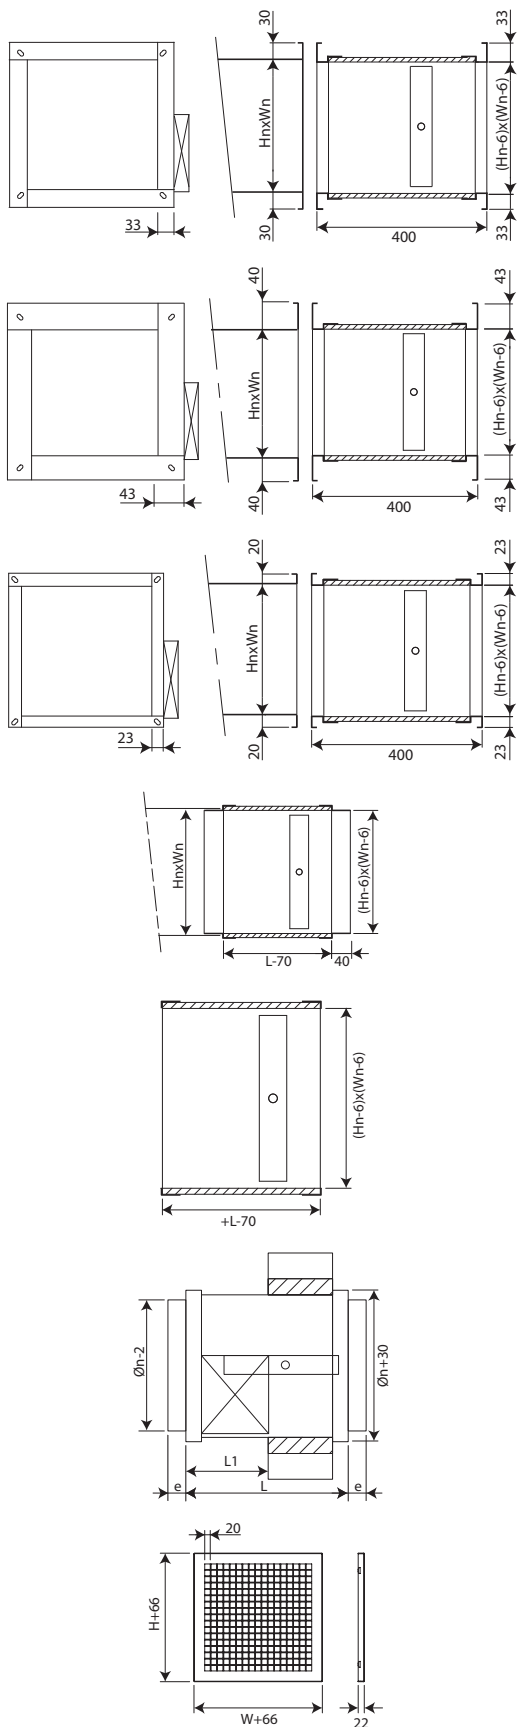

PG30

Connection to ducts with 30 mm flanges (either by sliding profile, or with bolts, or with clamps). Elliptical holes $\varnothing 8,5 \times 16$ mm.

PG40

Connection to ducts with 40 mm flanges (either by sliding profile, or with bolts, or with clamps). Elliptical holes $\varnothing 8,5 \times 16$ mm.

PG20

Connection to ducts with 20 mm flanges (either by sliding profile, or with bolts, or with clamps). Elliptical holes $\varnothing 6,5 \times 16$ mm.

PM

Connection to ducts by insertion. This type of frame is used in case of lack of space for a standard PG30 frame.

PP

No connection. This type of frame is used on one side of a damper that ends into a room.

PRJ

Circular connection with rubber sealing ring.

PPT

Grill. Very well suited as protection grill on the end piece of a duct system.

Storage and handling

As this product is a safety element, it should be stored and handled with care.

Avoid:

- any kind of impact or damage
- contact with water
- deformation of the casing

It is recommended:


- to unload in a dry area
- not to flip or roll the product to move it
- not to use the damper as a scaffold, working table, etc.
- not to store smaller dampers inside larger ones

Installation


General points

- The installation must comply with the installation manual and the classification report.
- Axis orientation: see the declaration of performance.
- Avoid obstruction of adjoining ducts.
- Product installation: always with closed damper blade.
- Verify if the blade can move freely.
- Please observe safety distances with respect to other construction elements. The operating mechanism must also remain accessible: allow for a clearance of 200 mm around the housing.
- The air tightness class will be maintained if the damper is installed according to the installation manual.
- Rf-t fire dampers are always tested in standardised constructions according to EN 1366-2. The achieved results are valid for similar supporting constructions with a fire resistance, thickness and density equal or superior to the supporting construction used during the test.
- If the wall thickness exceeds the minimum thickness specified in our installation instructions, the following conditions apply to the sealing depth:
 - For flexible walls and sandwich panel system walls, the seal must always be applied over the full depth of the wall.
 - With rigid walls, rigid floors and plaster block walls, the minimum sealing depth as indicated in our installation instructions (often equal to the minimum wall thickness) is sufficient. Apply the seal at the height of the damper blade (from the wall limit indication).
- When installing a fire damper in a flexible metal stud wall, some installation methods do not require reinforcing profiles around the wall opening from a fire protection point of view (see below). Always follow the general instructions of the manufacturer of these wall systems when building this type of wall.
- The damper must remain accessible for inspection and maintenance.
- Schedule at least 2 visual checks each year.

	TEST	
2023	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
2024	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
2025	<input checked="" type="checkbox"/>	<input type="checkbox"/>
2026	<input type="checkbox"/>	<input type="checkbox"/>
2027	<input type="checkbox"/>	<input type="checkbox"/>



Installation at a minimal distance from another damper or from an adjacent supporting construction

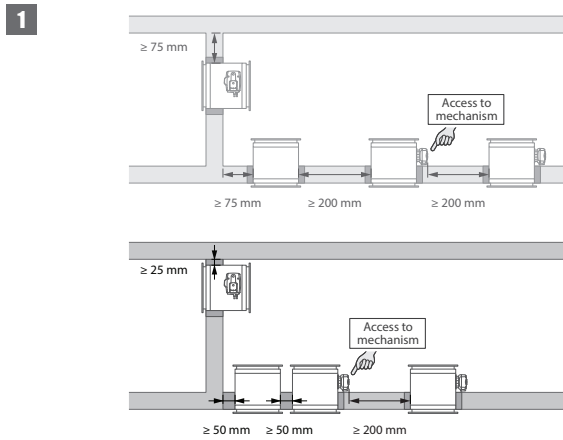


1. Principle

According to the European test standard EN 1366-2, a fire damper must be installed at a minimum distance of 75 mm from an adjacent supporting construction (wall/floor) and 200 mm from another damper, unless the solution was tested at a shorter distance.

This range of Rf-t fire dampers has been successfully tested and can be installed in a vertical or horizontal supporting construction, at a distance below the minimum set by the standard.


For rectangular dampers, the minimal distance is set to 50 mm between 2 dampers or between a damper and a vertical wall, and to 25 mm between a damper and a floor/ceiling.

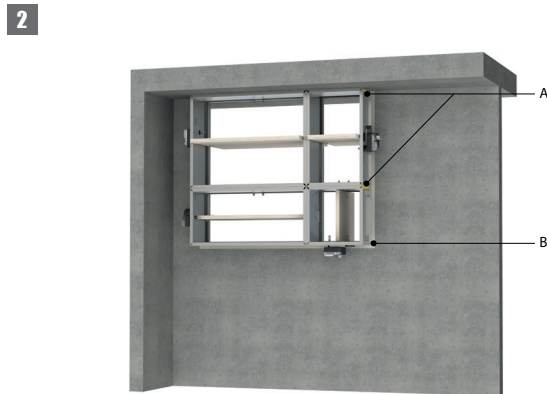

2. Certified solution

For the Rf-t fire dampers, the solution consists of the following elements: A: Universal sealing for minimal distance; B: Sealing compliant with existing classifications (Declaration of Performance).

- A. Sealing of the opening at the side with minimal distances between damper and wall/ceiling or another fire damper: rigid stone wool panels (150 kg/m^3) are applied to a depth of min. 400 mm, of which 150 mm on the mechanism side of the wall. On the non-mechanism side of the wall, the stone wool panels must be at least flush with the wall. This sealing is applied over the whole width/height of the damper(s).
When the damper is installed at a distance of 25 mm from a floor/ceiling, the rigid high-density stone wool panels (A) may be replaced with standard 40 kg/m^3 stone wool, compressed by at least 40%.
- B. Sealing of the rest of the opening according to the existing classifications for the fire damper (Declaration of Performance).
Detailed information for each wall/sealing combination can be found in the respective installation methods.

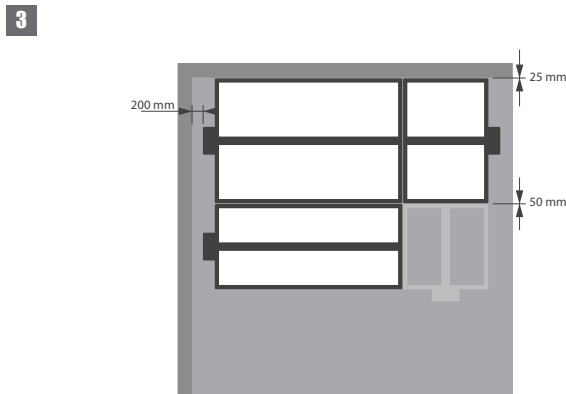

3. Restrictions

The installer may choose the direction of the blade axis freely: horizontal or vertical axis.





A maximum of 2 rectangular dampers can be installed at a minimum distance from one another, both vertically and horizontally (maximum cluster of 4 dampers).

Note: when sealing the opening with panels of fire resistant stone wool, the maximum number of dampers also depends on the maximum "blank seal" allowed for the selected sealing material. Please refer to the manufacturer's instructions for this information.


Installation in rigid wall and floor

The product was tested and approved in:


Range	Wall type	Sealing	Classification
200x200 mm ≤ CU2 ≤ 1500x1000 mm	Rigid wall	Aerated concrete ≥ 100 mm	Gypsum
200x200 mm ≤ CU2 ≤ 1500x1000 mm	Rigid wall	Aerated concrete ≥ 100 mm	Mortar
200x200 mm ≤ CU2 ≤ 1500x1000 mm	Rigid floor	Aerated concrete ≥ 150 mm	Mortar
200x200 mm ≤ CU2 ≤ 1200x800 mm	Rigid wall	Aerated concrete ≥ 100 mm	Mortar
200x200 mm ≤ CU2 ≤ 1200x800 mm	Rigid wall	Aerated concrete ≥ 100 mm	Gypsum
1200x800 mm < CU2 ≤ 1500x1000 mm	Rigid wall	Aerated concrete ≥ 100 mm	Mortar / Gypsum
1200x800 mm < CU2 ≤ 1500x1000 mm	Rigid wall	Aerated concrete ≥ 100 mm	Mortar / Gypsum
1200x800 mm < CU2 ≤ 1500x800 mm	Rigid wall	Aerated concrete ≥ 100 mm	Mortar
200x200 mm ≤ CU2 ≤ 1500x800 mm	Rigid floor	Aerated concrete ≥ 125 mm	Mortar

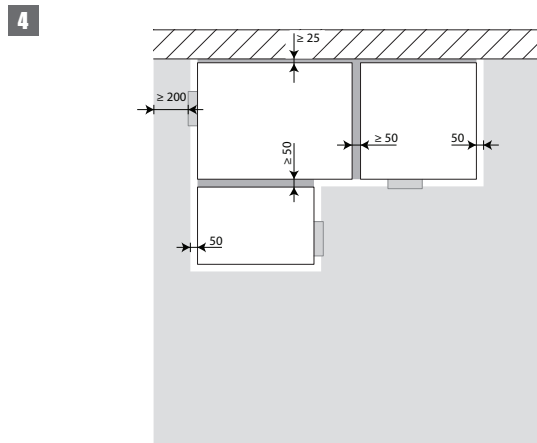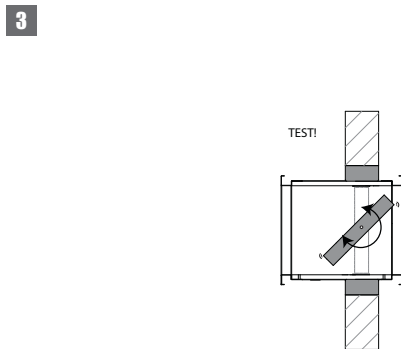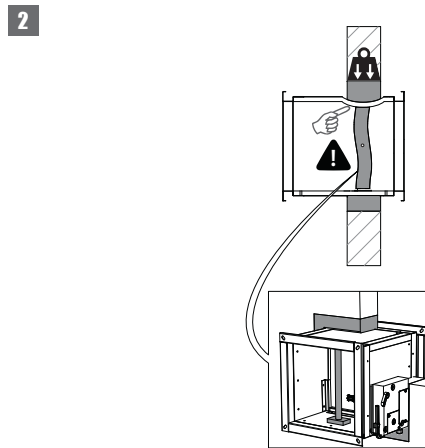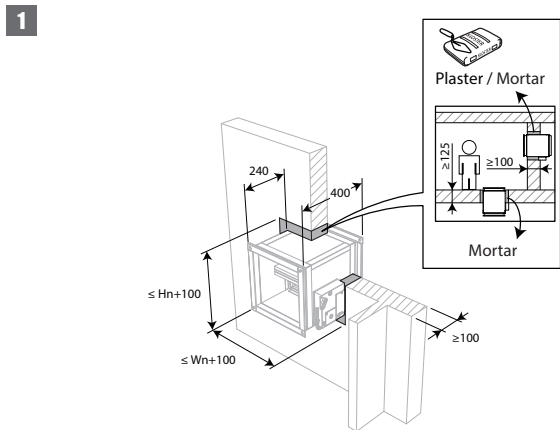


4. The dampers can be installed at a minimum distance from an adjacent floor/ceiling (≥ 25 mm), from an adjacent wall or from another damper (≥ 50 mm).

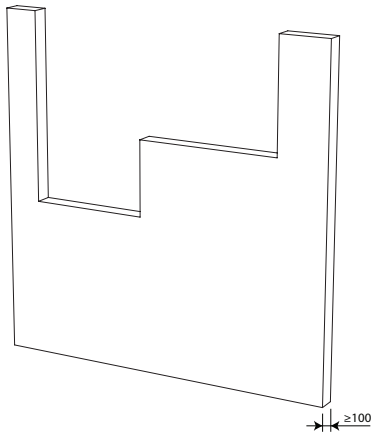5

5. Make the necessary openings
($W_n + 100 \text{ mm}$) x ($H_n + 100 \text{ mm}$) in the wall.

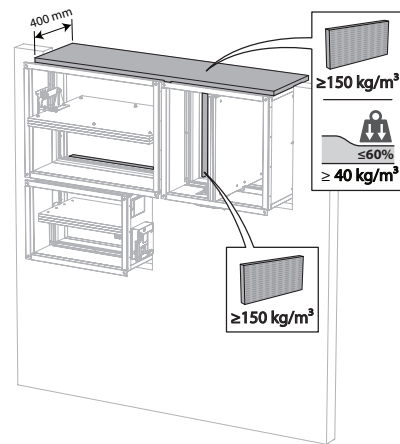6

6. Mount the dampers in the opening.
Apply rigid stone wool panels ($\geq 150 \text{ kg/m}^3$) to a depth of 400 mm (150 mm on the mechanism side of the wall) to seal the opening at the side with minimal distances. This sealing is applied over the whole width/height of the damper(s).
When the damper is installed at a distance of 25 mm from a floor/ceiling, the rigid high-density stone wool panels may be replaced with standard $\geq 40 \text{ kg/m}^3$ stone wool (e.g. Rockfit 431), compressed by at least 40%.

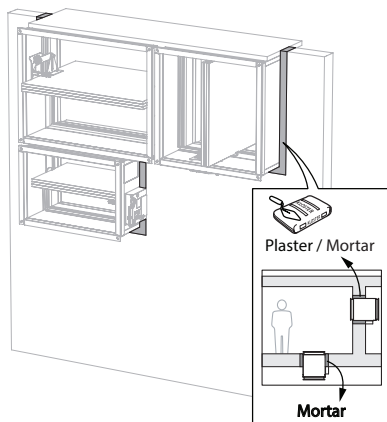7


7. Seal remaining opening with standard mortar or gypsum in solid wall. When used in rigid floor: seal with standard mortar.

Installation in flexible wall (metal stud gypsum plasterboard wall)


The product was tested and approved in:

Range	Wall type	Sealing	Classification
200x200 mm ≤ CU2 ≤ 1200x800 mm	Flexible wall	Metal studs gypsum plasterboard Type A (EN 520) ≥ 100 mm Stone wool ≥ 40 kg/m ³ + cover plates	EI 60 (v _e i ↔ o) S - (500 Pa)
200x200 mm ≤ CU2 ≤ 1200x800 mm	Flexible wall	Metal studs gypsum plasterboard Type F (EN 520) ≥ 100 mm Stone wool ≥ 40 kg/m ³ + cover plates	EI 90 (v _e i ↔ o) S - (500 Pa)
1200x800 mm < CU2 ≤ 1500x800 mm	Flexible wall	Metal studs gypsum plasterboard Type F (EN 520) ≥ 100 mm Stone wool ≥ 40 kg/m ³ + cover plates	EI 90 (v _e i ↔ o) S - (300 Pa)
1200x800 mm < CU2 ≤ 1500x800 mm	Flexible wall	Metal studs gypsum plasterboard Type F (EN 520) ≥ 100 mm Stone wool ≥ 40 kg/m ³ + cover plates	E 120 (v _e i ↔ o) S - (300 Pa)


1

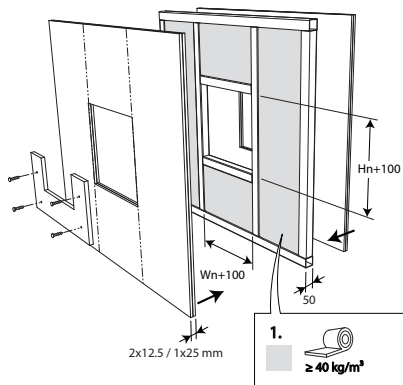


2




3

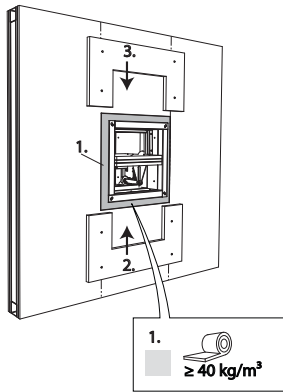

4




5

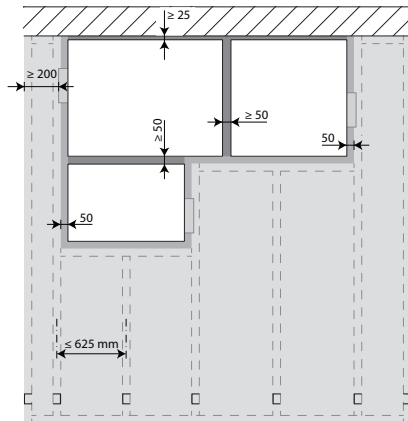


5. The dampers can be installed at a minimum distance from an adjacent floor/ceiling (≥ 25 mm), from an adjacent wall or from another damper (≥ 50 mm).

6

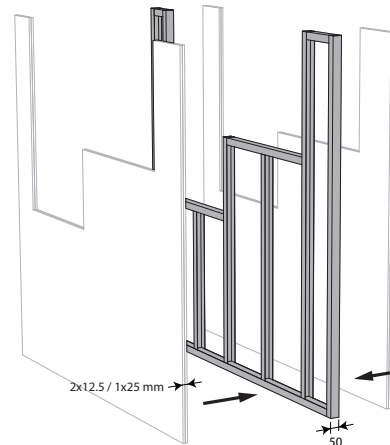

6. Build the drywall and mount horizontal and vertical studs around the opening.


7

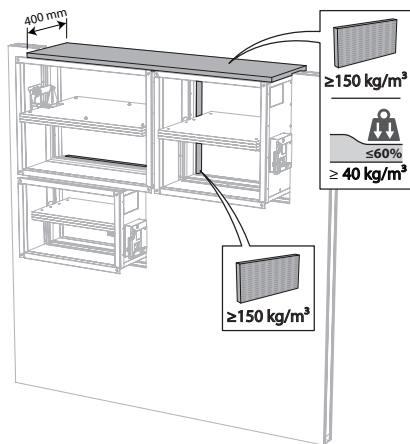

7. Mount the dampers in the opening.
Apply rigid stone wool panels (≥ 150 kg/m³) to a depth of 400 mm (150 mm on the mechanism side of the wall) to seal the opening at the side with minimal distances.
This sealing is applied over the whole width/height of the damper(s).


When the damper is installed at a distance of 25 mm from a floor/ceiling, the rigid high-density stone wool panels may be replaced with standard ≥ 40 kg/m³ stone wool (e.g. Rockfit 431), compressed by at least 40%.

8

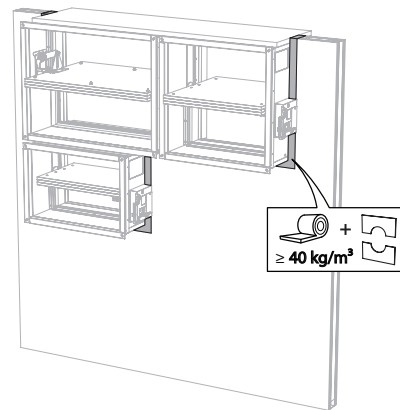

8. Seal the rest of the opening with standard stone wool 40 kg/m³ across the entire wall thickness.

9




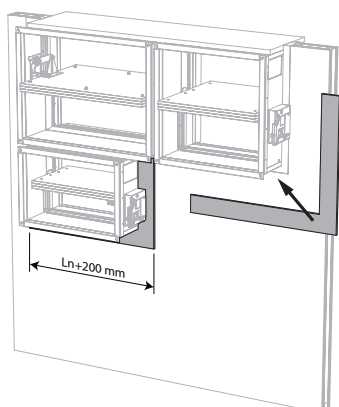


9. Apply cover plates (gypsum plasterboards) to finish the surface at both sides.
Seal off the space between the plasterboards with jointfiller.

Installation in flexible wall (metal stud gypsum plasterboard wall), sealing with gypsum


The product was tested and approved in:

Range	Wall type	Sealing	Classification
$200 \times 200 \text{ mm} \leq \text{CU2} \leq 1500 \times 1000 \text{ mm}$	Flexible wall	Gypsum	EI 60 ($v_e i \leftrightarrow o$) S - (500 Pa)
$200 \times 200 \text{ mm} \leq \text{CU2} \leq 1500 \times 1000 \text{ mm}$	Flexible wall	Gypsum	EI 120 ($v_e i \leftrightarrow o$) S - (500 Pa)

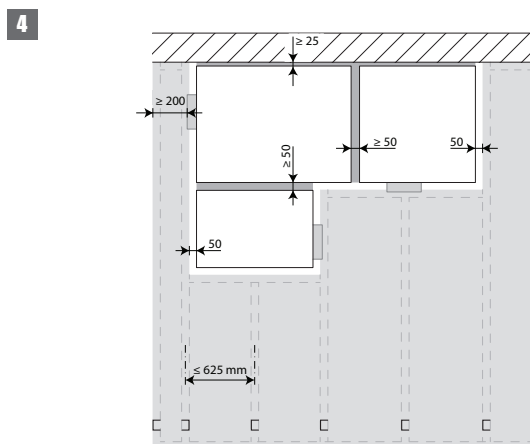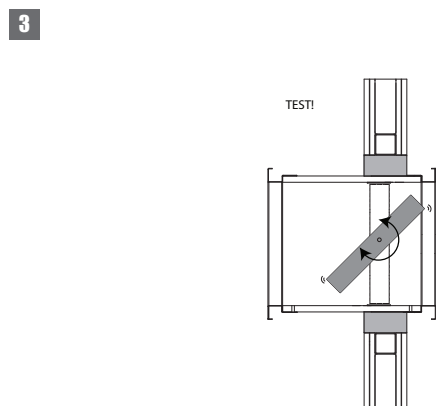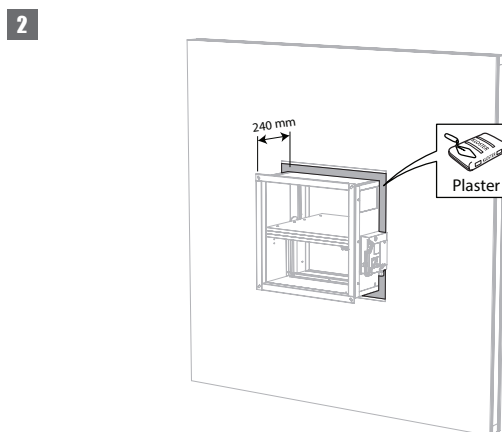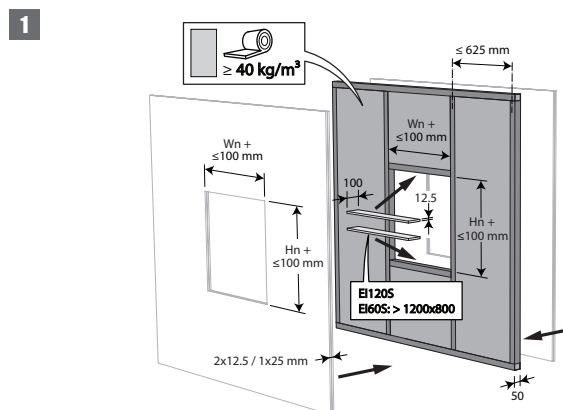


4. The dampers can be installed at a minimum distance from an adjacent floor/ceiling ($\geq 25 \text{ mm}$), from an adjacent wall or from another damper ($\geq 50 \text{ mm}$).

5

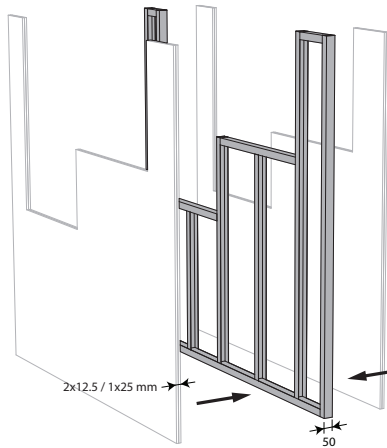


5. Build the drywall and mount horizontal and vertical studs around the opening.

6

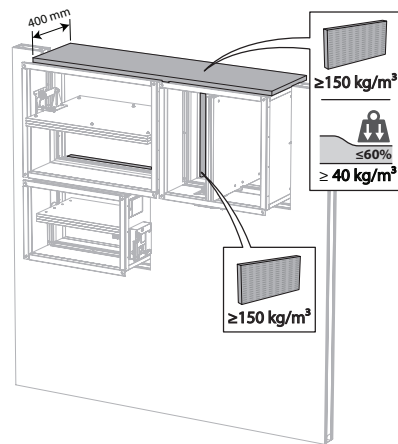

6. Mount the dampers in the opening.
Apply rigid stone wool panels ($\geq 150 \text{ kg/m}^3$) to a depth of 400 mm (150 mm on the mechanism side of the wall) to seal the opening at the side with minimal distances. This sealing is applied over the whole width/height of the damper(s).
When the damper is installed at a distance of 25 mm from a floor/ceiling, the rigid high-density stone wool panels may be replaced with standard $\geq 40 \text{ kg/m}^3$ stone wool (e.g. Rockfit 431), compressed by at least 40%.

7




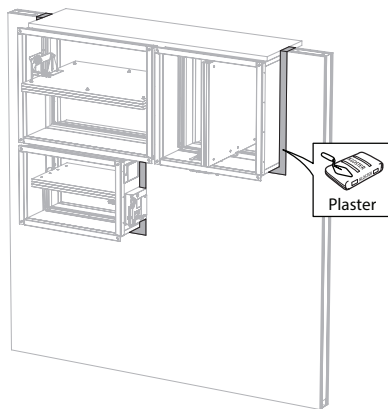


7. Seal the rest of the opening (50 mm) with standard gypsum across the entire wall thickness.

Installation in flexible wall (metal stud gypsum plasterboard wall), sealing with mortar


The product was tested and approved in:

Range	Wall type	Sealing	Classification
$200 \times 200 \text{ mm} \leq \text{CU2} \leq 1500 \times 1000 \text{ mm}$	Flexible wall	Mortar	El 60 (v_e i \leftrightarrow o) S - (300 Pa)
$200 \times 200 \text{ mm} \leq \text{CU2} \leq 1500 \times 1000 \text{ mm}$	Flexible wall	Mortar	El 90 (v_e i \leftrightarrow o) S - (300 Pa)

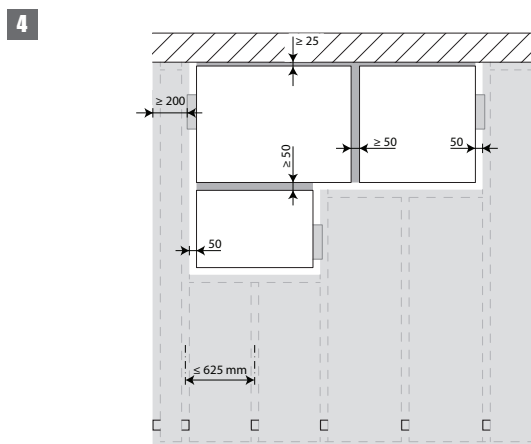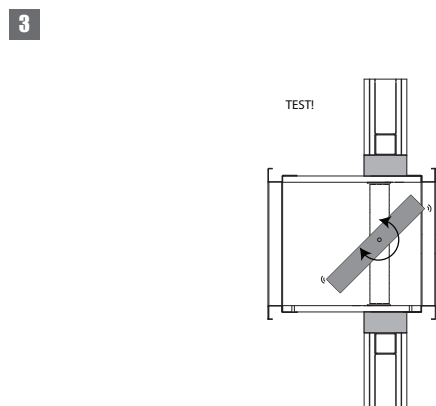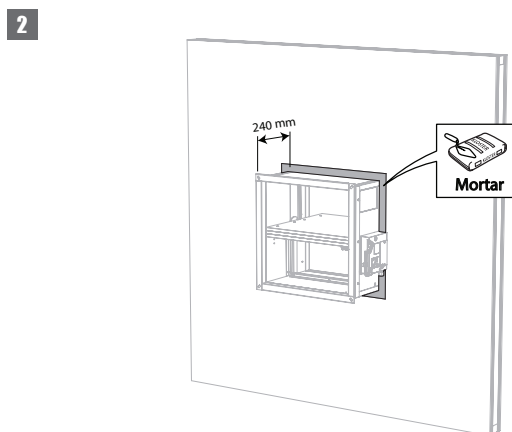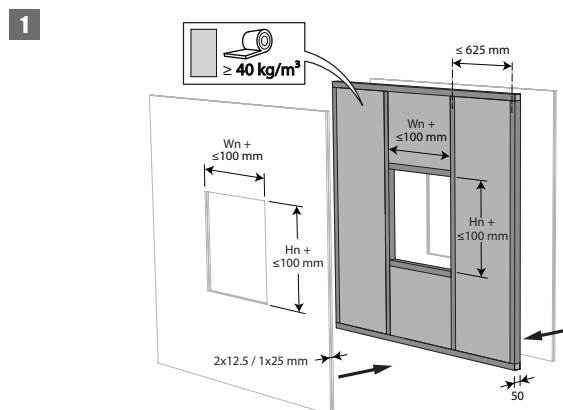


4. The dampers can be installed at a minimum distance from an adjacent floor/ceiling ($\geq 25 \text{ mm}$), from an adjacent wall or from another damper ($\geq 50 \text{ mm}$).

5

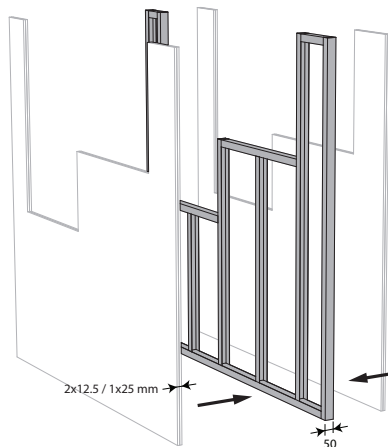


5. Build the drywall and mount horizontal and vertical studs around the opening.

6

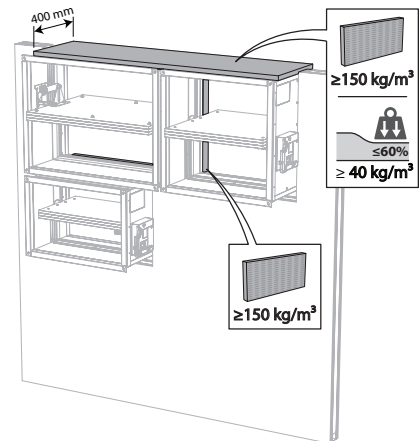

6. Mount the dampers in the opening.
 Apply rigid stone wool panels ($\geq 150 \text{ kg/m}^3$) to a depth of 400 mm (150 mm on the mechanism side of the wall) to seal the opening at the side with minimal distances. This sealing is applied over the whole width/height of the damper(s).
 When the damper is installed at a distance of 25 mm from a floor/ceiling, the rigid high-density stone wool panels may be replaced with standard $\geq 40 \text{ kg/m}^3$ stone wool (e.g. Rockfit 431), compressed by at least 40%.

7


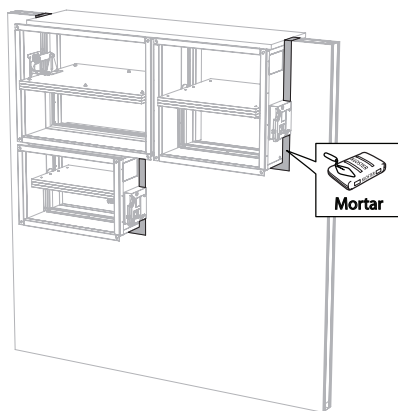


7. Seal the rest of the opening (50 mm) with standard mortar across the entire wall thickness.



Installation in gypsum block wall

The product was tested and approved in:

Range	Wall type	Sealing	Classification
$200 \times 200 \text{ mm} \leq \text{CU2} \leq 1500 \times 1000 \text{ mm}$	Flexible wall	Gypsum blocks $\geq 100 \text{ mm}$	EI 120 ($v_e i \leftrightarrow o$) S - (500 Pa)
$200 \times 200 \text{ mm} \leq \text{CU2} \leq 1200 \times 800 \text{ mm}$	Flexible wall	Gypsum blocks $\geq 70 \text{ mm}$	EI 120 ($v_e i \leftrightarrow o$) S - (500 Pa)

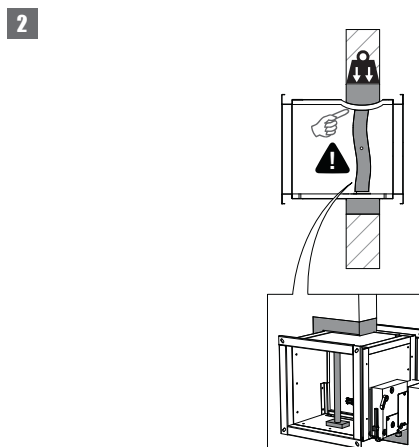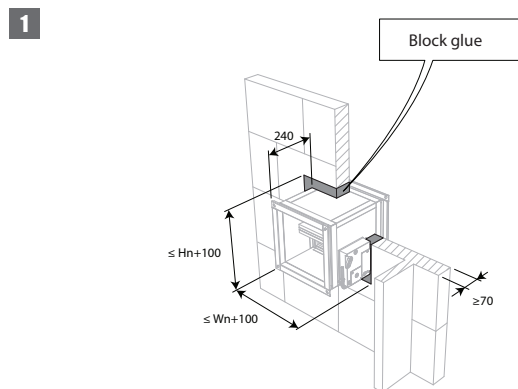


1. Seal the fire damper with a gypsum-based block glue.

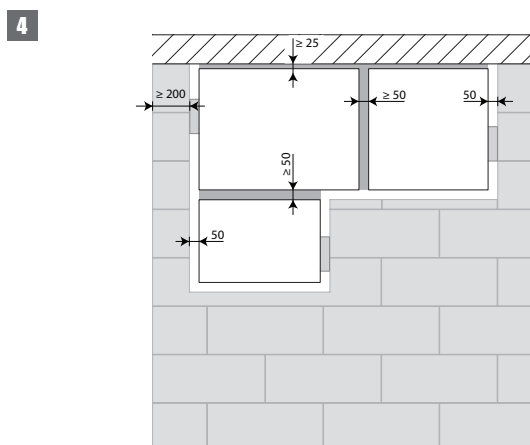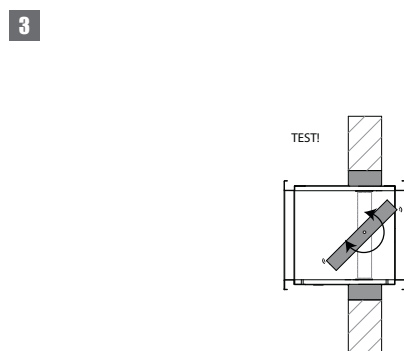


4. The dampers can be installed at a minimum distance from an adjacent floor/ceiling ($\geq 25 \text{ mm}$), from an adjacent wall or from another damper ($\geq 50 \text{ mm}$).

5

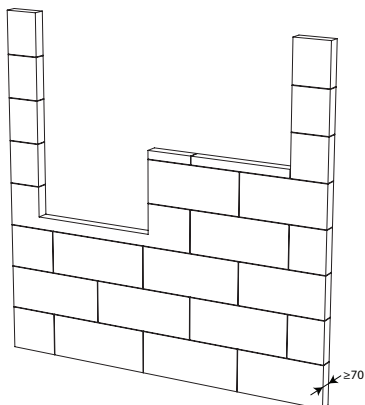


5. Make the necessary openings
 (Wn + 100 mm) x (Hn + 100 mm) in the wall.

6

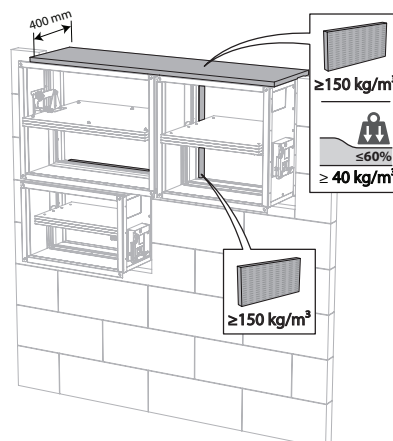

6. Mount the dampers in the opening.
 Apply rigid stone wool panels ($\geq 150 \text{ kg/m}^3$) to a depth of 400 mm (150 mm on the mechanism side of the wall) to seal the opening at the side with minimal distances. This sealing is applied over the whole width/height of the damper(s).
 When the damper is installed at a distance of 25 mm from a floor/ceiling, the rigid high-density stone wool panels may be replaced with standard $\geq 40 \text{ kg/m}^3$ stone wool (e.g. Rockfit 431), compressed by at least 40%.

7


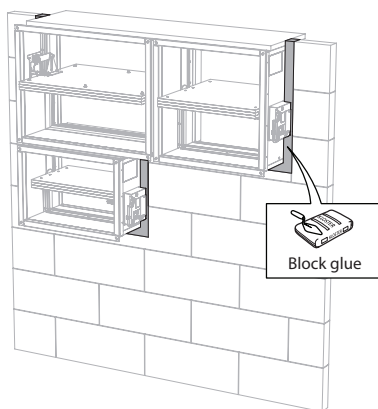


7. Seal the rest of the opening (50 mm) with block glue across the entire wall thickness.



Installation in flexible and rigid wall, sealing with rigid stone wool boards with coating

The product was tested and approved in:

Range	Wall type	Sealing	Classification
$200 \times 200 \text{ mm} \leq \text{CU2} \leq 1200 \times 800 \text{ mm}$	Rigid wall	Aerated concrete $\geq 100 \text{ mm}$	El 90 (v_e i \leftrightarrow o) S - (300 Pa)
$200 \times 200 \text{ mm} \leq \text{CU2} \leq 1200 \times 800 \text{ mm}$	Flexible wall	Metal studs gypsum plasterboard Type A (EN 520) $\geq 100 \text{ mm}$	El 60 (v_e i \leftrightarrow o) S - (300 Pa)
$200 \times 200 \text{ mm} \leq \text{CU2} \leq 1200 \times 800 \text{ mm}$	Flexible wall	Metal studs gypsum plasterboard Type F (EN 520) $\geq 100 \text{ mm}$	El 90 (v_e i \leftrightarrow o) S - (300 Pa)

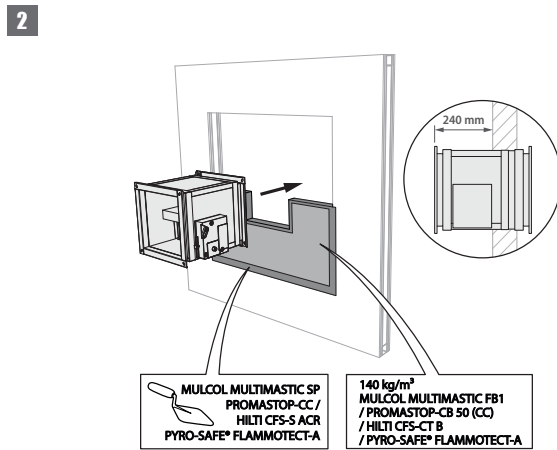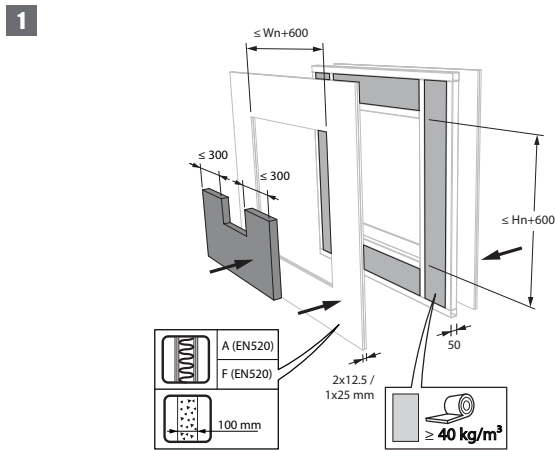


1. The opening around the damper is sealed with 2 layers of 50 mm-thick mineral wool panels with fire resistant coating on one side (type PROMASTOP-CB 50 / PROMASTOP-CB/ CC 50 / HILTI CFS-CT B / Mulcol Multimastic FB1 / PYRO-SAFE® FLAMMOTECT-A).

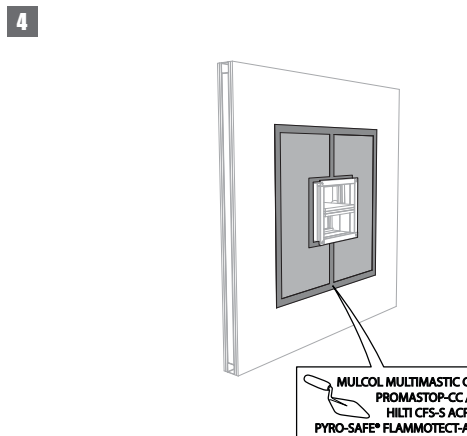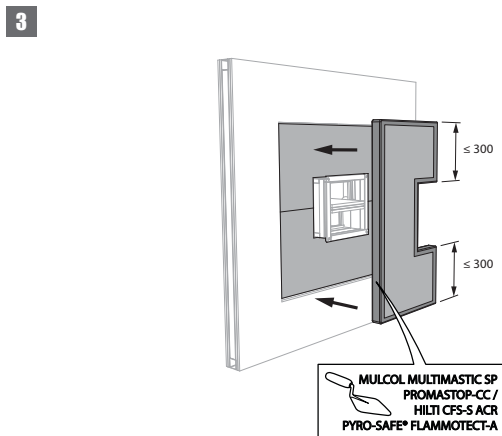


4. The joints on these 2 layers must be installed staggered and covered all around the edge with coating (type PROMASTOP-CC / HILTI CFS-S-ACR / Mulcol Multimastic SP / PYRO-SAFE® FLAMMOTECT-A).

9

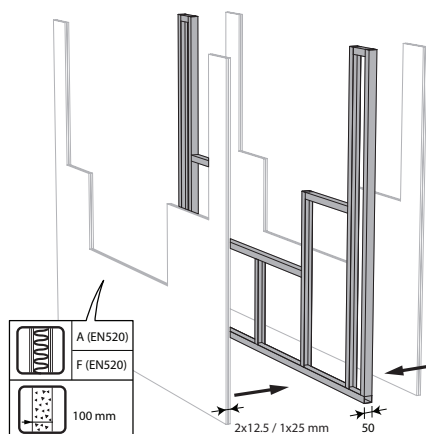


9. Make the necessary opening in the wall.

10

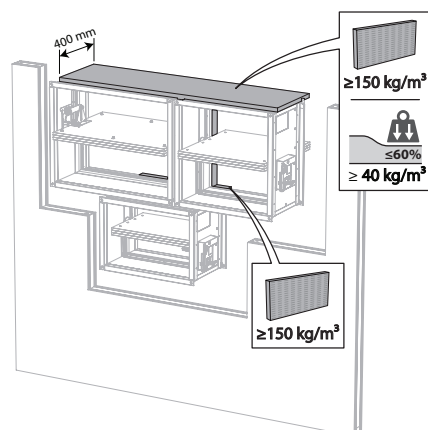


10. Mount the dampers in the opening.
Apply rigid stone wool panels ($\geq 150 \text{ kg/m}^3$) to a depth of 400 mm (150 mm on the mechanism side of the wall) to seal the opening at the side with minimal distances. This sealing is applied over the whole width/height of the damper(s).
When the damper is installed at a distance of 25 mm from a floor/ceiling, the rigid high-density stone wool panels may be replaced with standard $\geq 40 \text{ kg/m}^3$ stone wool (e.g. Rockfit 431), compressed by at least 40%.

11

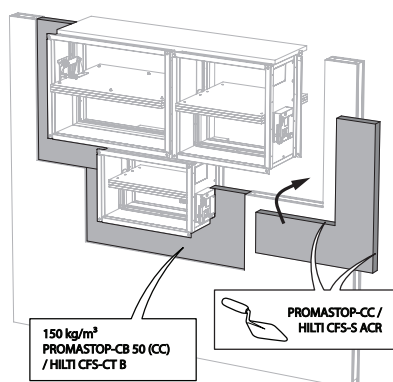

11. Seal the rest of the opening with 2 layers of 50 mm-thick coated rigid mineral wool panels (see above).

12




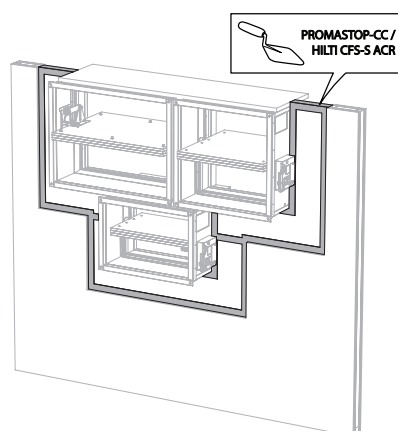


Installation remote from the wall, sealing and insulation with rigid stone wool boards with coating

*For classification up to EI 60 S: fire batt/stone wool boards of type PYRO-SAFE® FLAMMOTECT-A may be replaced by a similar type of fire batt with at least the same fire reaction class, density and thickness (tested according to EN 1366-3).

The product was tested and approved in:


Range	Wall type	Sealing	Classification
200x200 mm ≤ CU2 ≤ 1500x1000 mm	Rigid wall	Aerated concrete ≥ 100 mm	EI 90 (v _e i ↔ o) S - (300 Pa)
200x200 mm ≤ CU2 ≤ 1500x1000 mm	Flexible wall	Metal studs gypsum plasterboard Type A (EN 520) ≥ 100 mm	EI 60 (v _e i ↔ o) S - (300 Pa)
200x200 mm ≤ CU2 ≤ 1500x1000 mm	Flexible wall	Metal studs gypsum plasterboard Type F (EN 520) ≥ 100 mm	EI 90 (v _e i ↔ o) S - (300 Pa)

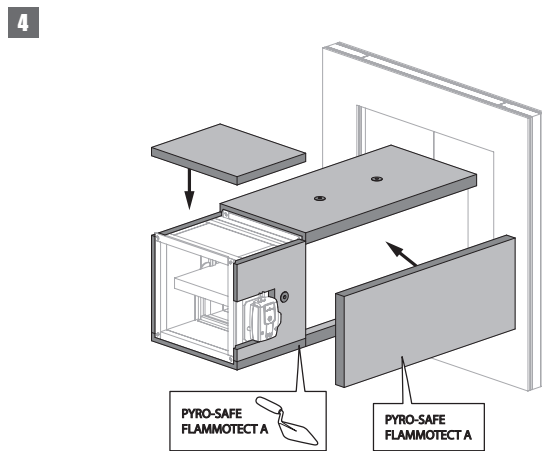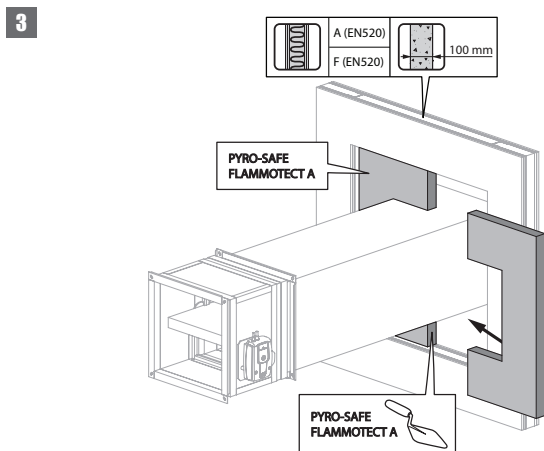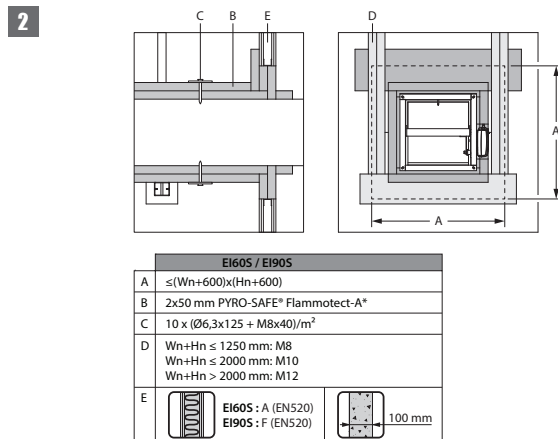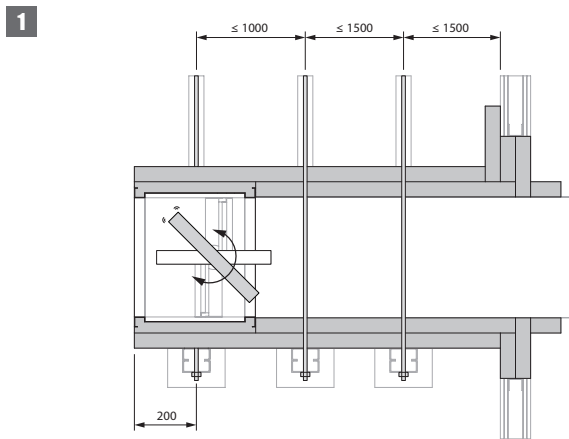

3. An opening is provided in the wall of maximum (Wn+600 mm) x (Hn+600 mm) through which the ventilation duct runs. The opening around the duct in the wall will be sealed with one layer of coated stone wool type PYRO-SAFE® Flammotect-A. The edges will be sealed with PYRO-SAFE® Flammotect-A paste which will secure the boards.


4. The duct and the fire damper will be lined with coated stone wool boards over their full length. To attach the boards to the duct, they will be coated with fire-resistant paste on the side along the duct and on the edges and attached with bolts and washers (C). The boards at the level of the fire damper are adjusted so that they form a single surface together with the plates on the ventilation duct, leaving space for the mechanism.

5

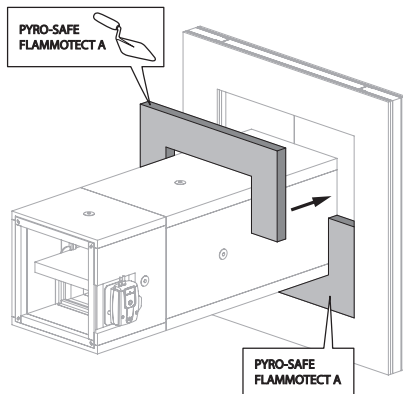


5. The second layer of coated stone wool is placed in the wall, the edges of which are sealed with fire-resistant paste.

6

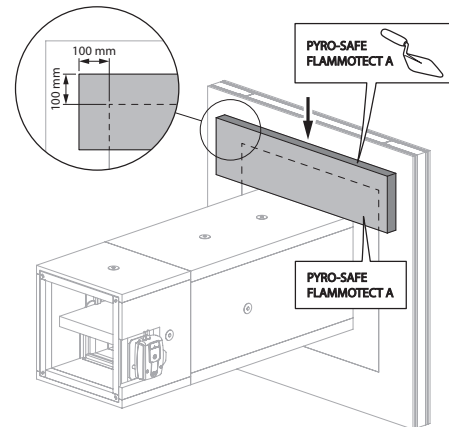


6. On the damper side of the wall, an extra layer of coated stone wool boards is added at the top, overlapping 100 mm with the wall along the two sides and the top. The edges of these boards are also provided with a layer of fire-resistant paste.

7


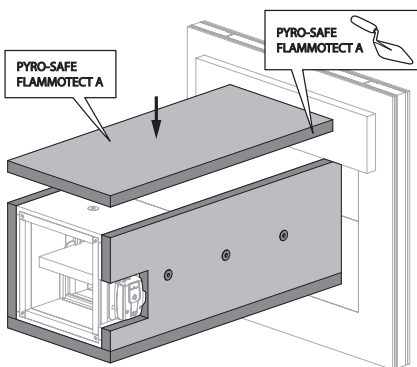


7. A second layer of coated stone wool boards will be added around the duct and fire damper, and the edges of the boards will again be treated with a layer of fire-resistant paste. The boards will be attached with bolts and washers (C).


8

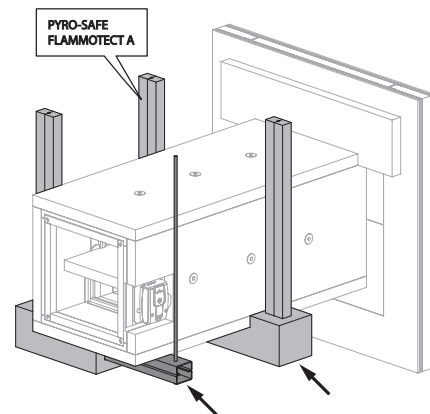

8. The support is placed and both the profiles and the threaded rods are wrapped with a layer of coated stone wool boards. Fire-resistant paste is applied to the edges.

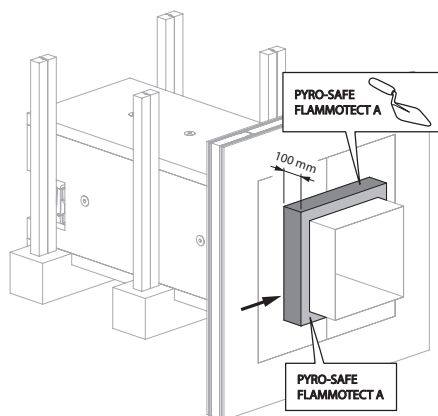9**10**

9. On the wall side away from the fire damper, a strip of coated stone wool is applied around the duct. This strip is 100 mm wide and the edges are covered with a layer of fire-resistant paste.

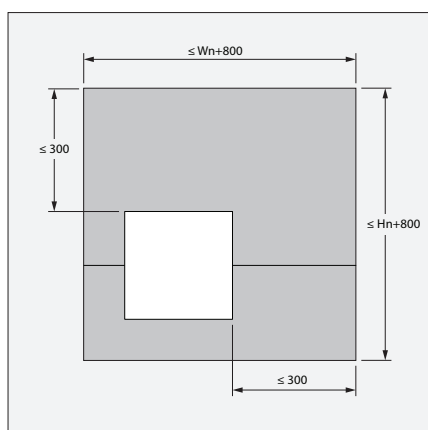11


11. The fire damper and the ventilation duct can be placed out of centre of the opening. The distance between the duct and the edge of the opening should not exceed 300 mm.

Installation in rigid floor, sealing with rigid stone wool boards with coating


The product was tested and approved in:

Range	Wall type	Sealing	Classification
$200 \times 200 \text{ mm} \leq \text{CU2} \leq 1200 \times 800 \text{ mm}$	Rigid floor	Aerated concrete $\geq 150 \text{ mm}$	Stone wool + coating $\geq 140 \text{ kg/m}^3$
			El 90 (h_0 i ↔ o) S - (300 Pa)

1

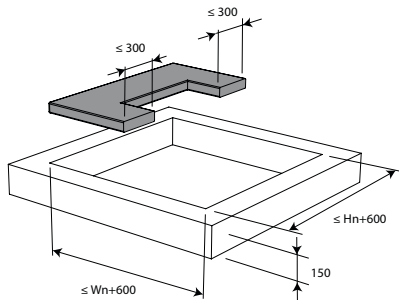


2

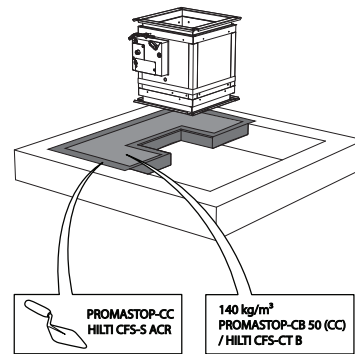


1. The opening around the damper is sealed with 2 layers of 50 mm-thick mineral wool panels with fire resistant coating on one side (type PROMASTOP-CB 50 / PROMASTOP-CB/CC 50 / HILTI CFS-CT B).

3

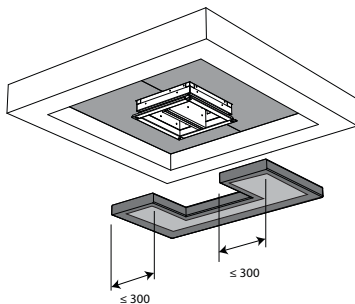


4

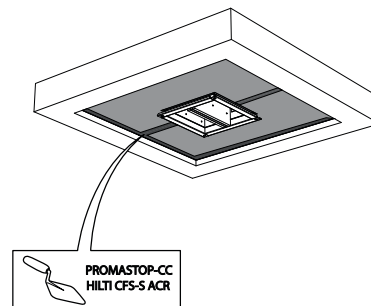


3. The joints on these 2 layers must be installed staggered and covered all around the edge with coating (type PROMASTOP-CC / HILTI CFS-S-ACR).

5

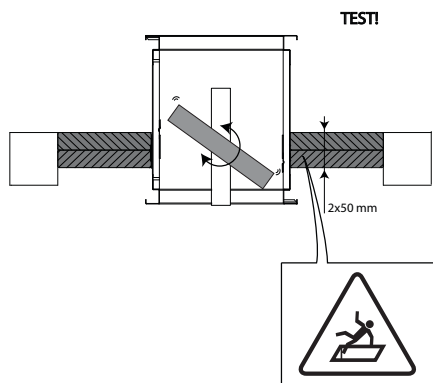


6

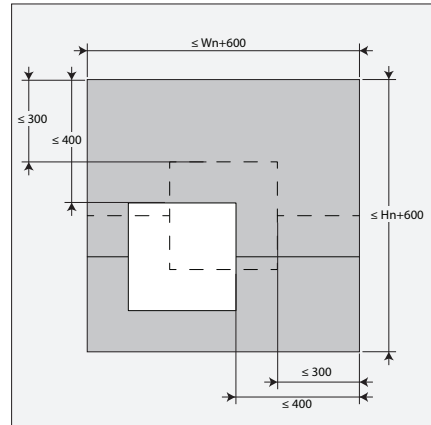

6. The damper does not need to be centered in the opening (with max dimensions fire damper + 600 mm). The maximal distance between the damper and the edge of the opening is 400 mm.

7

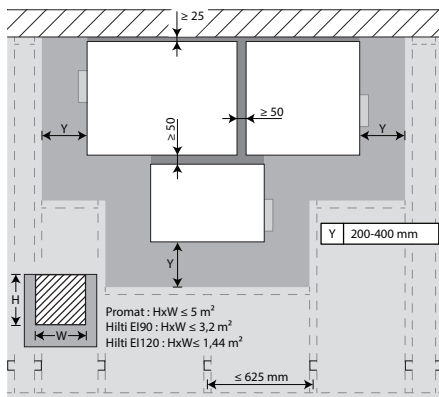





7. The dampers can be installed at a minimum distance from an adjacent floor/ceiling (≥ 25 mm), from an adjacent wall or from another damper (≥ 50 mm).

For details, please refer to 'Installation in flexible and rigid wall, sealing with rigid stone wool boards with coating'

Installation in shaft wall

The product was tested and approved in:

Range	Wall type	Sealing	Classification
$200 \times 200 \text{ mm} \leq \text{CU2} \leq 1500 \times 800 \text{ mm}$	Asymmetrical flexible wall (shaft wall)	Metal studs gypsum plasterboard Type F (EN 520) $\geq 82.5 \text{ mm}$	Stone wool $\geq 40 \text{ kg/m}^3$ + cover plates
			El 60 (v _e i ↔ o) S - (300 Pa)

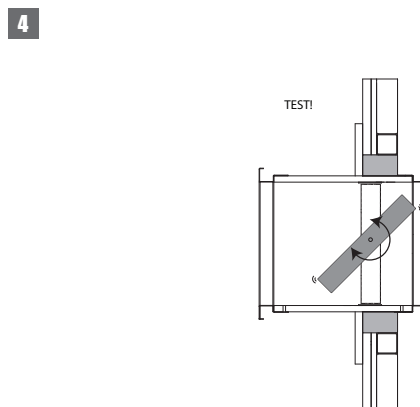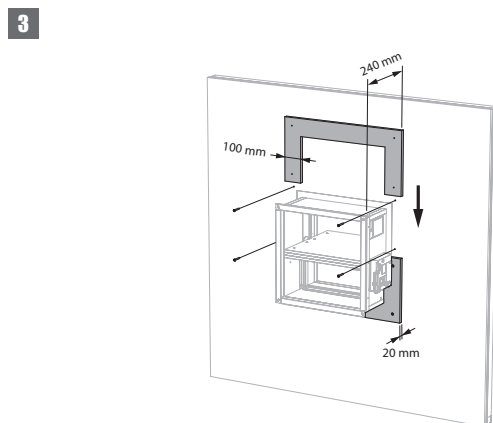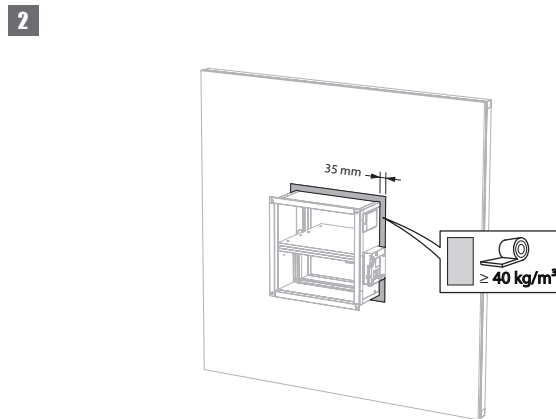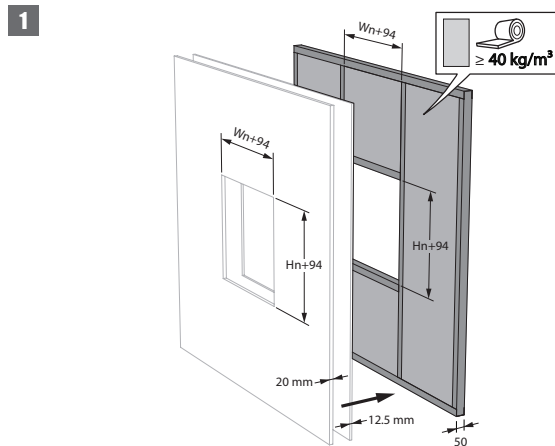

Maintenance

- No specific maintenance required.
- Schedule at least 2 visual checks each year.
- Remove dust and all other particles before use.
- Follow local maintenance regulations (i.e. BS9999 Annex V; NF S 61-933) and EN13306.
- Read the maintenance instructions on our website:
https://www.rft.eu/assets//PIM/DOCUMENTS/BROCHURE%20KITS/BRO_K139_MAINTENANCE_C.pdf
- Use the damper at up to 95% humidity, non-condensing.
- The fire damper can be cleaned with a dry or slightly damp cloth. It is forbidden to use abrasive cleaners or mechanical cleaning techniques (brush).


Operation and mechanisms



CFTH Mechanism with fusible link

The unlocking mechanism CFTH automatically unlatches the damper blade when the temperature in the duct rises above 72°C. The damper can also be unlocked and reset manually.

1. unlocking button
2. resetting handle
3. cable entrance

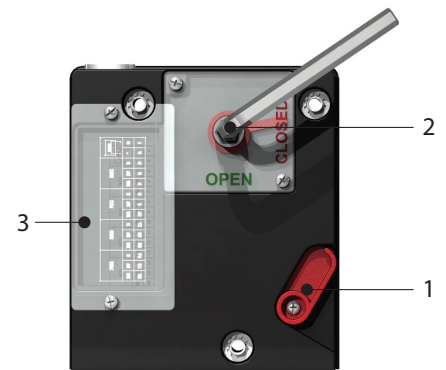

Options - at the time of order

FCU	Limit switch 'closed'
FDCU	Unipolar limit switch 'open/closed'
FDCB	Bipolar auxiliary limit switch 'open/closed'

Unlocking

- **manual unlocking:** use the unlocking button (1).
- **automatic unlocking:** when the fusible link melts at 72° C.
- **remote unlocking:** n/a

Resetting

- **manual resetting:** use the enclosed Hex key and turn clockwise(2).
- **motorised resetting:** n/a

Caution:


- ▲ The mechanism may never be tested on its own, without being attached to the damper. Such a test might damage the mechanism or the operator might be injured.



ONE Spring return actuator for remote control

The spring-return actuator ONE is designed to easily operate Rf-t fire dampers of all sizes, automatically or remotely. Six models are available, 24 or 230 volt, with FDCU or FDCB position switches; and optionally with plug (ST).

1. unlocking button
2. blade position indicator
3. LED
4. battery compartment to reset motor

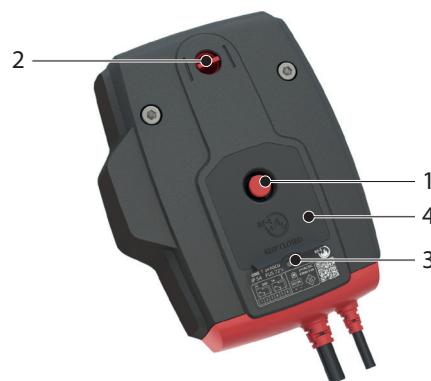

Unlocking

- **manual unlocking:** shortly press the unlocking button (1) once.
- **automatic unlocking:** the fusible link reacts as soon as the temperature in the duct reaches 72°C.
- **remote unlocking:** by interrupting the power supply.

Resetting

- **manual resetting:** open the battery compartment (4) and press a 9V battery against the contact springs. Hold this position until the LED (3) emits a continuous light.
Check whether the indicator (2) shows that the damper blade is in the open position.
Remove the battery, the LED fades away.
Close the battery compartment.
- **motorised resetting:** switch off the power supply for at least 5 sec. Power the actuator (respect the prescribed voltage) for at least 75 sec. The resetting stops automatically when the end of range is reached (damper open).

Caution:

- ⚠ If the LED (3) flickers fast (3x/sec.), the battery is discharged: use a new battery.
- ⚠ If the LED (3) flickers slowly (1x/sec), the resetting is in progress.
- ⚠ If the LED (3) is continuously on, the resetting is complete and the motor is powered.
- ⚠ If the actuator detects voltage on the power cable, a brief contact of the battery is enough to start the resetting process.
- ⚠ The power supply of this actuator cannot be individually replaced. If the cable is damaged, the whole unit must be discarded and replaced.
- ⚠ The housing of the mechanism contains a temperature sensor. When the temperature in the housing exceeds 72°C, the mechanism unlocks. The LED flashes twice per second. When the temperature drops below 72°C, the mechanism can only be reset in a motorised manner after a manual reset (with a battery).
- ⚠ The end of range switches need 1 second after operation to adopt a stable position.
- ⚠ Make sure the thermal trigger device is present in the actuator. The actuator might not function properly if this is not the case.


	prod. < 1/7/2015				prod. ≥ 1/7/2015			
	CR60(1s) CR120	CU-LT CU-LT-1s	CR2≤400 CU2≤1200	CR2>400 CU2>1200	CR60(1s) CR120(1s)	CU-LT CU-LT-1s	CR2≤400 CU2≤1200	CR2>400 CU2>1200
Kit ONE	●	●	●		●	●	●	●



ONE-X Spring return actuator with integrated communication module.

The ONE-X is a spring return actuator with integrated communication module designed to simply operate Rf-t fire dampers of all sizes, automatically or remotely. The ONE-X is available in two versions: 24 V and 230 V.

1. unlocking button
2. blade position indicator
3. LED red: status
4. battery compartment
5. LED blue: communication
6. LED orange: error message
7. supply
8. bus cable

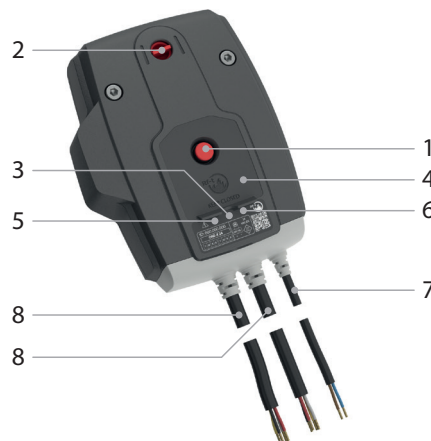

Unlocking

- **manual unlocking:** shortly press the unlocking button (1) once.
- **automatic unlocking:** the fusible link reacts as soon as the temperature in the duct reaches 72°C.
- **remote unlocking:** via ZENiX controller

Resetting

- **manual resetting:** Open the battery compartment (4) and press a 9V battery against the contact springs. Hold this position until the red LED (3) emits a continuous light. Control whether the indicator (2) indicates that the damper blade is open. Remove the battery. Close the battery compartment.
- **motorised resetting:** via ZENiX controller. By applying voltage during first use.

Caution:

- ⚠ If the ONE-X detects voltage on the power cable, a brief contact of the battery is enough to start the resetting process, provided the ZENiX controller has sent the damper to open position or the ONE-X is being operated for the first time.
- ⚠ The power supply of this actuator cannot be individually replaced. If the cable is damaged, the whole unit must be discarded and replaced.
- ⚠ The housing of the mechanism contains a temperature sensor. When the temperature in the housing exceeds 72°C, the mechanism unlocks. The LED flashes twice per second. When the temperature drops below 72°C, the mechanism can only be reset in a motorised manner after a manual reset (with a battery).
- ⚠ The end of range switches need 1 second after operation to adopt a stable position.

Safety regulations:


- ⚠ Do not use the ONE-X for any application other than the specified applications, in particular not in aircraft or other airborne vehicles.
- ⚠ The company that purchases and/or installs the ONE-X is fully responsible for the correct operation of the entire system. Only authorised specialists may perform the installation. All rules and regulations, including statutory regulations, must be observed during installation.
- ⚠ This device contains electrical or electronic components and must not be disposed of as household waste. All locally applicable regulations and requirements must be strictly observed.



BFL(T) Remotely controlled spring return actuator

The spring return actuator BFL(T) is especially designed to operate fire dampers remotely. The BFL(T) variant is intended for fire dampers with smaller dimensions (CR60, CR120, CR2 with $\varnothing \leq 400$ mm, CRS60 with $\varnothing \leq 315$ mm, CU2 / CU2-15 / CU4 with $W+H \leq 1200$ mm or for CU-LT and CU-LT-1s). For Markage FD with $H = 200$ mm or $H = 2200$ mm (in combination with BFT motor).

1. locking button
2. plug (ST)
3. access for manual resetting
4. thermo-electric tripping device (T)

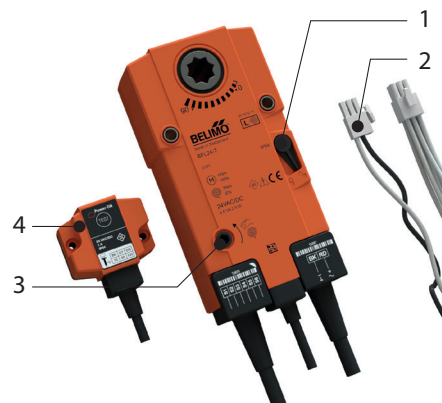

Options - at the time of order

SN2 BFL/BFN Auxiliary limit switch 'open/closed'

Unlocking

- **manual unlocking:** place the locking button on "unlock". (In case of BFLT: the damper can alternatively be unlocked by pushing the "test" button on the thermo-electric fuse)
- **automatic unlocking:** the thermo-electric fuse reacts as soon as the temperature reaches 72°C (type BFLT).
- **remote unlocking:** by interrupting the power supply.

Caution:

- ⚠ The thermo-electric fuse will not move the damper into its safety position (when the temperature reaches 72°C) if the motor is not powered.

Resetting

- **manual resetting:** turn the enclosed handle anti-clockwise. To block the motor, place the locking button on "lock"
- **motorised resetting:** switch off the power supply for at least 10 seconds. Supply the actuator (respect the prescribed voltage) for at least 75 seconds. The resetting stops automatically when the end of range is reached (damper open) - it takes about 60 seconds to reset the damper - or when the power supply is interrupted.

Caution:

- ⚠ Do not use a drill or powered screwdriver.
- ⚠ Stop as soon as the motor is completely rearmed (end of range).


	prod. < 1/7/2015				prod. ≥ 1/7/2015			
	CR60(1s) CR120	CU-LT CU-LT-1S	CR2≤400 CU2≤1200	CR2>400 CU2>1200	CR60(1s) CR120 (1s)	CU-LT CU-LT-1S	CR2≤400 CU2≤1200	CR2>400 CU2>1200
Kit BFL					•	•	•	
Kit BFN	•	•	•					•
Kit BF				•				



BFN(T) Remotely controlled spring return actuator

The spring return actuator BFN(T) is especially designed to operate fire dampers remotely. The BFN(T) variant is intended for fire dampers with large dimensions (CRE60, CR2 with $\varnothing > 400$ mm, CRS60 with $\varnothing > 315$ mm or CU2, CU2-15, CU4 with $W+H > 1200$ mm. For Markage FD with H of 400 and 600 mm or with H = 1200 mm (2 pcs) and with H = 2400 mm (in combination with BFT motor).

1. locking button
2. plug (ST)
3. access for manual resetting
4. thermo-electric tripping device (T)

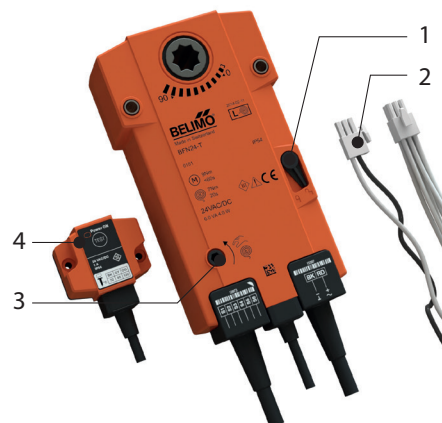

Options - at the time of order

SN2 BFL/BFN Auxiliary limit switch 'open/closed'

Unlocking

- **manual unlocking:** place the locking button on "unlock". (In case of BFNT: the damper can alternatively be unlocked by pushing the "test" button on the thermo-electric fuse)
- **automatic unlocking:** the thermo-electric fuse reacts as soon as the temperature reaches 72°C (type BFNT).
- **remote unlocking:** by interrupting the power supply.

Caution:

- ⚠ The thermo-electric fuse will not move the damper into its safety position (when the temperature reaches 72°C) if the motor is not powered.

Resetting

- **manual resetting:** turn the enclosed handle anti-clockwise. To block the motor, place the locking button on "lock"
- **motorised resetting:** switch off the power supply for at least 10 seconds. Supply the actuator (respect the prescribed voltage) for at least 75 seconds. The resetting stops automatically when the end of range is reached (damper open) - it takes about 60 seconds to reset the damper - or when the power supply is interrupted.

Caution:

- ⚠ Do not use a drill or powered screwdriver.
- ⚠ Stop as soon as the motor is completely rearmed (end of range).


	prod. < 1/7/2015				prod. ≥ 1/7/2015			
	CR60(1s) CR120	CU-LT CU-LT-1S	CR2≤400 CU2≤1200	CR2>400 CU2>1200	CR60(1s) CR120 (1s)	CU-LT CU-LT-1S	CR2≤400 CU2≤1200	CR2>400 CU2>1200
Kit BFL					•	•	•	
Kit BFN	•	•	•					•
Kit BF				•				



Ex (ROTORK-SCHISCHEK) Explosion proof (ATEX) motor RMEX(T)

Explosion proof (ATEX) motor • Zone 2/22: low risk of explosion <10h/year of explosive environment

1. access for manual resetting
2. thermo-electric tripping device (T)
3. switch S (selection of the running time)

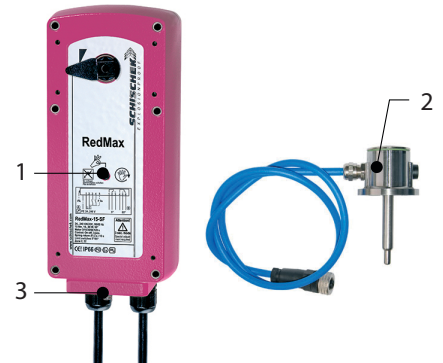

Unlocking

- **manual unlocking:** n.a.
- **automatic unlocking:** as soon as the reaction temperature (72°C) of the thermo-electric tripping device is reached (Type RMEXT).
- **remote unlocking:** by interrupting the power supply.

Caution:

- ▲ Selection of running time spring return: the running time of 3 or 10 sec. spring return is selected by wiring (see electrical connection).

Resetting

- **manual resetting:** use the delivered socket wrench, turn in slow motion and apply enough torque/force.
- **motorised resetting:** supply the actuator (respect the prescribed voltage) for at least 60 sec. The resetting stops automatically.

Caution:

- ▲ Selection of running time (resetting): place the switch (S) into the correct/selected position in accordance to the details below. The selected parameter will work at next operation of the actuator. Adjustment can be done even without supply voltage.
- ▲ 3 sec./90°: S=00; 15 sec./90°: S=01; 30 sec./90°: S=02; 60 sec./90°: S=03; 120 sec./90°: S=04
- ▲ If the motor is powered, turn the switch only if the actuator is not running !

Caution:


- ▲ The mechanism may never be tested on its own, without being attached to the damper. Such a test might damage the mechanism or the operator might be injured.



Ex (ROTORK-SCHISCHEK) Explosion proof (ATEX) motor EMEX(T)

Explosion proof (ATEX) motor for different risk areas:• Zone 1/21: average risk of explosion >100h/year explosive environment• Zone 2/22: low risk of explosion <10h/year of explosive environment

1. access for manual resetting
2. thermo-electric tripping device (T)
3. switch S (selection of the running time)

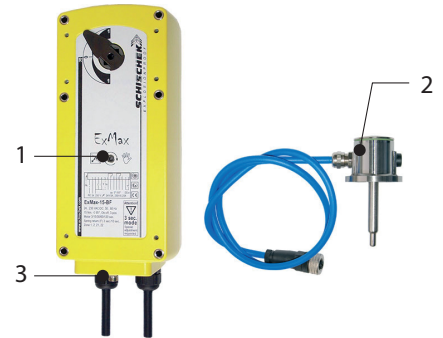

Unlocking

- **manual unlocking:** n.a.
- **automatic unlocking:** as soon as the reaction temperature (72°C) of the thermo-electric tripping device is reached (Type EMEXT).
- **remote unlocking:** by interrupting the power supply.

Caution:

- ▲ Selection of running time spring return: the running time of 3 or 10 sec. spring return is selected by wiring (see electrical connection).

Resetting

- **manual resetting:** use the delivered socket wrench, turn in slow motion and apply enough torque/force.
- **motorised resetting:** supply the actuator (respect the prescribed voltage) for at least 60 sec. The resetting stops automatically.

Caution:


- ▲ Selection of running time (resetting): place the switch (S) into the correct/selected position in accordance to the details below. The selected parameter will work at next operation of the actuator. Adjustment can be done even without supply voltage.
- ▲ 3 sec./90°: S=00; 15 sec./90°: S=01; 30 sec./90°: S=02; 60 sec./90°: S=03; 120 sec./90°: S=04
- ▲ If the motor is powered, turn the switch only if the actuator is not running !

Caution:

- ▲ The mechanism may never be tested on its own, without being attached to the damper. Such a test might damage the mechanism or the operator might be injured.


Electrical connection

CFTH

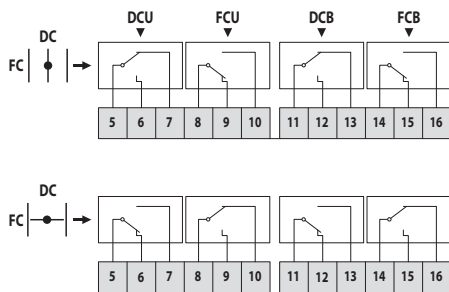


DC: Switch open position fire damper
FC: Switch closed position fire damper

ONE

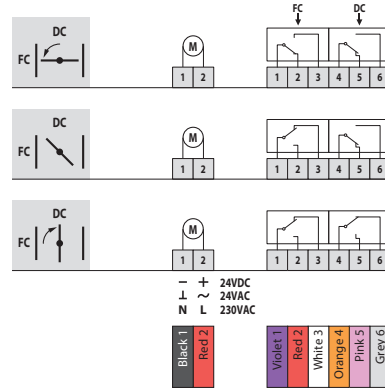


DC: Switch open position fire damper
FC: Switch closed position fire damper

ONE-X

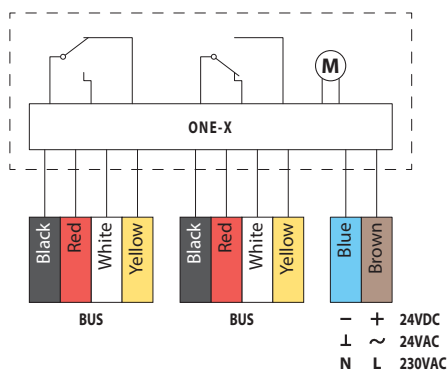


DC: Switch open position fire damper
FC: Switch closed position fire damper

BFL(T)

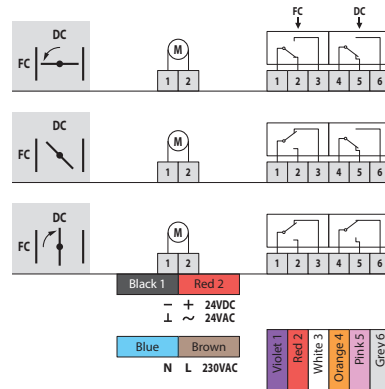


BFN(T)

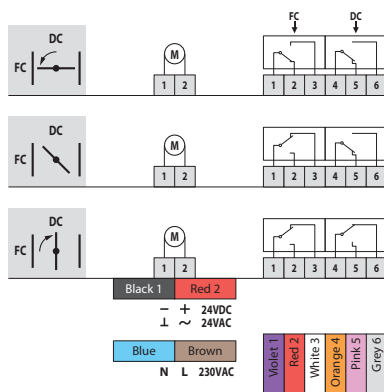

DC: Switch open position fire damper
FC: Switch closed position fire damper

Ex (ROTORK-SCHISCHEK)

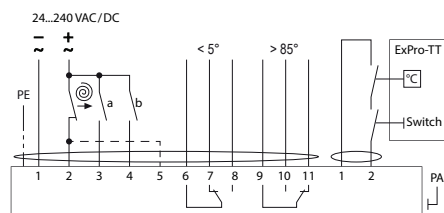

MEC	Nominal voltage motor	Nominal voltage magnet	Power consumption (stand-by)	Power consumption (operating)	Standard switches	Resetting time motor
CFTH	N/A	N/A	N/A	N/A	1mA...6A, DC 5V...AC 250V	N/A
ONE T 24 FDCU	24 V AC/DC (-10/+20%)	N/A	0,28 W	4,2 W	1mA...1A 60VDC or 1mA...100mA 230VAC	< 75 s (cabled) / <85 s (battery)
ONE T 24 FDCU ST	24 V AC/DC (-10/+20%)	N/A	0,28 W	4,2 W	1mA...1A 60VDC or 1mA...100mA 230VAC	< 75 s (cabled) / <85 s (battery)
ONE T 230 FDCU	230 V AC (-15/+15%)	N/A	0,57 W	4,2 W	1mA...1A 60VDC or 1mA...100mA 230VAC	< 75 s (cabled) / <85 s (battery)
ONE T 230 FDCU ST	230 V AC (-15/+15%)	N/A	0,57 W	4,2 W	1mA...1A 60VDC or 1mA...100mA 230VAC	< 75 s (cabled) / <85 s (battery)
ONE T 24 FDCB	24 V AC/DC (-10/+20%)	N/A	0,28 W	4,2 W	1mA...1A 60VDC	< 75 s (cabled) / <85 s (battery)
ONE T 230 FDCB	230 V AC (-15/+15%)	N/A	0,57 W	4,2 W	1mA...1A 60VDC	< 75 s (cabled) / <85 s (battery)
ONE-X 24	24 V AC/DC (-10/+20%)	N/A	0,28 W	4,2 W		< 75 s (cabled) / <85 s (battery)
ONE-X 230	230 V AC (-15/+15%)	N/A	0,57 W	4,2 W		< 75 s (cabled) / <85 s (battery)
BFL24	24 V AC/DC	N/A	0,7 W	2,5 W	1mA...3A, AC 250V	< 60 s
BFL24-ST	24 V AC/DC	N/A	0,7 W	2,5 W	1mA...3A, AC 250V	< 60 s
BFL230	230 V AC	N/A	0,9 W	3 W	1mA...3A, AC 250V	< 60 s
BFLT24	24 V AC/DC	N/A	0,8 W	2,5 W	1mA...3A, AC 250V	< 60 s
BFLT24-ST	24 V AC/DC	N/A	0,8 W	2,5 W	1mA...3A, AC 250V	< 60 s
BFLT230	230 V AC	N/A	1,1 W	3,5 W	1mA...3A, AC 250V	< 60 s
BFLT230-ST	230 V AC	N/A	1,1 W	3,5 W	1mA...3A, AC 250V	< 60 s
BFN24	24 V AC/DC	N/A	1,4 W	4 W	1mA...3A, AC 250V	< 60 s
BFN24-ST	24 V AC/DC	N/A	1,4 W	4 W	1mA...3A, AC 250V	< 60 s
BFN230	230 V AC	N/A	2 W	4,5 W	1mA...3A, AC 250V	< 60 s
BFNT24	24 V AC/DC	N/A	1,4 W	4 W	1mA...3A, AC 250V	< 60 s
BFNT24-ST	24 V AC/DC	N/A	1,4 W	4 W	1mA...3A, AC 250V	< 60 s
BFNT230	230 V AC	N/A	2,1 W	5 W	1mA...3A, AC 250V	< 60 s
BFNT230-ST	230 V AC	N/A	2,1 W	5 W	1mA...3A, AC 250V	< 60 s
RMEX	24...230 V AC / DC	N/A	5 W	20 W	max. 24V/3A, 230V/0,25A	3/15/30/60/120s
RMEXT	24...230 V AC / DC	N/A	5 W	20 W	max. 24V/3A, 230V/0,25A	3/15/30/60/120s
EMEX	24...230 V AC / DC	N/A	5 W	20 W	max. 24V/3A, 230V/0,25A	3/15/30/60/120s
EMEXT	24...230 V AC / DC	N/A	5 W	20 W	max. 24V/3A, 230V/0,25A	3/15/30/60/120s

MEC	Running time spring	Noise level motor	Noise level spring	Cable supply / control	Cable auxiliary switch	Protection class
CFTH	1 s	N/A	N/A			IP 42
ONE T 24 FDCU	< 30 s	< 64 dB (A)	< 67 dB (A)	1 m, 2 x 0.75 mm ² (halogen-free)	1 m, 6 x 0.75 mm ² (halogen-free)	IP 54
ONE T 24 FDCU ST	< 30 s	< 64 dB (A)	< 67 dB (A)	1 m, 2 x 0.75 mm ² (halogen-free)	1 m, 6 x 0.75 mm ² (halogen-free)	IP 54
ONE T 230 FDCU	< 30 s	< 64 dB (A)	< 67 dB (A)	1 m, 2 x 0.75 mm ² (halogen-free)	1 m, 6 x 0.75 mm ² (halogen-free)	IP 54
ONE T 230 FDCU ST	< 30 s	< 64 dB (A)	< 67 dB (A)	1 m, 2 x 0.75 mm ² (halogen-free)	1 m, 6 x 0.75 mm ² (halogen-free)	IP 54
ONE T 24 FDCB	< 30 s	< 64 dB (A)	< 67 dB (A)	1 m, 2 x 0.75 mm ² (halogen-free)	(2x) 1 m, 6 x 0,75 mm ² (halogen-free)	IP 54
ONE T 230 FDCB	< 30 s	< 64 dB (A)	< 67 dB (A)	1 m, 2 x 0.75 mm ² (halogen-free)	(2x) 1 m, 6 x 0,75 mm ² (halogen-free)	IP 54
ONE-X 24	< 30 s	< 64 dB (A)	< 67 dB (A)	1 m, 2 x 0.75 mm ² (halogen-free)	bus cable: (2x) 1 m, 4 x 0,75 mm ² (halogen-free)	IP 54
ONE-X 230	< 30 s	< 64 dB (A)	< 67 dB (A)	1 m, 2 x 0.75 mm ² (halogen-free)	bus cable: (2x) 1 m, 4 x 0,75 mm ² (halogen-free)	IP 54
BFL24	20 s	< 43 dB (A)	< 62 dB (A)	1 m, 2 x 0.75 mm ² (halogen-free)	1 m, 6 x 0.75 mm ² (halogen-free)	IP 54
BFL24-ST	20 s	< 43 dB (A)	< 62 dB (A)	1 m, 2 x 0.75 mm ² (halogen-free)	1 m, 6 x 0.75 mm ² (halogen-free)	IP 54
BFL230	20 s	< 43 dB (A)	< 62 dB (A)	1 m, 2 x 0.75 mm ² (halogen-free)	1 m, 6 x 0.75 mm ² (halogen-free)	IP 54
BFLT24	20 s	< 43 dB (A)	< 62 dB (A)	1 m, 2 x 0.75 mm ² (halogen-free)	1 m, 6 x 0.75 mm ² (halogen-free)	IP 54
BFLT24-ST	20 s	< 43 dB (A)	< 62 dB (A)	1 m, 2 x 0.75 mm ² (halogen-free)	1 m, 6 x 0.75 mm ² (halogen-free)	IP 54
BFLT230	20 s	< 43 dB (A)	< 62 dB (A)	1 m, 2 x 0.75 mm ² (halogen-free)	1 m, 6 x 0.75 mm ² (halogen-free)	IP 54
BFLT230-ST	20 s	< 43 dB (A)	< 62 dB (A)	1 m, 2 x 0.75 mm ² (halogen-free)	1 m, 6 x 0.75 mm ² (halogen-free)	IP 54
BFN24	20 s	≤ 55 dB (A)	ca. 67 dB (A)	1 m, 2 x 0.75 mm ² (halogen-free)	1 m, 6 x 0.75 mm ² (halogen-free)	IP 54
BFN24-ST	20 s	≤ 55 dB (A)	ca. 67 dB (A)	1 m, 2 x 0.75 mm ² (halogen-free)	1 m, 6 x 0.75 mm ² (halogen-free)	IP 54
BFN230	20 s	≤ 55 dB (A)	ca. 67 dB (A)	1 m, 2 x 0.75 mm ² (halogen-free)	1 m, 6 x 0.75 mm ² (halogen-free)	IP 54
BFNT24	20 s	≤ 55 dB (A)	ca. 67 dB (A)	1 m, 2 x 0.75 mm ² (halogen-free)	1 m, 6 x 0.75 mm ² (halogen-free)	IP 54
BFNT24-ST	20 s	≤ 55 dB (A)	ca. 67 dB (A)	1 m, 2 x 0.75 mm ² (halogen-free)	1 m, 6 x 0.75 mm ² (halogen-free)	IP 54
BFNT230	20 s	≤ 55 dB (A)	ca. 67 dB (A)	1 m, 2 x 0.75 mm ² (halogen-free)	1 m, 6 x 0.75 mm ² (halogen-free)	IP 54
BFNT230-ST	20 s	≤ 55 dB (A)	ca. 67 dB (A)	1 m, 2 x 0.75 mm ² (halogen-free)	1 m, 6 x 0.75 mm ² (halogen-free)	IP 54
RMEX	3/10 s					IP 66
RMEXT	3/10 s					IP 66
EMEX	3/10 s					IP 66
EMEXT	3/10 s					IP 66

Weights

CU2 + CFTH

Hn\Wn (mm)		200	250	300	350	400	450	500	550	600	650	700	750	800	850	900
200	kg	10,8	11,9	12,9	14,0	15,0	16,1	17,1	18,2	19,3	20,3	21,4	22,4	23,5	24,5	25,6
250	kg	11,8	12,9	14,0	15,2	16,3	17,4	18,5	19,7	20,8	21,9	23,0	24,2	25,3	26,4	27,5
300	kg	12,8	14,0	15,2	16,4	17,6	18,7	19,9	21,1	22,3	23,5	24,7	25,9	27,1	28,3	29,4
350	kg	13,8	15,1	16,3	17,6	18,8	20,1	21,3	22,6	23,8	25,1	26,3	27,6	28,9	30,1	29,8
400	kg	14,8	16,1	17,5	18,8	20,1	21,4	22,7	24,0	25,4	26,7	28,0	29,3	30,6	30,4	31,7
450	kg	15,8	17,2	18,6	20,0	21,4	22,7	24,1	25,5	26,9	28,3	29,7	31,0	30,8	32,2	33,6
500	kg	16,8	18,3	19,7	21,2	22,6	24,1	25,5	27,0	28,4	29,9	31,3	31,2	32,6	34,1	35,5
550	kg	17,8	19,3	20,9	22,4	23,9	25,4	26,9	28,4	29,9	31,5	31,4	32,9	34,4	35,9	37,4
600	kg	18,8	20,4	22,0	23,6	25,2	26,7	28,3	29,9	31,5	31,5	33,0	34,6	36,2	37,8	39,3
650	kg	19,8	21,5	23,1	24,8	26,4	28,1	29,7	31,4	31,4	33,0	34,7	36,3	38,0	39,6	41,3
700	kg	20,8	22,6	24,3	26,0	27,7	29,4	31,1	31,2	32,9	34,6	36,3	38,1	39,8	41,5	43,2
750	kg	21,9	23,6	25,4	27,2	29,0	30,7	30,9	32,7	34,5	36,2	38,0	39,8	41,6	43,3	45,1
800	kg	22,9	24,7	26,5	28,4	30,2	30,5	32,3	34,1	36,0	37,8	39,7	41,5	43,3	45,2	47,0
850	kg	23,9	25,8	27,7	29,6	29,9	31,8	33,7	35,6	37,5	39,4	41,3	43,2	45,1	47,0	48,9
900	kg	24,9	26,8	28,8	29,2	31,2	33,1	35,1	37,1	39,0	41,0	43,0	44,9	46,9	48,9	50,9
950	kg	25,9	27,9	28,3	30,4	32,4	34,5	36,5	38,5	40,6	42,6	44,6	46,7	48,7	50,7	52,8
1000	kg	26,9	27,4	29,5	31,6	33,7	35,8	37,9	40,0	42,1	44,2	46,3	48,4	50,5	52,6	54,7

Hn\Wn (mm)		950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500			
200	kg	26,7	27,7	27,2	28,2	29,3	30,3	31,4	32,5	33,5	34,6	35,6	36,7			
250	kg	28,6	28,2	29,3	30,4	31,5	32,7	33,8	34,9	36,0	37,1	38,3	39,4			
300	kg	29,0	30,2	31,4	32,6	33,8	35,0	36,2	37,3	38,5	39,7	40,9	42,1			
350	kg	31,0	32,3	33,5	34,8	36,0	37,3	38,5	39,8	41,0	42,3	43,5	44,8			
400	kg	33,0	34,3	35,6	36,9	38,3	39,6	40,9	42,2	43,5	44,9	46,2	47,5			
450	kg	35,0	36,4	37,7	39,1	40,5	41,9	43,3	44,7	46,0	47,4	48,8	50,2			
500	kg	37,0	38,4	39,9	41,3	42,8	44,2	45,7	47,1	48,6	50,0	51,4	52,9			
550	kg	38,9	40,5	42,0	43,5	45,0	46,5	48,0	49,5	51,1	52,6	54,1	-			
600	kg	40,9	42,5	44,1	45,7	47,2	48,8	50,4	52,0	53,6	55,1	-	-			
650	kg	42,9	44,6	46,2	47,8	49,5	51,1	52,8	54,4	56,1	-	-	-			
700	kg	44,9	46,6	48,3	50,0	51,7	53,4	55,2	56,9	-	-	-	-			
750	kg	46,9	48,7	50,4	52,2	54,0	55,8	57,5	-	-	-	-	-			
800	kg	48,9	50,7	52,5	54,4	56,2	58,1	-	-	-	-	-	-			
850	kg	50,8	52,8	54,7	56,6	58,5	-	-	-	-	-	-	-			
900	kg	52,8	54,8	56,8	58,7	-	-	-	-	-	-	-	-			
950	kg	54,8	56,9	58,9	-	-	-	-	-	-	-	-	-			
1000	kg	56,8	58,9	-	-	-	-	-	-	-	-	-	-			

CU2 + ONE

Hn\Wn (mm)		200	250	300	350	400	450	500	550	600	650	700	750	800	850	900
200	kg	11,6	12,7	13,7	14,8	15,8	16,9	17,9	19,0	20,1	21,1	22,2	23,2	24,3	25,3	26,4
250	kg	12,6	13,7	14,8	16,0	17,1	18,2	19,3	20,5	21,6	22,7	23,8	25,0	26,1	27,2	28,3
300	kg	13,6	14,8	16,0	17,2	18,4	19,5	20,7	21,9	23,1	24,3	25,5	26,7	27,9	29,1	30,2
350	kg	14,6	15,9	17,1	18,4	19,6	20,9	22,1	23,4	24,6	25,9	27,1	28,4	29,7	30,9	30,6
400	kg	15,6	16,9	18,3	19,6	20,9	22,2	23,5	24,8	26,2	27,5	28,8	30,1	31,4	31,2	32,5
450	kg	16,6	18,0	19,4	20,8	22,2	23,5	24,9	26,3	27,7	29,1	30,5	31,8	31,6	33,0	34,4
500	kg	17,6	19,1	20,5	22,0	23,4	24,9	26,3	27,8	29,2	30,7	32,1	32,0	33,4	34,9	36,3
550	kg	18,6	20,1	21,7	23,2	24,7	26,2	27,7	29,2	30,7	32,3	32,2	33,7	35,2	36,7	38,2
600	kg	19,6	21,2	22,8	24,4	26,0	27,5	29,1	30,7	32,3	32,3	33,8	35,4	37,0	38,6	40,1
650	kg	20,6	22,3	23,9	25,6	27,2	28,9	30,5	32,2	32,2	33,8	35,5	37,1	38,8	40,4	42,1
700	kg	21,6	23,4	25,1	26,8	28,5	30,2	31,9	32,0	33,7	35,4	37,1	38,9	40,6	42,3	44,0
750	kg	22,7	24,4	26,2	28,0	29,8	31,5	31,7	33,5	35,3	37,0	38,8	40,6	42,4	44,1	45,9
800	kg	23,7	25,5	27,3	29,2	31,0	31,3	33,1	34,9	36,8	38,6	40,5	42,3	44,1	46,0	47,8
850	kg	24,7	26,6	28,5	30,4	30,7	32,6	34,5	36,4	38,3	40,2	42,1	44,0	45,9	47,8	49,7
900	kg	25,7	27,6	29,6	30,0	32,0	33,9	35,9	37,9	39,8	41,8	43,8	45,7	47,7	49,7	51,7
950	kg	26,7	28,7	29,1	31,2	33,2	35,3	37,3	39,3	41,4	43,4	45,4	47,5	49,5	51,5	53,6
1000	kg	27,7	28,2	30,3	32,4	34,5	36,6	38,7	40,8	42,9	45,0	47,1	49,2	51,3	53,4	55,5

Hn\Wn (mm)		950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500			
200	kg	27,5	28,5	28,0	29,0	30,1	31,1	32,2	33,3	34,3	35,4	36,4	37,5			
250	kg	29,4	29,0	30,1	31,2	32,3	33,5	34,6	35,7	36,8	37,9	39,1	40,2			
300	kg	29,8	31,0	32,2	33,4	34,6	35,8	37,0	38,1	39,3	40,5	41,7	42,9			
350	kg	31,8	33,1	34,3	35,6	36,8	38,1	39,3	40,6	41,8	43,1	44,3	45,6			
400	kg	33,8	35,1	36,4	37,7	39,1	40,4	41,7	43,0	44,3	45,7	47,0	48,3			
450	kg	35,8	37,2	38,5	39,9	41,3	42,7	44,1	45,5	46,8	48,2	49,6	51,0			
500	kg	37,8	39,2	40,7	42,1	43,6	45,0	46,5	47,9	49,4	50,8	52,2	53,7			
550	kg	39,7	41,3	42,8	44,3	45,8	47,3	48,8	50,3	51,9	53,4	54,9	56,4			
600	kg	41,7	43,3	44,9	46,5	48,0	49,6	51,2	52,8	54,4	55,9	57,5	59,1			
650	kg	43,7	45,4	47,0	48,6	50,3	51,9	53,6	55,2	56,9	58,5	60,2	61,8			
700	kg	45,7	47,4	49,1	50,8	52,5	54,2	56,0	57,7	59,4	61,1	62,8	64,5			
750	kg	47,7	49,5	51,2	53,0	54,8	56,6	58,3	60,1	61,9	63,7	65,4	67,2			
800	kg	49,7	51,5	53,3	55,2	57,0	58,9	60,7	62,5	64,4	66,2	68,1	69,9			
850	kg	51,6	53,6	55,5	57,4	59,3	61,2	63,1	65,0	66,9	68,8	70,7	72,6			
900	kg	53,6	55,6	57,6	59,5	61,5	63,5	65,5	67,4	69,4	71,4	73,3	75,3			
950	kg	55,6	57,7	59,7	61,7	63,8	65,8	67,8	69,9	71,9	73,9	76,0	78,0			
1000	kg	57,6	59,7	61,8	63,9	66,0	68,1	70,2	72,3	74,4	76,5	78,6	80,7			

CU2 + BFL

Hn\Wn [mm]		200	250	300	350	400	450	500	550	600	650	700	750	800	850	900
200	kg	10,8	11,9	13,0	14,0	15,1	16,1	17,2	18,2	19,3	20,4	21,4	22,5	23,5	24,6	25,7
250	kg	11,9	13,0	14,1	15,2	16,3	17,5	18,6	19,7	20,8	22,0	23,1	24,2	25,3	26,4	27,6
300	kg	12,9	14,0	15,2	16,4	17,6	18,8	20,0	21,2	22,4	23,5	24,7	25,9	27,1	28,3	29,5
350	kg	13,9	15,1	16,4	17,6	18,9	20,1	21,4	22,6	23,9	25,1	26,4	27,6	28,9	30,2	-
400	kg	14,9	16,2	17,5	18,8	20,1	21,5	22,8	24,1	25,4	26,7	28,1	29,4	30,7	-	-
450	kg	15,9	17,3	18,6	20,0	21,4	22,8	24,2	25,6	26,9	28,3	29,7	31,1	-	-	-
500	kg	16,9	18,3	19,8	21,2	22,7	24,1	25,6	27,0	28,5	29,9	31,4	-	-	-	-
550	kg	17,9	19,4	20,9	22,4	23,9	25,5	27,0	28,5	30,0	31,5	-	-	-	-	-
600	kg	18,9	20,5	22,0	23,6	25,2	26,8	28,4	29,9	31,5	-	-	-	-	-	-
650	kg	19,9	21,5	23,2	24,8	26,5	28,1	29,8	31,4	-	-	-	-	-	-	-
700	kg	20,9	22,6	24,3	26,0	27,7	29,4	31,2	-	-	-	-	-	-	-	-
750	kg	21,9	23,7	25,5	27,2	29,0	30,8	-	-	-	-	-	-	-	-	-
800	kg	22,9	24,7	26,6	28,4	30,3	-	-	-	-	-	-	-	-	-	-
850	kg	23,9	25,8	27,7	29,6	-	-	-	-	-	-	-	-	-	-	-
900	kg	24,9	26,9	28,9	-	-	-	-	-	-	-	-	-	-	-	-
950	kg	25,9	28,0	-	-	-	-	-	-	-	-	-	-	-	-	-
1000	kg	26,9	-	-	-	-	-	-	-	-	-	-	-	-	-	-

Hn\Wn [mm]		950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500			
200	kg	26,7	27,8	-	-	-	-	-	-	-	-	-	-			
250	kg	28,7	-	-	-	-	-	-	-	-	-	-	-			
300	kg	-	-	-	-	-	-	-	-	-	-	-	-			
350	kg	-	-	-	-	-	-	-	-	-	-	-	-			
400	kg	-	-	-	-	-	-	-	-	-	-	-	-			
450	kg	-	-	-	-	-	-	-	-	-	-	-	-			
500	kg	-	-	-	-	-	-	-	-	-	-	-	-			
550	kg	-	-	-	-	-	-	-	-	-	-	-	-			
600	kg	-	-	-	-	-	-	-	-	-	-	-	-			
650	kg	-	-	-	-	-	-	-	-	-	-	-	-			
700	kg	-	-	-	-	-	-	-	-	-	-	-	-			
750	kg	-	-	-	-	-	-	-	-	-	-	-	-			
800	kg	-	-	-	-	-	-	-	-	-	-	-	-			
850	kg	-	-	-	-	-	-	-	-	-	-	-	-			
900	kg	-	-	-	-	-	-	-	-	-	-	-	-			
950	kg	-	-	-	-	-	-	-	-	-	-	-	-			
1000	kg	-	-	-	-	-	-	-	-	-	-	-	-			

CU2 + BFLT

Hn\Wn (mm)		200	250	300	350	400	450	500	550	600	650	700	750	800	850	900
200	kg	10,9	12,0	13,1	14,1	15,2	16,2	17,3	18,3	19,4	20,5	21,5	22,6	23,6	24,7	25,8
250	kg	12,0	13,1	14,2	15,3	16,4	17,6	18,7	19,8	20,9	22,1	23,2	24,3	25,4	26,5	27,7
300	kg	13,0	14,1	15,3	16,5	17,7	18,9	20,1	21,3	22,5	23,6	24,8	26,0	27,2	28,4	29,6
350	kg	14,0	15,2	16,5	17,7	19,0	20,2	21,5	22,7	24,0	25,2	26,5	27,7	29,0	30,3	-
400	kg	15,0	16,3	17,6	18,9	20,2	21,6	22,9	24,2	25,5	26,8	28,2	29,5	30,8	-	-
450	kg	16,0	17,4	18,7	20,1	21,5	22,9	24,3	25,7	27,0	28,4	29,8	31,2	-	-	-
500	kg	17,0	18,4	19,9	21,3	22,8	24,2	25,7	27,1	28,6	30,0	31,5	-	-	-	-
550	kg	18,0	19,5	21,0	22,5	24,0	25,6	27,1	28,6	30,1	31,6	-	-	-	-	-
600	kg	19,0	20,6	22,1	23,7	25,3	26,9	28,5	30,0	31,6	-	-	-	-	-	-
650	kg	20,0	21,6	23,3	24,9	26,6	28,2	29,9	31,5	-	-	-	-	-	-	-
700	kg	21,0	22,7	24,4	26,1	27,8	29,5	31,3	-	-	-	-	-	-	-	-
750	kg	22,0	23,8	25,6	27,3	29,1	30,9	-	-	-	-	-	-	-	-	-
800	kg	23,0	24,8	26,7	28,5	30,4	-	-	-	-	-	-	-	-	-	-
850	kg	24,0	25,9	27,8	29,7	-	-	-	-	-	-	-	-	-	-	-
900	kg	25,0	27,0	29,0	-	-	-	-	-	-	-	-	-	-	-	-
950	kg	26,0	28,1	-	-	-	-	-	-	-	-	-	-	-	-	-
1000	kg	27,0	-	-	-	-	-	-	-	-	-	-	-	-	-	-

Hn\Wn (mm)		950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500			
200	kg	26,8	27,9	-	-	-	-	-	-	-	-	-	-			
250	kg	28,8	-	-	-	-	-	-	-	-	-	-	-			
300	kg	-	-	-	-	-	-	-	-	-	-	-	-			
350	kg	-	-	-	-	-	-	-	-	-	-	-	-			
400	kg	-	-	-	-	-	-	-	-	-	-	-	-			
450	kg	-	-	-	-	-	-	-	-	-	-	-	-			
500	kg	-	-	-	-	-	-	-	-	-	-	-	-			
550	kg	-	-	-	-	-	-	-	-	-	-	-	-			
600	kg	-	-	-	-	-	-	-	-	-	-	-	-			
650	kg	-	-	-	-	-	-	-	-	-	-	-	-			
700	kg	-	-	-	-	-	-	-	-	-	-	-	-			
750	kg	-	-	-	-	-	-	-	-	-	-	-	-			
800	kg	-	-	-	-	-	-	-	-	-	-	-	-			
850	kg	-	-	-	-	-	-	-	-	-	-	-	-			
900	kg	-	-	-	-	-	-	-	-	-	-	-	-			
950	kg	-	-	-	-	-	-	-	-	-	-	-	-			
1000	kg	-	-	-	-	-	-	-	-	-	-	-	-			

CU2 + BFN

Hn\Wn (mm)		200	250	300	350	400	450	500	550	600	650	700	750	800	850	900
200	kg	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
250	kg	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
300	kg	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
350	kg	-	-	-	-	-	-	-	-	-	-	-	-	-	-	30,1
400	kg	-	-	-	-	-	-	-	-	-	-	-	-	-	30,7	32,0
450	kg	-	-	-	-	-	-	-	-	-	-	-	-	31,2	32,6	33,9
500	kg	-	-	-	-	-	-	-	-	-	-	31,5	33,0	34,4	35,9	
550	kg	-	-	-	-	-	-	-	-	-	31,7	33,2	34,8	36,3	37,8	
600	kg	-	-	-	-	-	-	-	-	-	31,8	33,4	35,0	36,5	38,1	39,7
650	kg	-	-	-	-	-	-	-	-	31,8	33,4	35,0	36,7	38,3	40,0	41,6
700	kg	-	-	-	-	-	-	-	31,6	33,3	35,0	36,7	38,4	40,1	41,8	43,5
750	kg	-	-	-	-	-	-	31,3	33,0	34,8	36,6	38,4	40,1	41,9	43,7	45,5
800	kg	-	-	-	-	-	30,8	32,7	34,5	36,3	38,2	40,0	41,9	43,7	45,5	47,4
850	kg	-	-	-	-	30,2	32,1	34,0	36,0	37,9	39,8	41,7	43,6	45,5	47,4	49,3
900	kg	-	-	-	29,5	31,5	33,5	35,4	37,4	39,4	41,4	43,3	45,3	47,3	49,2	51,2
950	kg	-	-	28,7	30,7	32,8	34,8	36,8	38,9	40,9	42,9	45,0	47,0	49,1	51,1	53,1
1000	kg	-	27,7	29,8	31,9	34,0	36,1	38,2	40,3	42,4	44,5	46,6	48,7	50,8	52,9	55,0

Hn\Wn (mm)		950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500			
200	kg	-	-	27,5	28,6	29,6	30,7	31,8	32,8	33,9	34,9	36,0	37,0			
250	kg	-	28,5	29,6	30,8	31,9	33,0	34,1	35,2	36,4	37,5	38,6	39,7			
300	kg	29,4	30,6	31,8	32,9	34,1	35,3	36,5	37,7	38,9	40,1	41,3	42,4			
350	kg	31,4	32,6	33,9	35,1	36,4	37,6	38,9	40,1	41,4	42,6	43,9	45,1			
400	kg	33,3	34,7	36,0	37,3	38,6	39,9	41,3	42,6	43,9	45,2	46,5	47,8			
450	kg	35,3	36,7	38,1	39,5	40,9	42,2	43,6	45,0	46,4	47,8	49,2	50,5			
500	kg	37,3	38,8	40,2	41,7	43,1	44,6	46,0	47,5	48,9	50,4	51,8	53,2			
550	kg	39,3	40,8	42,3	43,8	45,4	46,9	48,4	49,9	51,4	52,9	54,4	55,9			
600	kg	41,3	42,9	44,4	46,0	47,6	49,2	50,8	52,3	53,9	55,5	57,1	58,7			
650	kg	43,3	44,9	46,6	48,2	49,8	51,5	53,1	54,8	56,4	58,1	59,7	61,4			
700	kg	45,2	47,0	48,7	50,4	52,1	53,8	55,5	57,2	58,9	60,6	62,3	64,1			
750	kg	47,2	49,0	50,8	52,6	54,3	56,1	57,9	59,7	61,4	63,2	65,0	66,8			
800	kg	49,2	51,1	52,9	54,7	56,6	58,4	60,3	62,1	63,9	65,8	67,6	69,5			
850	kg	51,2	53,1	55,0	56,9	58,8	60,7	62,6	64,5	66,4	68,3	70,3	72,2			
900	kg	53,2	55,2	57,1	59,1	61,1	63,0	65,0	67,0	68,9	70,9	72,9	74,9			
950	kg	55,2	57,2	59,2	61,3	63,3	65,3	67,4	69,4	71,5	73,5	75,5	77,6			
1000	kg	57,1	59,3	61,4	63,5	65,6	67,7	69,8	71,9	74,0	76,1	78,2	80,3			

CU2 + BFNT

Hn\Wn (mm)		200	250	300	350	400	450	500	550	600	650	700	750	800	850	900
200	kg	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
250	kg	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
300	kg	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
350	kg	-	-	-	-	-	-	-	-	-	-	-	-	-	-	30,2
400	kg	-	-	-	-	-	-	-	-	-	-	-	-	-	30,8	32,1
450	kg	-	-	-	-	-	-	-	-	-	-	-	-	31,3	32,7	34,0
500	kg	-	-	-	-	-	-	-	-	-	-	31,6	33,1	34,5	36,0	
550	kg	-	-	-	-	-	-	-	-	-	31,8	33,3	34,9	36,4	37,9	
600	kg	-	-	-	-	-	-	-	-	-	31,9	33,5	35,1	36,6	38,2	39,8
650	kg	-	-	-	-	-	-	-	-	31,9	33,5	35,1	36,8	38,4	40,1	41,7
700	kg	-	-	-	-	-	-	-	31,7	33,4	35,1	36,8	38,5	40,2	41,9	43,6
750	kg	-	-	-	-	-	-	31,4	33,1	34,9	36,7	38,5	40,2	42,0	43,8	45,6
800	kg	-	-	-	-	-	30,9	32,8	34,6	36,4	38,3	40,1	42,0	43,8	45,6	47,5
850	kg	-	-	-	-	30,3	32,2	34,1	36,1	38,0	39,9	41,8	43,7	45,6	47,5	49,4
900	kg	-	-	-	29,6	31,6	33,6	35,5	37,5	39,5	41,5	43,4	45,4	47,4	49,3	51,3
950	kg	-	-	28,8	30,8	32,9	34,9	36,9	39,0	41,0	43,0	45,1	47,1	49,2	51,2	53,2
1000	kg	-	27,8	29,9	32,0	34,1	36,2	38,3	40,4	42,5	44,6	46,7	48,8	50,9	53,0	55,1

Hn\Wn (mm)		950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500			
200	kg	-	-	27,6	28,7	29,7	30,8	31,9	32,9	34,0	35,0	36,1	37,1			
250	kg	-	28,6	29,7	30,9	32,0	33,1	34,2	35,3	36,5	37,6	38,7	39,8			
300	kg	29,5	30,7	31,9	33,0	34,2	35,4	36,6	37,8	39,0	40,2	41,4	42,5			
350	kg	31,5	32,7	34,0	35,2	36,5	37,7	39,0	40,2	41,5	42,7	44,0	45,2			
400	kg	33,4	34,8	36,1	37,4	38,7	40,0	41,4	42,7	44,0	45,3	46,6	47,9			
450	kg	35,4	36,8	38,2	39,6	41,0	42,3	43,7	45,1	46,5	47,9	49,3	50,6			
500	kg	37,4	38,9	40,3	41,8	43,2	44,7	46,1	47,6	49,0	50,5	51,9	53,3			
550	kg	39,4	40,9	42,4	43,9	45,5	47,0	48,5	50,0	51,5	53,0	54,5	56,0			
600	kg	41,4	43,0	44,5	46,1	47,7	49,3	50,9	52,4	54,0	55,6	57,2	58,8			
650	kg	43,4	45,0	46,7	48,3	49,9	51,6	53,2	54,9	56,5	58,2	59,8	61,5			
700	kg	45,3	47,1	48,8	50,5	52,2	53,9	55,6	57,3	59,0	60,7	62,4	64,2			
750	kg	47,3	49,1	50,9	52,7	54,4	56,2	58,0	59,8	61,5	63,3	65,1	66,9			
800	kg	49,3	51,2	53,0	54,8	56,7	58,5	60,4	62,2	64,0	65,9	67,7	69,6			
850	kg	51,3	53,2	55,1	57,0	58,9	60,8	62,7	64,6	66,5	68,4	70,4	72,3			
900	kg	53,3	55,3	57,2	59,2	61,2	63,1	65,1	67,1	69,0	71,0	73,0	75,0			
950	kg	55,3	57,3	59,3	61,4	63,4	65,4	67,5	69,5	71,6	73,6	75,6	77,7			
1000	kg	57,2	59,4	61,5	63,6	65,7	67,8	69,9	72,0	74,1	76,2	78,3	80,4			

CU2-L500 + CFTH

Hn\Wn [mm]		200	250	300	350	400	450	500	550	600	650	700	750	800	850	900
200	kg	11,6	12,8	13,9	15,1	16,2	17,4	18,6	19,7	20,9	22,0	23,2	24,3	25,5	26,6	27,8
250	kg	12,7	14,0	15,2	16,4	17,6	18,9	20,1	21,3	22,5	23,8	25,0	26,2	27,4	28,7	29,9
300	kg	13,8	15,1	16,4	17,7	19,0	20,3	21,6	22,9	24,2	25,5	26,8	28,1	29,4	30,7	32,0
350	kg	14,9	16,3	17,7	19,0	20,4	21,8	23,1	24,5	25,9	27,2	28,6	30,0	31,4	32,7	32,3
400	kg	16,0	17,5	18,9	20,3	21,8	23,2	24,7	26,1	27,5	29,0	30,4	31,9	33,3	33,0	34,4
450	kg	17,1	18,6	20,1	21,7	23,2	24,7	26,2	27,7	29,2	30,7	32,2	33,7	33,5	35,0	36,5
500	kg	18,2	19,8	21,4	23,0	24,6	26,1	27,7	29,3	30,9	32,5	34,0	33,9	35,5	37,0	38,6
550	kg	19,3	21,0	22,6	24,3	25,9	27,6	29,2	30,9	32,5	34,2	34,1	35,8	37,4	39,1	40,7
600	kg	20,4	22,1	23,9	25,6	27,3	29,0	30,8	32,5	34,2	34,2	35,9	37,6	39,4	41,1	42,8
650	kg	21,5	23,3	25,1	26,9	28,7	30,5	32,3	34,1	34,1	35,9	37,7	39,5	41,3	43,1	44,9
700	kg	22,6	24,5	26,3	28,2	30,1	31,9	33,8	33,9	35,8	37,7	39,5	41,4	43,3	45,1	47,0
750	kg	23,7	25,6	27,6	29,5	31,5	33,4	33,6	35,5	37,5	39,4	41,4	43,3	45,2	47,2	49,1
800	kg	24,8	26,8	28,8	30,8	32,9	33,1	35,1	37,1	39,1	41,2	43,2	45,2	47,2	49,2	51,2
850	kg	25,9	28,0	30,1	32,2	32,5	34,6	36,6	38,7	40,8	42,9	45,0	47,1	49,1	51,2	53,3
900	kg	27,0	29,2	31,3	31,7	33,9	36,0	38,2	40,3	42,5	44,6	46,8	48,9	51,1	53,3	55,4
950	kg	28,1	30,3	30,8	33,0	35,2	37,5	39,7	41,9	44,2	46,4	48,6	50,8	53,0	55,3	57,5
1000	kg	29,2	29,8	32,0	34,3	36,6	38,9	41,2	43,5	45,8	48,1	50,4	52,7	55,0	57,3	59,6

Hn\Wn [mm]		950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500			
200	kg	29,0	30,1	29,5	30,7	31,8	33,0	34,1	35,3	36,4	37,6	38,8	39,9			
250	kg	31,1	30,6	31,8	33,1	34,3	35,5	36,7	38,0	39,2	40,4	41,6	42,9			
300	kg	31,5	32,8	34,1	35,4	36,7	38,0	39,3	40,6	41,9	43,2	44,5	45,8			
350	kg	33,7	35,1	36,4	37,8	39,2	40,6	41,9	43,3	44,7	46,0	47,4	48,8			
400	kg	35,9	37,3	38,8	40,2	41,6	43,1	44,5	46,0	47,4	48,8	50,3	51,7			
450	kg	38,0	39,6	41,1	42,6	44,1	45,6	47,1	48,6	50,1	51,6	53,2	54,7			
500	kg	40,2	41,8	43,4	45,0	46,5	48,1	49,7	51,3	52,9	54,5	56,0	57,6			
550	kg	42,4	44,0	45,7	47,3	49,0	50,7	52,3	54,0	55,6	57,3	58,9	-			
600	kg	44,5	46,3	48,0	49,7	51,4	53,2	54,9	56,6	58,4	60,1	-	-			
650	kg	46,7	48,5	50,3	52,1	53,9	55,7	57,5	59,3	61,1	-	-	-			
700	kg	48,9	50,7	52,6	54,5	56,4	58,2	60,1	62,0	-	-	-	-			
750	kg	51,1	53,0	54,9	56,9	58,8	60,7	62,7	-	-	-	-	-			
800	kg	53,2	55,2	57,2	59,2	61,3	63,3	-	-	-	-	-	-			
850	kg	55,4	57,5	59,5	61,6	63,7	-	-	-	-	-	-	-			
900	kg	57,6	59,7	61,9	64,0	-	-	-	-	-	-	-	-			
950	kg	59,7	61,9	64,2	-	-	-	-	-	-	-	-	-			
1000	kg	61,9	64,2	-	-	-	-	-	-	-	-	-	-			

CU2-L500 + ONE

Hn\Wn (mm)		200	250	300	350	400	450	500	550	600	650	700	750	800	850	900
200	kg	12,4	13,6	14,7	15,9	17,0	18,2	19,4	20,5	21,7	22,8	24,0	25,1	26,3	27,4	28,6
250	kg	13,5	14,8	16,0	17,2	18,4	19,7	20,9	22,1	23,3	24,6	25,8	27,0	28,2	29,5	30,7
300	kg	14,6	15,9	17,2	18,5	19,8	21,1	22,4	23,7	25,0	26,3	27,6	28,9	30,2	31,5	32,8
350	kg	15,7	17,1	18,5	19,8	21,2	22,6	23,9	25,3	26,7	28,0	29,4	30,8	32,2	33,5	33,1
400	kg	16,8	18,3	19,7	21,1	22,6	24,0	25,5	26,9	28,3	29,8	31,2	32,7	34,1	33,8	35,2
450	kg	17,9	19,4	20,9	22,5	24,0	25,5	27,0	28,5	30,0	31,5	33,0	34,5	34,3	35,8	37,3
500	kg	19,0	20,6	22,2	23,8	25,4	26,9	28,5	30,1	31,7	33,3	34,8	34,7	36,3	37,8	39,4
550	kg	20,1	21,8	23,4	25,1	26,7	28,4	30,0	31,7	33,3	35,0	34,9	36,6	38,2	39,9	41,5
600	kg	21,2	22,9	24,7	26,4	28,1	29,8	31,6	33,3	35,0	35,0	36,7	38,4	40,2	41,9	43,6
650	kg	22,3	24,1	25,9	27,7	29,5	31,3	33,1	34,9	34,9	36,7	38,5	40,3	42,1	43,9	45,7
700	kg	23,4	25,3	27,1	29,0	30,9	32,7	34,6	34,7	36,6	38,5	40,3	42,2	44,1	45,9	47,8
750	kg	24,5	26,4	28,4	30,3	32,3	34,2	34,4	36,3	38,3	40,2	42,2	44,1	46,0	48,0	49,9
800	kg	25,6	27,6	29,6	31,6	33,7	33,9	35,9	37,9	39,9	42,0	44,0	46,0	48,0	50,0	52,0
850	kg	26,7	28,8	30,9	33,0	33,3	35,4	37,4	39,5	41,6	43,7	45,8	47,9	49,9	52,0	54,1
900	kg	27,8	30,0	32,1	32,5	34,7	36,8	39,0	41,1	43,3	45,4	47,6	49,7	51,9	54,1	56,2
950	kg	28,9	31,1	31,6	33,8	36,0	38,3	40,5	42,7	45,0	47,2	49,4	51,6	53,8	56,1	58,3
1000	kg	30,0	30,6	32,8	35,1	37,4	39,7	42,0	44,3	46,6	48,9	51,2	53,5	55,8	58,1	60,4

Hn\Wn (mm)		950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500			
200	kg	29,8	30,9	30,3	31,5	32,6	33,8	34,9	36,1	37,2	38,4	39,6	40,7			
250	kg	31,9	31,4	32,6	33,9	35,1	36,3	37,5	38,8	40,0	41,2	42,4	43,7			
300	kg	32,3	33,6	34,9	36,2	37,5	38,8	40,1	41,4	42,7	44,0	45,3	46,6			
350	kg	34,5	35,9	37,2	38,6	40,0	41,4	42,7	44,1	45,5	46,8	48,2	49,6			
400	kg	36,7	38,1	39,6	41,0	42,4	43,9	45,3	46,8	48,2	49,6	51,1	52,5			
450	kg	38,8	40,4	41,9	43,4	44,9	46,4	47,9	49,4	50,9	52,4	54,0	55,5			
500	kg	41,0	42,6	44,2	45,8	47,3	48,9	50,5	52,1	53,7	55,3	56,8	58,4			
550	kg	43,2	44,8	46,5	48,1	49,8	51,5	53,1	54,8	56,4	58,1	59,7	61,4			
600	kg	45,3	47,1	48,8	50,5	52,2	54,0	55,7	57,4	59,2	60,9	62,6	64,3			
650	kg	47,5	49,3	51,1	52,9	54,7	56,5	58,3	60,1	61,9	63,7	65,5	67,3			
700	kg	49,7	51,5	53,4	55,3	57,2	59,0	60,9	62,8	64,6	66,5	68,4	70,2			
750	kg	51,9	53,8	55,7	57,7	59,6	61,5	63,5	65,4	67,4	69,3	71,2	73,2			
800	kg	54,0	56,0	58,0	60,0	62,1	64,1	66,1	68,1	70,1	72,1	74,1	76,1			
850	kg	56,2	58,3	60,3	62,4	64,5	66,6	68,7	70,8	72,8	74,9	77,0	79,1			
900	kg	58,4	60,5	62,7	64,8	67,0	69,1	71,3	73,4	75,6	77,7	79,9	82,0			
950	kg	60,5	62,7	65,0	67,2	69,4	71,6	73,9	76,1	78,3	80,5	82,8	85,0			
1000	kg	62,7	65,0	67,3	69,6	71,9	74,2	76,5	78,8	81,1	83,4	85,6	87,9			

CU2-L500 + BFL

Hn\Wn (mm)		200	250	300	350	400	450	500	550	600	650	700	750	800	850	900
200	kg	11,7	12,8	14,0	15,2	16,3	17,5	18,6	19,8	20,9	22,1	23,2	24,4	25,5	26,7	27,9
250	kg	12,8	14,0	15,2	16,5	17,7	18,9	20,1	21,4	22,6	23,8	25,0	26,3	27,5	28,7	29,9
300	kg	13,9	15,2	16,5	17,8	19,1	20,4	21,7	23,0	24,3	25,6	26,9	28,2	29,5	30,8	32,0
350	kg	15,0	16,3	17,7	19,1	20,4	21,8	23,2	24,6	25,9	27,3	28,7	30,0	31,4	32,8	-
400	kg	16,1	17,5	19,0	20,4	21,8	23,3	24,7	26,2	27,6	29,0	30,5	31,9	33,4	-	-
450	kg	17,2	18,7	20,2	21,7	23,2	24,7	26,2	27,7	29,3	30,8	32,3	33,8	-	-	-
500	kg	18,3	19,8	21,4	23,0	24,6	26,2	27,8	29,4	30,9	32,5	34,1	-	-	-	-
550	kg	19,4	21,0	22,7	24,3	26,0	27,6	29,3	30,9	32,6	34,3	-	-	-	-	-
600	kg	20,5	22,2	23,9	25,6	27,4	29,1	30,8	32,5	34,3	-	-	-	-	-	-
650	kg	21,6	23,4	25,2	26,9	28,8	30,5	32,3	34,1	-	-	-	-	-	-	-
700	kg	22,7	24,5	26,4	28,3	30,1	32,0	33,9	-	-	-	-	-	-	-	-
750	kg	23,8	25,7	27,6	29,6	31,5	33,5	-	-	-	-	-	-	-	-	-
800	kg	24,9	26,9	28,9	30,9	32,9	-	-	-	-	-	-	-	-	-	-
850	kg	26,0	28,0	30,1	32,2	-	-	-	-	-	-	-	-	-	-	-
900	kg	27,0	29,2	31,4	-	-	-	-	-	-	-	-	-	-	-	-
950	kg	28,2	30,4	-	-	-	-	-	-	-	-	-	-	-	-	-
1000	kg	29,3	-	-	-	-	-	-	-	-	-	-	-	-	-	-

Hn\Wn (mm)		950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500			
200	kg	29,0	30,2	-	-	-	-	-	-	-	-	-	-			
250	kg	31,2	-	-	-	-	-	-	-	-	-	-	-			
300	kg	-	-	-	-	-	-	-	-	-	-	-	-			
350	kg	-	-	-	-	-	-	-	-	-	-	-	-			
400	kg	-	-	-	-	-	-	-	-	-	-	-	-			
450	kg	-	-	-	-	-	-	-	-	-	-	-	-			
500	kg	-	-	-	-	-	-	-	-	-	-	-	-			
550	kg	-	-	-	-	-	-	-	-	-	-	-	-			
600	kg	-	-	-	-	-	-	-	-	-	-	-	-			
650	kg	-	-	-	-	-	-	-	-	-	-	-	-			
700	kg	-	-	-	-	-	-	-	-	-	-	-	-			
750	kg	-	-	-	-	-	-	-	-	-	-	-	-			
800	kg	-	-	-	-	-	-	-	-	-	-	-	-			
850	kg	-	-	-	-	-	-	-	-	-	-	-	-			
900	kg	-	-	-	-	-	-	-	-	-	-	-	-			
950	kg	-	-	-	-	-	-	-	-	-	-	-	-			
1000	kg	-	-	-	-	-	-	-	-	-	-	-	-			

CU2-L500 + BFLT

Hn\Wn (mm)		200	250	300	350	400	450	500	550	600	650	700	750	800	850	900
200	kg	11,8	12,9	14,1	15,3	16,4	17,6	18,7	19,9	21,0	22,2	23,3	24,5	25,6	26,8	28,0
250	kg	12,9	14,1	15,3	16,6	17,8	19,0	20,2	21,5	22,7	23,9	25,1	26,4	27,6	28,8	30,0
300	kg	14,0	15,3	16,6	17,9	19,2	20,5	21,8	23,1	24,4	25,7	27,0	28,3	29,6	30,9	32,1
350	kg	15,1	16,4	17,8	19,2	20,5	21,9	23,3	24,7	26,0	27,4	28,8	30,1	31,5	32,9	-
400	kg	16,2	17,6	19,1	20,5	21,9	23,4	24,8	26,3	27,7	29,1	30,6	32,0	33,5	-	-
450	kg	17,3	18,8	20,3	21,8	23,3	24,8	26,3	27,8	29,4	30,9	32,4	33,9	-	-	-
500	kg	18,4	19,9	21,5	23,1	24,7	26,3	27,9	29,5	31,0	32,6	34,2	-	-	-	-
550	kg	19,5	21,1	22,8	24,4	26,1	27,7	29,4	31,0	32,7	34,4	-	-	-	-	-
600	kg	20,6	22,3	24,0	25,7	27,5	29,2	30,9	32,6	34,4	-	-	-	-	-	-
650	kg	21,7	23,5	25,3	27,0	28,9	30,6	32,4	34,2	-	-	-	-	-	-	-
700	kg	22,8	24,6	26,5	28,4	30,2	32,1	34,0	-	-	-	-	-	-	-	-
750	kg	23,9	25,8	27,7	29,7	31,6	33,6	-	-	-	-	-	-	-	-	-
800	kg	25,0	27,0	29,0	31,0	33,0	-	-	-	-	-	-	-	-	-	-
850	kg	26,1	28,1	30,2	32,3	-	-	-	-	-	-	-	-	-	-	-
900	kg	27,1	29,3	31,5	-	-	-	-	-	-	-	-	-	-	-	-
950	kg	28,3	30,5	-	-	-	-	-	-	-	-	-	-	-	-	-
1000	kg	29,4	-	-	-	-	-	-	-	-	-	-	-	-	-	-

Hn\Wn (mm)		950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500			
200	kg	29,1	30,3	-	-	-	-	-	-	-	-	-	-			
250	kg	31,3	-	-	-	-	-	-	-	-	-	-	-			
300	kg	-	-	-	-	-	-	-	-	-	-	-	-			
350	kg	-	-	-	-	-	-	-	-	-	-	-	-			
400	kg	-	-	-	-	-	-	-	-	-	-	-	-			
450	kg	-	-	-	-	-	-	-	-	-	-	-	-			
500	kg	-	-	-	-	-	-	-	-	-	-	-	-			
550	kg	-	-	-	-	-	-	-	-	-	-	-	-			
600	kg	-	-	-	-	-	-	-	-	-	-	-	-			
650	kg	-	-	-	-	-	-	-	-	-	-	-	-			
700	kg	-	-	-	-	-	-	-	-	-	-	-	-			
750	kg	-	-	-	-	-	-	-	-	-	-	-	-			
800	kg	-	-	-	-	-	-	-	-	-	-	-	-			
850	kg	-	-	-	-	-	-	-	-	-	-	-	-			
900	kg	-	-	-	-	-	-	-	-	-	-	-	-			
950	kg	-	-	-	-	-	-	-	-	-	-	-	-			
1000	kg	-	-	-	-	-	-	-	-	-	-	-	-			

CU2-L500 + BFN

Hn\Wn (mm)		200	250	300	350	400	450	500	550	600	650	700	750	800	850	900
200	kg	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
250	kg	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
300	kg	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
350	kg	-	-	-	-	-	-	-	-	-	-	-	-	-	-	32,7
400	kg	-	-	-	-	-	-	-	-	-	-	-	-	-	33,3	34,8
450	kg	-	-	-	-	-	-	-	-	-	-	-	-	33,9	35,4	36,9
500	kg	-	-	-	-	-	-	-	-	-	-	34,2	35,8	37,4	39,0	
550	kg	-	-	-	-	-	-	-	-	-	34,5	36,1	37,8	39,4	41,1	
600	kg	-	-	-	-	-	-	-	-	-	34,5	36,3	38,0	39,7	41,5	43,2
650	kg	-	-	-	-	-	-	-	-	34,5	36,3	38,1	39,9	41,7	43,5	45,3
700	kg	-	-	-	-	-	-	-	34,3	36,2	38,0	39,9	41,8	43,6	45,5	47,4
750	kg	-	-	-	-	-	-	33,9	35,9	37,8	39,8	41,7	43,6	45,6	47,5	49,5
800	kg	-	-	-	-	-	33,5	35,5	37,5	39,5	41,5	43,5	45,5	47,5	49,5	51,6
850	kg	-	-	-	-	32,8	34,9	37,0	39,1	41,2	43,2	45,3	47,4	49,5	51,6	53,7
900	kg	-	-	-	32,1	34,2	36,4	38,5	40,7	42,8	45,0	47,1	49,3	51,4	53,6	55,8
950	kg	-	-	31,1	33,4	35,6	37,8	40,1	42,3	44,5	46,7	48,9	51,2	53,4	55,6	57,8
1000	kg	-	30,1	32,4	34,7	37,0	39,3	41,6	43,9	46,2	48,5	50,8	53,1	55,3	57,6	59,9

Hn\Wn (mm)		950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500			
200	kg	-	-	29,9	31,0	32,2	33,3	34,5	35,6	36,8	38,0	39,1	40,3			
250	kg	-	31,0	32,2	33,4	34,6	35,9	37,1	38,3	39,5	40,8	42,0	43,2			
300	kg	31,9	33,2	34,5	35,8	37,1	38,4	39,7	41,0	42,3	43,6	44,9	46,2			
350	kg	34,1	35,4	36,8	38,2	39,5	40,9	42,3	43,6	45,0	46,4	47,8	49,1			
400	kg	36,2	37,7	39,1	40,5	42,0	43,4	44,9	46,3	47,8	49,2	50,6	52,1			
450	kg	38,4	39,9	41,4	42,9	44,4	46,0	47,5	49,0	50,5	52,0	53,5	55,0			
500	kg	40,6	42,2	43,7	45,3	46,9	48,5	50,1	51,6	53,2	54,8	56,4	58,0			
550	kg	42,7	44,4	46,0	47,7	49,4	51,0	52,7	54,3	56,0	57,6	59,3	60,9			
600	kg	44,9	46,6	48,3	50,1	51,8	53,5	55,3	57,0	58,7	60,4	62,2	63,9			
650	kg	47,1	48,9	50,7	52,5	54,3	56,0	57,9	59,6	61,4	63,2	65,0	66,8			
700	kg	49,2	51,1	53,0	54,8	56,7	58,6	60,4	62,3	64,2	66,0	67,9	69,8			
750	kg	51,4	53,3	55,3	57,2	59,2	61,1	63,0	65,0	66,9	68,9	70,8	72,7			
800	kg	53,6	55,6	57,6	59,6	61,6	63,6	65,6	67,6	69,6	71,7	73,7	75,7			
850	kg	55,7	57,8	59,9	62,0	64,1	66,1	68,2	70,3	72,4	74,5	76,6	78,6			
900	kg	57,9	60,1	62,2	64,4	66,5	68,7	70,8	73,0	75,1	77,3	79,4	81,6			
950	kg	60,1	62,3	64,5	66,7	69,0	71,2	73,4	75,6	77,9	80,1	82,3	84,5			
1000	kg	62,2	64,5	66,8	69,1	71,4	73,7	76,0	78,3	80,6	82,9	85,2	87,5			

CU2-L500 + BFNT

Hn\Wn (mm)		200	250	300	350	400	450	500	550	600	650	700	750	800	850	900
200	kg	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
250	kg	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
300	kg	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
350	kg	-	-	-	-	-	-	-	-	-	-	-	-	-	-	32,8
400	kg	-	-	-	-	-	-	-	-	-	-	-	-	-	33,4	34,9
450	kg	-	-	-	-	-	-	-	-	-	-	-	-	34,0	35,5	37,0
500	kg	-	-	-	-	-	-	-	-	-	-	34,3	35,9	37,5	39,1	
550	kg	-	-	-	-	-	-	-	-	-	34,6	36,2	37,9	39,5	41,2	
600	kg	-	-	-	-	-	-	-	-	-	34,6	36,4	38,1	39,8	41,6	43,3
650	kg	-	-	-	-	-	-	-	-	34,6	36,4	38,2	40,0	41,8	43,6	45,4
700	kg	-	-	-	-	-	-	-	34,4	36,3	38,1	40,0	41,9	43,7	45,6	47,5
750	kg	-	-	-	-	-	-	34,0	36,0	37,9	39,9	41,8	43,7	45,7	47,6	49,6
800	kg	-	-	-	-	-	33,6	35,6	37,6	39,6	41,6	43,6	45,6	47,6	49,6	51,7
850	kg	-	-	-	-	32,9	35,0	37,1	39,2	41,3	43,3	45,4	47,5	49,6	51,7	53,8
900	kg	-	-	-	32,2	34,3	36,5	38,6	40,8	42,9	45,1	47,2	49,4	51,5	53,7	55,9
950	kg	-	-	31,2	33,5	35,7	37,9	40,2	42,4	44,6	46,8	49,0	51,3	53,5	55,7	57,9
1000	kg	-	30,2	32,5	34,8	37,1	39,4	41,7	44,0	46,3	48,6	50,9	53,2	55,4	57,7	60,0

Hn\Wn (mm)		950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500			
200	kg	-	-	30,0	31,1	32,3	33,4	34,6	35,7	36,9	38,1	39,2	40,4			
250	kg	-	31,1	32,3	33,5	34,7	36,0	37,2	38,4	39,6	40,9	42,1	43,3			
300	kg	32,0	33,3	34,6	35,9	37,2	38,5	39,8	41,1	42,4	43,7	45,0	46,3			
350	kg	34,2	35,5	36,9	38,3	39,6	41,0	42,4	43,7	45,1	46,5	47,9	49,2			
400	kg	36,3	37,8	39,2	40,6	42,1	43,5	45,0	46,4	47,9	49,3	50,7	52,2			
450	kg	38,5	40,0	41,5	43,0	44,5	46,1	47,6	49,1	50,6	52,1	53,6	55,1			
500	kg	40,7	42,3	43,8	45,4	47,0	48,6	50,2	51,7	53,3	54,9	56,5	58,1			
550	kg	42,8	44,5	46,1	47,8	49,5	51,1	52,8	54,4	56,1	57,7	59,4	61,0			
600	kg	45,0	46,7	48,4	50,2	51,9	53,6	55,4	57,1	58,8	60,5	62,3	64,0			
650	kg	47,2	49,0	50,8	52,6	54,4	56,1	58,0	59,7	61,5	63,3	65,1	66,9			
700	kg	49,3	51,2	53,1	54,9	56,8	58,7	60,5	62,4	64,3	66,1	68,0	69,9			
750	kg	51,5	53,4	55,4	57,3	59,3	61,2	63,1	65,1	67,0	69,0	70,9	72,8			
800	kg	53,7	55,7	57,7	59,7	61,7	63,7	65,7	67,7	69,7	71,8	73,8	75,8			
850	kg	55,8	57,9	60,0	62,1	64,2	66,2	68,3	70,4	72,5	74,6	76,7	78,7			
900	kg	58,0	60,2	62,3	64,5	66,6	68,8	70,9	73,1	75,2	77,4	79,5	81,7			
950	kg	60,2	62,4	64,6	66,8	69,1	71,3	73,5	75,7	78,0	80,2	82,4	84,6			
1000	kg	62,3	64,6	66,9	69,2	71,5	73,8	76,1	78,4	80,7	83,0	85,3	87,6			

CU2 ATEX + RMEX

Hn\Wn (mm)		200	250	300	350	400	450	500	550	600	650	700	750	800	850	900
200	kg	14,8	15,8	16,9	18,0	19,0	20,1	21,1	22,2	23,2	24,3	25,4	26,4	27,5	28,5	29,6
250	kg	15,8	16,9	18,0	19,2	20,3	21,4	22,5	23,7	24,8	25,9	27,0	28,1	29,3	30,4	31,5
300	kg	16,8	18,0	19,2	20,4	21,5	22,7	23,9	25,1	26,3	27,5	28,7	29,9	31,1	32,2	33,4
350	kg	17,8	19,1	20,3	21,6	22,8	24,1	25,3	26,6	27,8	29,1	30,3	31,6	32,8	34,1	33,7
400	kg	18,8	20,1	21,4	22,8	24,1	25,4	26,7	28,0	29,4	30,7	32,0	33,3	34,6	34,3	35,7
450	kg	19,8	21,2	22,6	24,0	25,3	26,7	28,1	29,5	30,9	32,3	33,6	35,0	34,8	36,2	37,6
500	kg	20,8	22,3	23,7	25,2	26,6	28,1	29,5	31,0	32,4	33,9	35,3	35,2	36,6	38,1	39,5
550	kg	21,8	23,3	24,9	26,4	27,9	29,4	30,9	32,4	33,9	35,5	35,4	36,9	38,4	39,9	41,4
600	kg	22,8	24,4	26,0	27,6	29,1	30,7	32,3	33,9	35,5	35,4	37,0	38,6	40,2	41,8	43,3
650	kg	23,8	25,5	27,1	28,8	30,4	32,1	33,7	35,3	35,4	37,0	38,7	40,3	42,0	43,6	45,3
700	kg	24,8	26,5	28,3	30,0	31,7	33,4	35,1	35,2	36,9	38,6	40,3	42,0	43,8	45,5	47,2
750	kg	25,8	27,6	29,4	31,2	32,9	34,7	34,9	36,7	38,4	40,2	42,0	43,8	45,5	47,3	49,1
800	kg	26,8	28,7	30,5	32,4	34,2	34,5	36,3	38,1	40,0	41,8	43,7	45,5	47,3	49,2	51,0
850	kg	27,9	29,8	31,7	33,6	33,9	35,8	37,7	39,6	41,5	43,4	45,3	47,2	49,1	51,0	52,9
900	kg	28,9	30,8	32,8	33,2	35,1	37,1	39,1	41,1	43,0	45,0	47,0	48,9	50,9	52,9	54,9
950	kg	29,9	31,9	32,3	34,4	36,4	38,4	40,5	42,5	44,6	46,6	48,6	50,7	52,7	54,7	56,8
1000	kg	30,9	31,4	33,5	35,6	37,7	39,8	41,9	44,0	46,1	48,2	50,3	52,4	54,5	56,6	58,7

Hn\Wn (mm)		950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500			
200	kg	30,6	31,7	31,2	32,2	33,3	34,3	35,4	36,4	37,5	38,6	39,6	40,7			
250	kg	32,6	32,2	33,3	34,4	35,5	36,6	37,8	38,9	40,0	41,1	42,3	43,4			
300	kg	33,0	34,2	35,4	36,6	37,8	39,0	40,1	41,3	42,5	43,7	44,9	46,1			
350	kg	35,0	36,3	37,5	38,8	40,0	41,3	42,5	43,8	45,0	46,3	47,5	48,8			
400	kg	37,0	38,3	39,6	40,9	42,3	43,6	44,9	46,2	47,5	48,8	50,2	51,5			
450	kg	39,0	40,4	41,7	43,1	44,5	45,9	47,3	48,7	50,0	51,4	52,8	54,2			
500	kg	41,0	42,4	43,8	45,3	46,7	48,2	49,6	51,1	52,5	54,0	55,4	56,9			
550	kg	42,9	44,4	46,0	47,5	49,0	50,5	52,0	53,5	55,0	56,6	58,1	59,6			
600	kg	44,9	46,5	48,1	49,7	51,2	52,8	54,4	56,0	57,6	59,1	60,7	62,3			
650	kg	46,9	48,5	50,2	51,8	53,5	55,1	56,8	58,4	60,1	61,7	63,3	65,0			
700	kg	48,9	50,6	52,3	54,0	55,7	57,4	59,1	60,9	62,6	64,3	66,0	67,7			
750	kg	50,9	52,6	54,4	56,2	58,0	59,7	61,5	63,3	65,1	66,8	68,6	70,4			
800	kg	52,9	54,7	56,5	58,4	60,2	62,1	63,9	65,7	67,6	69,4	71,3	73,1			
850	kg	54,8	56,7	58,6	60,6	62,5	64,4	66,3	68,2	70,1	72,0	73,9	75,8			
900	kg	56,8	58,8	60,8	62,7	64,7	66,7	68,6	70,6	72,6	74,6	76,5	78,5			
950	kg	58,8	60,8	62,9	64,9	67,0	69,0	71,0	73,1	75,1	77,1	79,2	81,2			
1000	kg	60,8	62,9	65,0	67,1	69,2	71,3	73,4	75,5	77,6	79,7	81,8	83,9			

CU2 ATEX + RMEXT

Hn\Wn [mm]		200	250	300	350	400	450	500	550	600	650	700	750	800	850	900
200	kg	14,9	15,9	17,0	18,1	19,1	20,2	21,2	22,3	23,3	24,4	25,5	26,5	27,6	28,6	29,7
250	kg	15,9	17,0	18,1	19,3	20,4	21,5	22,6	23,8	24,9	26,0	27,1	28,2	29,4	30,5	31,6
300	kg	16,9	18,1	19,3	20,5	21,6	22,8	24,0	25,2	26,4	27,6	28,8	30,0	31,2	32,3	33,5
350	kg	17,9	19,2	20,4	21,7	22,9	24,2	25,4	26,7	27,9	29,2	30,4	31,7	32,9	34,2	33,8
400	kg	18,9	20,2	21,5	22,9	24,2	25,5	26,8	28,1	29,5	30,8	32,1	33,4	34,7	34,4	35,8
450	kg	19,9	21,3	22,7	24,1	25,4	26,8	28,2	29,6	31,0	32,4	33,7	35,1	34,9	36,3	37,7
500	kg	20,9	22,4	23,8	25,3	26,7	28,2	29,6	31,1	32,5	34,0	35,4	35,3	36,7	38,2	39,6
550	kg	21,9	23,4	25,0	26,5	28,0	29,5	31,0	32,5	34,0	35,6	35,5	37,0	38,5	40,0	41,5
600	kg	22,9	24,5	26,1	27,7	29,2	30,8	32,4	34,0	35,6	35,5	37,1	38,7	40,3	41,9	43,4
650	kg	23,9	25,6	27,2	28,9	30,5	32,2	33,8	35,4	35,5	37,1	38,8	40,4	42,1	43,7	45,4
700	kg	24,9	26,6	28,4	30,1	31,8	33,5	35,2	35,3	37,0	38,7	40,4	42,1	43,9	45,6	47,3
750	kg	25,9	27,7	29,5	31,3	33,0	34,8	35,0	36,8	38,5	40,3	42,1	43,9	45,6	47,4	49,2
800	kg	26,9	28,8	30,6	32,5	34,3	34,6	36,4	38,2	40,1	41,9	43,8	45,6	47,4	49,3	51,1
850	kg	28,0	29,9	31,8	33,7	34,0	35,9	37,8	39,7	41,6	43,5	45,4	47,3	49,2	51,1	53,0
900	kg	29,0	30,9	32,9	33,3	35,2	37,2	39,2	41,2	43,1	45,1	47,1	49,0	51,0	53,0	55,0
950	kg	30,0	32,0	32,4	34,5	36,5	38,5	40,6	42,6	44,7	46,7	48,7	50,8	52,8	54,8	56,9
1000	kg	31,0	31,5	33,6	35,7	37,8	39,9	42,0	44,1	46,2	48,3	50,4	52,5	54,6	56,7	58,8

Hn\Wn [mm]		950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500			
200	kg	30,7	31,8	31,3	32,3	33,4	34,4	35,5	36,5	37,6	38,7	39,7	40,8			
250	kg	32,7	32,3	33,4	34,5	35,6	36,7	37,9	39,0	40,1	41,2	42,4	43,5			
300	kg	33,1	34,3	35,5	36,7	37,9	39,1	40,2	41,4	42,6	43,8	45,0	46,2			
350	kg	35,1	36,4	37,6	38,9	40,1	41,4	42,6	43,9	45,1	46,4	47,6	48,9			
400	kg	37,1	38,4	39,7	41,0	42,4	43,7	45,0	46,3	47,6	48,9	50,3	51,6			
450	kg	39,1	40,5	41,8	43,2	44,6	46,0	47,4	48,8	50,1	51,5	52,9	54,3			
500	kg	41,1	42,5	43,9	45,4	46,8	48,3	49,7	51,2	52,6	54,1	55,5	57,0			
550	kg	43,0	44,5	46,1	47,6	49,1	50,6	52,1	53,6	55,1	56,7	58,2	59,7			
600	kg	45,0	46,6	48,2	49,8	51,3	52,9	54,5	56,1	57,7	59,2	60,8	62,4			
650	kg	47,0	48,6	50,3	51,9	53,6	55,2	56,9	58,5	60,2	61,8	63,4	65,1			
700	kg	49,0	50,7	52,4	54,1	55,8	57,5	59,2	61,0	62,7	64,4	66,1	67,8			
750	kg	51,0	52,7	54,5	56,3	58,1	59,8	61,6	63,4	65,2	66,9	68,7	70,5			
800	kg	53,0	54,8	56,6	58,5	60,3	62,2	64,0	65,8	67,7	69,5	71,4	73,2			
850	kg	54,9	56,8	58,7	60,7	62,6	64,5	66,4	68,3	70,2	72,1	74,0	75,9			
900	kg	56,9	58,9	60,9	62,8	64,8	66,8	68,7	70,7	72,7	74,7	76,6	78,6			
950	kg	58,9	60,9	63,0	65,0	67,1	69,1	71,1	73,2	75,2	77,2	79,3	81,3			
1000	kg	60,9	63,0	65,1	67,2	69,3	71,4	73,5	75,6	77,7	79,8	81,9	84,0			

CU2 ATEX + EMEX

Hn\Wn [mm]		200	250	300	350	400	450	500	550	600	650	700	750	800	850	900
200	kg	14,8	15,8	16,9	18,0	19,0	20,1	21,1	22,2	23,2	24,3	25,4	26,4	27,5	28,5	29,6
250	kg	15,8	16,9	18,0	19,2	20,3	21,4	22,5	23,7	24,8	25,9	27,0	28,1	29,3	30,4	31,5
300	kg	16,8	18,0	19,2	20,4	21,5	22,7	23,9	25,1	26,3	27,5	28,7	29,9	31,1	32,2	33,4
350	kg	17,8	19,1	20,3	21,6	22,8	24,1	25,3	26,6	27,8	29,1	30,3	31,6	32,8	34,1	33,7
400	kg	18,8	20,1	21,4	22,8	24,1	25,4	26,7	28,0	29,4	30,7	32,0	33,3	34,6	34,3	35,7
450	kg	19,8	21,2	22,6	24,0	25,3	26,7	28,1	29,5	30,9	32,3	33,6	35,0	34,8	36,2	37,6
500	kg	20,8	22,3	23,7	25,2	26,6	28,1	29,5	31,0	32,4	33,9	35,3	35,2	36,6	38,1	39,5
550	kg	21,8	23,3	24,9	26,4	27,9	29,4	30,9	32,4	33,9	35,5	35,4	36,9	38,4	39,9	41,4
600	kg	22,8	24,4	26,0	27,6	29,1	30,7	32,3	33,9	35,5	35,4	37,0	38,6	40,2	41,8	43,3
650	kg	23,8	25,5	27,1	28,8	30,4	32,1	33,7	35,3	35,4	37,0	38,7	40,3	42,0	43,6	45,3
700	kg	24,8	26,5	28,3	30,0	31,7	33,4	35,1	35,2	36,9	38,6	40,3	42,0	43,8	45,5	47,2
750	kg	25,8	27,6	29,4	31,2	32,9	34,7	34,9	36,7	38,4	40,2	42,0	43,8	45,5	47,3	49,1
800	kg	26,8	28,7	30,5	32,4	34,2	34,5	36,3	38,1	40,0	41,8	43,7	45,5	47,3	49,2	51,0
850	kg	27,9	29,8	31,7	33,6	33,9	35,8	37,7	39,6	41,5	43,4	45,3	47,2	49,1	51,0	52,9
900	kg	28,9	30,8	32,8	33,2	35,1	37,1	39,1	41,1	43,0	45,0	47,0	48,9	50,9	52,9	54,9
950	kg	29,9	31,9	32,3	34,4	36,4	38,4	40,5	42,5	44,6	46,6	48,6	50,7	52,7	54,7	56,8
1000	kg	30,9	31,4	33,5	35,6	37,7	39,8	41,9	44,0	46,1	48,2	50,3	52,4	54,5	56,6	58,7

Hn\Wn [mm]		950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500			
200	kg	30,6	31,7	31,2	32,2	33,3	34,3	35,4	36,4	37,5	38,6	39,6	40,7			
250	kg	32,6	32,2	33,3	34,4	35,5	36,6	37,8	38,9	40,0	41,1	42,3	43,4			
300	kg	33,0	34,2	35,4	36,6	37,8	39,0	40,1	41,3	42,5	43,7	44,9	46,1			
350	kg	35,0	36,3	37,5	38,8	40,0	41,3	42,5	43,8	45,0	46,3	47,5	48,8			
400	kg	37,0	38,3	39,6	40,9	42,3	43,6	44,9	46,2	47,5	48,8	50,2	51,5			
450	kg	39,0	40,4	41,7	43,1	44,5	45,9	47,3	48,7	50,0	51,4	52,8	54,2			
500	kg	41,0	42,4	43,8	45,3	46,7	48,2	49,6	51,1	52,5	54,0	55,4	56,9			
550	kg	42,9	44,4	46,0	47,5	49,0	50,5	52,0	53,5	55,0	56,6	58,1	59,6			
600	kg	44,9	46,5	48,1	49,7	51,2	52,8	54,4	56,0	57,6	59,1	60,7	62,3			
650	kg	46,9	48,5	50,2	51,8	53,5	55,1	56,8	58,4	60,1	61,7	63,3	65,0			
700	kg	48,9	50,6	52,3	54,0	55,7	57,4	59,1	60,9	62,6	64,3	66,0	67,7			
750	kg	50,9	52,6	54,4	56,2	58,0	59,7	61,5	63,3	65,1	66,8	68,6	70,4			
800	kg	52,9	54,7	56,5	58,4	60,2	62,1	63,9	65,7	67,6	69,4	71,3	73,1			
850	kg	54,8	56,7	58,6	60,6	62,5	64,4	66,3	68,2	70,1	72,0	73,9	75,8			
900	kg	56,8	58,8	60,8	62,7	64,7	66,7	68,6	70,6	72,6	74,6	76,5	78,5			
950	kg	58,8	60,8	62,9	64,9	67,0	69,0	71,0	73,1	75,1	77,1	79,2	81,2			
1000	kg	60,8	62,9	65,0	67,1	69,2	71,3	73,4	75,5	77,6	79,7	81,8	83,9			

CU2 ATEX + EMEXT

Hn\Wn (mm)		200	250	300	350	400	450	500	550	600	650	700	750	800	850	900
200	kg	14,9	15,9	17,0	18,1	19,1	20,2	21,2	22,3	23,3	24,4	25,5	26,5	27,6	28,6	29,7
250	kg	15,9	17,0	18,1	19,3	20,4	21,5	22,6	23,8	24,9	26,0	27,1	28,2	29,4	30,5	31,6
300	kg	16,9	18,1	19,3	20,5	21,6	22,8	24,0	25,2	26,4	27,6	28,8	30,0	31,2	32,3	33,5
350	kg	17,9	19,2	20,4	21,7	22,9	24,2	25,4	26,7	27,9	29,2	30,4	31,7	32,9	34,2	33,8
400	kg	18,9	20,2	21,5	22,9	24,2	25,5	26,8	28,1	29,5	30,8	32,1	33,4	34,7	34,4	35,8
450	kg	19,9	21,3	22,7	24,1	25,4	26,8	28,2	29,6	31,0	32,4	33,7	35,1	34,9	36,3	37,7
500	kg	20,9	22,4	23,8	25,3	26,7	28,2	29,6	31,1	32,5	34,0	35,4	35,3	36,7	38,2	39,6
550	kg	21,9	23,4	25,0	26,5	28,0	29,5	31,0	32,5	34,0	35,6	35,5	37,0	38,5	40,0	41,5
600	kg	22,9	24,5	26,1	27,7	29,2	30,8	32,4	34,0	35,6	35,5	37,1	38,7	40,3	41,9	43,4
650	kg	23,9	25,6	27,2	28,9	30,5	32,2	33,8	35,4	35,5	37,1	38,8	40,4	42,1	43,7	45,4
700	kg	24,9	26,6	28,4	30,1	31,8	33,5	35,2	35,3	37,0	38,7	40,4	42,1	43,9	45,6	47,3
750	kg	25,9	27,7	29,5	31,3	33,0	34,8	35,0	36,8	38,5	40,3	42,1	43,9	45,6	47,4	49,2
800	kg	26,9	28,8	30,6	32,5	34,3	34,6	36,4	38,2	40,1	41,9	43,8	45,6	47,4	49,3	51,1
850	kg	28,0	29,9	31,8	33,7	34,0	35,9	37,8	39,7	41,6	43,5	45,4	47,3	49,2	51,1	53,0
900	kg	29,0	30,9	32,9	33,3	35,2	37,2	39,2	41,2	43,1	45,1	47,1	49,0	51,0	53,0	55,0
950	kg	30,0	32,0	32,4	34,5	36,5	38,5	40,6	42,6	44,7	46,7	48,7	50,8	52,8	54,8	56,9
1000	kg	31,0	31,5	33,6	35,7	37,8	39,9	42,0	44,1	46,2	48,3	50,4	52,5	54,6	56,7	58,8

Hn\Wn (mm)		950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500			
200	kg	30,7	31,8	31,3	32,3	33,4	34,4	35,5	36,5	37,6	38,7	39,7	40,8			
250	kg	32,7	32,3	33,4	34,5	35,6	36,7	37,9	39,0	40,1	41,2	42,4	43,5			
300	kg	33,1	34,3	35,5	36,7	37,9	39,1	40,2	41,4	42,6	43,8	45,0	46,2			
350	kg	35,1	36,4	37,6	38,9	40,1	41,4	42,6	43,9	45,1	46,4	47,6	48,9			
400	kg	37,1	38,4	39,7	41,0	42,4	43,7	45,0	46,3	47,6	48,9	50,3	51,6			
450	kg	39,1	40,5	41,8	43,2	44,6	46,0	47,4	48,8	50,1	51,5	52,9	54,3			
500	kg	41,1	42,5	43,9	45,4	46,8	48,3	49,7	51,2	52,6	54,1	55,5	57,0			
550	kg	43,0	44,5	46,1	47,6	49,1	50,6	52,1	53,6	55,1	56,7	58,2	59,7			
600	kg	45,0	46,6	48,2	49,8	51,3	52,9	54,5	56,1	57,7	59,2	60,8	62,4			
650	kg	47,0	48,6	50,3	51,9	53,6	55,2	56,9	58,5	60,2	61,8	63,4	65,1			
700	kg	49,0	50,7	52,4	54,1	55,8	57,5	59,2	61,0	62,7	64,4	66,1	67,8			
750	kg	51,0	52,7	54,5	56,3	58,1	59,8	61,6	63,4	65,2	66,9	68,7	70,5			
800	kg	53,0	54,8	56,6	58,5	60,3	62,2	64,0	65,8	67,7	69,5	71,4	73,2			
850	kg	54,9	56,8	58,7	60,7	62,6	64,5	66,4	68,3	70,2	72,1	74,0	75,9			
900	kg	56,9	58,9	60,9	62,8	64,8	66,8	68,7	70,7	72,7	74,7	76,6	78,6			
950	kg	58,9	60,9	63,0	65,0	67,1	69,1	71,1	73,2	75,2	77,2	79,3	81,3			
1000	kg	60,9	63,0	65,1	67,2	69,3	71,4	73,5	75,6	77,7	79,8	81,9	84,0			

Selection data

$$\Delta p \text{ [Pa]} = \zeta^* v^2 * 0,6$$

Hn\Wn [mm]		200	250	300	350	400	450	500	550	600	650	700	750	800	850	900
200	ζ [-]	3,42	2,92	2,64	2,46	2,34	2,25	2,18	2,12	2,07	2,04	2,01	1,98	1,96	1,94	1,92
250	ζ [-]	1,91	1,58	1,39	1,27	1,19	1,13	1,08	1,05	1,02	0,99	0,97	0,96	0,94	0,93	0,92
300	ζ [-]	1,31	1,05	0,91	0,82	0,75	0,71	0,67	0,65	0,62	0,61	0,59	0,58	0,57	0,56	0,55
350	ζ [-]	1,01	0,79	0,66	0,59	0,54	0,5	0,47	0,45	0,43	0,42	0,41	0,4	0,39	0,38	0,37
400	ζ [-]	0,82	0,63	0,52	0,46	0,41	0,38	0,36	0,34	0,32	0,31	0,3	0,29	0,29	0,28	0,27
450	ζ [-]	0,7	0,53	0,43	0,37	0,33	0,31	0,28	0,27	0,26	0,24	0,24	0,23	0,22	0,22	0,21
500	ζ [-]	0,62	0,46	0,37	0,32	0,28	0,25	0,24	0,22	0,21	0,2	0,19	0,18	0,18	0,17	0,17
550	ζ [-]	0,56	0,41	0,32	0,27	0,24	0,22	0,2	0,19	0,18	0,17	0,16	0,15	0,15	0,14	0,14
600	ζ [-]	0,51	0,37	0,29	0,24	0,21	0,19	0,17	0,16	0,15	0,14	0,14	0,13	0,13	0,12	0,12
650	ζ [-]	0,47	0,34	0,26	0,22	0,19	0,17	0,15	0,14	0,13	0,13	0,12	0,11	0,11	0,11	0,1
700	ζ [-]	0,44	0,31	0,24	0,2	0,17	0,15	0,14	0,13	0,12	0,11	0,11	0,1	0,1	0,09	0,09
750	ζ [-]	0,42	0,29	0,23	0,18	0,16	0,14	0,13	0,12	0,11	0,1	0,1	0,09	0,09	0,08	0,08
800	ζ [-]	0,4	0,28	0,21	0,17	0,15	0,13	0,12	0,11	0,1	0,09	0,09	0,08	0,08	0,08	0,07
850	ζ [-]	0,38	0,26	0,2	0,16	0,14	0,12	0,11	0,1	0,09	0,08	0,08	0,08	0,07	0,07	0,07
900	ζ [-]	0,37	0,25	0,19	0,15	0,13	0,11	0,1	0,09	0,08	0,08	0,07	0,07	0,07	0,06	0,06
950	ζ [-]	0,36	0,24	0,18	0,14	0,12	0,11	0,09	0,08	0,08	0,07	0,07	0,06	0,06	0,06	0,06
1000	ζ [-]	0,34	0,23	0,17	0,14	0,12	0,1	0,09	0,08	0,07	0,07	0,06	0,06	0,06	0,05	0,05

Hn\Wn [mm]		950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500			
200	ζ [-]	1,9	1,89	1,88	1,86	1,85	1,84	1,84	1,83	1,82	1,81	1,81	1,8			
250	ζ [-]	0,91	0,9	0,89	0,88	0,88	0,87	0,87	0,86	0,86	0,85	0,85	0,85			
300	ζ [-]	0,54	0,54	0,53	0,53	0,52	0,52	0,51	0,51	0,51	0,5	0,5	0,5			
350	ζ [-]	0,37	0,36	0,36	0,35	0,35	0,35	0,34	0,34	0,34	0,33	0,33	0,33			
400	ζ [-]	0,27	0,26	0,26	0,26	0,25	0,25	0,25	0,25	0,24	0,24	0,24	0,24			
450	ζ [-]	0,21	0,2	0,2	0,2	0,19	0,19	0,19	0,19	0,19	0,18	0,18	0,18			
500	ζ [-]	0,17	0,16	0,16	0,16	0,15	0,15	0,15	0,15	0,15	0,15	0,14	0,14			
550	ζ [-]	0,14	0,13	0,13	0,13	0,13	0,13	0,12	0,12	0,12	0,12	0,12	0,12			
600	ζ [-]	0,12	0,11	0,11	0,11	0,11	0,11	0,1	0,1	0,1	0,1	0,1	0,1			
650	ζ [-]	0,1	0,1	0,1	0,09	0,09	0,09	0,09	0,09	0,09	0,08	0,08	0,08			
700	ζ [-]	0,09	0,09	0,08	0,08	0,08	0,08	0,08	0,08	0,07	0,07	0,07	0,07			
750	ζ [-]	0,08	0,08	0,07	0,07	0,07	0,07	0,07	0,07	0,07	0,06	0,06	0,06			
800	ζ [-]	0,07	0,07	0,07	0,06	0,06	0,06	0,06	0,06	0,06	0,06	0,06	0,06			
850	ζ [-]	0,06	0,06	0,06	0,06	0,06	0,06	0,05	0,05	0,05	0,05	0,05	0,05			
900	ζ [-]	0,06	0,06	0,06	0,05	0,05	0,05	0,05	0,05	0,05	0,05	0,05	0,05			
950	ζ [-]	0,05	0,05	0,05	0,05	0,05	0,05	0,05	0,04	0,04	0,04	0,04	0,04			
1000	ζ [-]	0,05	0,05	0,05	0,04	0,04	0,04	0,04	0,04	0,04	0,04	0,04	0,04			

Example

Data

Hn = 550 mm, Wn = 500 mm, v = 9 m/s

Calculation

$\Delta p = 0.2 * (9 \text{ m/s})^2 * 0.6 = 9.72 \text{ Pa}$

CU2 - CU2L - CU2-L500 - CU2 ATEX - CU2L ATEX - A-weighted sound power level Lwa in the room

Hn\Wn [mm]		200	250	300	350	400	450	500	550	600	650	700	750	800	850	
200	Sn [m ²]	0,0200	0,0250	0,0310	0,0370	0,0430	0,0490	0,0550	0,0610	0,0670	0,0730	0,0790	0,0850	0,0910	0,0970	
	Sn [%]	49,00	51,00	52,00	53,00	54,00	55,00	55,00	56,00	56,00	56,00	56,00	57,00	57,00	57,00	
	Q [m ³ /h]	657	832	1.007	1.182	1.356	1.531	1.706	1.880	2.055	2.230	2.404	2.579	2.754	2.928	
	Δp [Pa]	42,70	37,50	34,50	32,50	31,10	30,10	29,30	28,70	28,20	27,70	27,40	27,10	26,80	26,60	45 dB
	Q [m ³ /h]	559	707	856	1.004	1.153	1.301	1.450	1.598	1.747	1.895	2.044	2.192	2.341	2.489	40 dB
	Δp [Pa]	30,90	27,10	24,90	23,50	22,50	21,70	21,20	20,70	20,30	20,00	19,80	19,60	19,40	19,20	
	Q [m ³ /h]	475	601	728	854	980	1.106	1.232	1.359	1.485	1.611	1.737	1.863	1.990	2.116	35 dB
	Δp [Pa]	22,30	19,60	18,00	17,00	16,20	15,70	15,30	15,00	14,70	14,50	14,30	14,10	14,00	13,90	
	Q [m ³ /h]	404	511	618	726	833	940	1.048	1.155	1.262	1.369	1.477	1.584	1.691	1.798	30 dB
	Δp [Pa]	16,10	14,10	13,00	12,30	11,70	11,30	11,10	10,80	10,60	10,50	10,30	10,20	10,10	10,00	
	Q [m ³ /h]	343	434	526	617	708	799	890	982	1.073	1.164	1.255	1.346	1.437	1.529	25 dB
	Δp [Pa]	11,60	10,20	9,40	8,90	8,50	8,20	8,00	7,80	7,70	7,60	7,50	7,40	7,30	7,20	
250	Sn [m ²]	0,0280	0,0360	0,0450	0,0530	0,0620	0,0700	0,0780	0,0870	0,0950	0,1040	0,1120	0,1210	0,1290	0,1380	
	Sn [%]	55,00	58,00	59,00	61,00	62,00	62,00	63,00	63,00	64,00	64,00	64,00	64,00	65,00	65,00	
	Q [m ³ /h]	862	1.095	1.329	1.562	1.796	2.029	2.263	2.497	2.731	2.964	3.198	3.432	3.666	3.899	45 dB
	Δp [Pa]	26,30	22,40	20,20	18,80	17,80	17,00	16,40	16,00	15,60	15,30	15,10	14,80	14,70	14,50	
	Q [m ³ /h]	733	931	1.129	1.328	1.526	1.725	1.924	2.122	2.321	2.520	2.718	2.917	3.116	3.314	40 dB
	Δp [Pa]	19,00	16,20	14,60	13,60	12,80	12,30	11,90	11,60	11,30	11,10	10,90	10,70	10,60	10,50	
	Q [m ³ /h]	623	791	960	1.129	1.298	1.466	1.635	1.804	1.973	2.142	2.311	2.479	2.648	2.817	35 dB
	Δp [Pa]	13,70	11,70	10,50	9,80	9,30	8,90	8,60	8,30	8,20	8,00	7,90	7,70	7,70	7,60	
	Q [m ³ /h]	530	673	816	959	1.103	1.246	1.390	1.533	1.677	1.820	1.964	2.108	2.251	2.395	30 dB
	Δp [Pa]	9,90	8,50	7,60	7,10	6,70	6,40	6,20	6,00	5,90	5,80	5,70	5,60	5,50	5,50	
	Q [m ³ /h]	450	572	694	816	937	1.059	1.181	1.303	1.425	1.547	1.669	1.791	1.913	2.036	25 dB
	Δp [Pa]	7,20	6,10	5,50	5,10	4,80	4,60	4,50	4,40	4,30	4,20	4,10	4,00	4,00	3,90	
300	Sn [m ²]	0,0360	0,0470	0,0580	0,0690	0,0800	0,0910	0,1020	0,1130	0,1240	0,1340	0,1450	0,1560	0,1670	0,1780	
	Sn [%]	60,00	62,00	64,00	65,00	66,00	67,00	68,00	68,00	69,00	69,00	69,00	69,00	70,00	70,00	
	Q [m ³ /h]	1.068	1.361	1.655	1.949	2.243	2.538	2.832	3.127	3.422	3.717	4.012	4.307	4.602	4.897	45 dB
	Δp [Pa]	19,30	16,00	14,20	13,00	12,20	11,60	11,10	10,70	10,40	10,20	10,00	9,80	9,70	9,50	
	Q [m ³ /h]	908	1.157	1.407	1.657	1.907	2.157	2.408	2.658	2.909	3.159	3.410	3.661	3.911	4.162	40 dB
	Δp [Pa]	13,90	11,60	10,30	9,40	8,80	8,40	8,00	7,80	7,50	7,40	7,20	7,10	7,00	6,90	
	Q [m ³ /h]	772	984	1.196	1.408	1.621	1.834	2.046	2.259	2.472	2.685	2.899	3.112	3.325	3.538	35 dB
	Δp [Pa]	10,10	8,40	7,40	6,80	6,40	6,00	5,80	5,60	5,50	5,30	5,20	5,10	5,00	5,00	
	Q [m ³ /h]	656	836	1.016	1.197	1.378	1.559	1.740	1.921	2.102	2.283	2.464	2.645	2.826	3.007	30 dB
	Δp [Pa]	7,30	6,10	5,40	4,90	4,60	4,40	4,20	4,10	3,90	3,80	3,80	3,70	3,60	3,60	
	Q [m ³ /h]	558	711	864	1.017	1.171	1.325	1.479	1.632	1.786	1.940	2.094	2.248	2.402	2.556	25 dB
	Δp [Pa]	5,20	4,40	3,90	3,50	3,30	3,20	3,00	2,90	2,80	2,80	2,70	2,70	2,60	2,60	

Hn\Wn [mm]	200	250	300	350	400	450	500	550	600	650	700	750	800	850		
350	Sn [m ²]	0,0440	0,0580	0,0710	0,0840	0,0980	0,1110	0,1250	0,1380	0,1520	0,1650	0,1790	0,1920	0,2060	0,2190	
	Sn [%]	63,00	66,00	68,00	69,00	70,00	71,00	71,00	72,00	72,00	73,00	73,00	73,00	73,00	74,00	
	Q [m ³ /h]	1.276	1.630	1.985	2.341	2.698	3.055	3.412	3.769	4.127	4.485	4.843	5.201	5.559	5.917	45 dB
	Δp [Pa]	15,50	12,60	11,00	10,00	9,20	8,70	8,30	8,00	7,70	7,50	7,30	7,20	7,10	6,90	
	Q [m ³ /h]	1.084	1.385	1.687	1.990	2.293	2.596	2.900	3.204	3.508	3.812	4.116	4.421	4.725	5.029	40 dB
	Δp [Pa]	11,20	9,10	7,90	7,20	6,70	6,30	6,00	5,80	5,60	5,40	5,30	5,20	5,10	5,00	
	Q [m ³ /h]	922	1.177	1.434	1.691	1.949	2.207	2.465	2.723	2.982	3.240	3.499	3.758	4.016	4.275	35 dB
	Δp [Pa]	8,10	6,60	5,70	5,20	4,80	4,50	4,30	4,20	4,00	3,90	3,80	3,80	3,70	3,60	
	Q [m ³ /h]	783	1.001	1.219	1.438	1.657	1.876	2.095	2.315	2.535	2.754	2.974	3.194	3.414	3.634	30 dB
	Δp [Pa]	5,80	4,80	4,10	3,80	3,50	3,30	3,10	3,00	2,90	2,80	2,80	2,70	2,70	2,60	
Q [m ³ /h]	666	851	1.036	1.222	1.408	1.595	1.781	1.968	2.154	2.341	2.528	2.715	2.902	3.089	25 dB	
Δp [Pa]	4,20	3,40	3,00	2,70	2,50	2,40	2,30	2,20	2,10	2,00	2,00	2,00	1,90	1,90		
400	Sn [m ²]	0,0520	0,0680	0,0840	0,1000	0,1160	0,1320	0,1480	0,1640	0,1800	0,1960	0,2120	0,2280	0,2440	0,2600	
	Sn [%]	65,00	68,00	70,00	72,00	73,00	73,00	74,00	75,00	75,00	75,00	76,00	76,00	76,00	76,00	
	Q [m ³ /h]	1.484	1.900	2.318	2.737	3.157	3.578	4.000	4.421	4.843	5.266	5.688	6.111	6.533	6.956	45 dB
	Δp [Pa]	13,10	10,50	9,00	8,10	7,50	7,00	6,60	6,30	6,10	5,90	5,80	5,60	5,50	5,40	
	Q [m ³ /h]	1.261	1.615	1.970	2.327	2.684	3.041	3.400	3.758	4.117	4.476	4.835	5.194	5.554	5.913	40 dB
	Δp [Pa]	9,50	7,60	6,50	5,90	5,40	5,00	4,80	4,60	4,40	4,30	4,20	4,10	4,00	3,90	
	Q [m ³ /h]	1.072	1.373	1.675	1.978	2.281	2.585	2.890	3.194	3.499	3.804	4.110	4.415	4.721	5.026	35 dB
	Δp [Pa]	6,80	5,50	4,70	4,20	3,90	3,60	3,50	3,30	3,20	3,10	3,00	2,90	2,90	2,80	
	Q [m ³ /h]	911	1.167	1.423	1.681	1.939	2.197	2.456	2.715	2.974	3.234	3.493	3.753	4.012	4.272	30 dB
	Δp [Pa]	4,90	4,00	3,40	3,10	2,80	2,60	2,50	2,40	2,30	2,20	2,20	2,10	2,10	2,00	
Q [m ³ /h]	775	992	1.210	1.429	1.648	1.868	2.088	2.308	2.528	2.749	2.969	3.190	3.411	3.631	25 dB	
Δp [Pa]	3,60	2,90	2,50	2,20	2,00	1,90	1,80	1,70	1,70	1,60	1,60	1,50	1,50	1,50		
450	Sn [m ²]	0,0610	0,0790	0,0970	0,1160	0,1340	0,1530	0,1710	0,1900	0,2080	0,2270	0,2450	0,2630	0,2820	0,3000	
	Sn [%]	67,00	70,00	72,00	74,00	75,00	75,00	76,00	77,00	77,00	77,00	78,00	78,00	78,00	79,00	
	Q [m ³ /h]	1.693	2.171	2.653	3.137	3.622	4.108	4.594	5.082	5.569	6.057	6.546	7.035	7.524	8.013	45 dB
	Δp [Pa]	11,50	9,10	7,70	6,90	6,30	5,80	5,50	5,20	5,00	4,90	4,70	4,60	4,50	4,40	
	Q [m ³ /h]	1.439	1.846	2.255	2.666	3.078	3.491	3.905	4.319	4.734	5.149	5.564	5.979	6.395	6.811	40 dB
	Δp [Pa]	8,30	6,60	5,60	5,00	4,50	4,20	4,00	3,80	3,60	3,50	3,40	3,30	3,20	3,20	
	Q [m ³ /h]	1.223	1.569	1.917	2.266	2.617	2.968	3.319	3.671	4.024	4.377	4.730	5.083	5.436	5.789	35 dB
	Δp [Pa]	6,00	4,70	4,00	3,60	3,30	3,00	2,90	2,70	2,60	2,50	2,50	2,40	2,30	2,30	
	Q [m ³ /h]	1.040	1.334	1.629	1.926	2.224	2.523	2.822	3.121	3.420	3.720	4.020	4.320	4.620	4.921	30 dB
	Δp [Pa]	4,30	3,40	2,90	2,60	2,40	2,20	2,10	2,00	1,90	1,80	1,80	1,70	1,70	1,70	
Q [m ³ /h]	884	1.134	1.385	1.637	1.891	2.144	2.398	2.653	2.907	3.162	3.417	3.672	3.927	4.183	25 dB	
Δp [Pa]	3,10	2,50	2,10	1,90	1,70	1,60	1,50	1,40	1,40	1,30	1,30	1,30	1,20	1,20		

Hn\Wn [mm]	200	250	300	350	400	450	500	550	600	650	700	750	800	850		
500	Sn [m ²]	0,0690	0,0900	0,1110	0,1320	0,1530	0,1730	0,1940	0,2150	0,2360	0,2570	0,2780	0,2990	0,3200	0,3410	
	Sn [%]	69,00	72,00	74,00	75,00	76,00	77,00	78,00	78,00	79,00	79,00	79,00	80,00	80,00	80,00	
	Q [m ³ /h]	1.902	2.444	2.990	3.539	4.090	4.642	5.195	5.749	6.304	6.859	7.414	7.970	8.527	9.083	45 dB
	Δp [Pa]	10,40	8,10	6,80	6,00	5,40	5,00	4,70	4,50	4,30	4,10	4,00	3,90	3,80	3,70	
	Q [m ³ /h]	1.617	2.078	2.542	3.008	3.476	3.945	4.416	4.887	5.358	5.830	6.302	6.775	7.248	7.721	40 dB
	Δp [Pa]	7,50	5,80	4,90	4,30	3,90	3,60	3,40	3,20	3,10	3,00	2,90	2,80	2,70	2,70	
	Q [m ³ /h]	1.374	1.766	2.160	2.557	2.955	3.354	3.753	4.154	4.554	4.956	5.357	5.759	6.161	6.563	35 dB
	Δp [Pa]	5,40	4,20	3,60	3,10	2,80	2,60	2,50	2,30	2,20	2,10	2,10	2,00	2,00	1,90	
	Q [m ³ /h]	1.168	1.501	1.836	2.173	2.512	2.851	3.190	3.531	3.871	4.212	4.553	4.895	5.237	5.578	30 dB
	Δp [Pa]	3,90	3,10	2,60	2,30	2,00	1,90	1,80	1,70	1,60	1,60	1,50	1,50	1,40	1,40	
550	Q [m ³ /h]	993	1.276	1.561	1.847	2.135	2.423	2.712	3.001	3.291	3.580	3.870	4.161	4.451	4.742	25 dB
	Δp [Pa]	2,80	2,20	1,90	1,60	1,50	1,40	1,30	1,20	1,20	1,10	1,10	1,10	1,00	1,00	
	Sn [m ²]	0,0770	0,1000	0,1240	0,1470	0,1710	0,1940	0,2180	0,2410	0,2650	0,2880	0,3110	0,3350	0,3580	0,3820	
	Sn [%]	70,00	73,00	75,00	77,00	78,00	78,00	79,00	80,00	80,00	81,00	81,00	81,00	81,00	82,00	
	Q [m ³ /h]	2.112	2.718	3.329	3.944	4.561	5.180	5.800	6.422	7.045	7.668	8.292	8.917	9.542	10.167	45 dB
	Δp [Pa]	9,50	7,30	6,10	5,30	4,80	4,40	4,10	3,90	3,70	3,60	3,40	3,30	3,20	3,20	
	Q [m ³ /h]	1.795	2.310	2.830	3.352	3.877	4.403	4.930	5.459	5.988	6.518	7.048	7.579	8.110	8.642	40 dB
	Δp [Pa]	6,90	5,30	4,40	3,90	3,50	3,20	3,00	2,80	2,70	2,60	2,50	2,40	2,30	2,30	
	Q [m ³ /h]	1.526	1.964	2.405	2.849	3.295	3.743	4.191	4.640	5.090	5.540	5.991	6.442	6.894	7.346	35 dB
	Δp [Pa]	5,00	3,80	3,20	2,80	2,50	2,30	2,20	2,00	1,90	1,90	1,80	1,70	1,70	1,70	
600	Q [m ³ /h]	1.297	1.669	2.044	2.422	2.801	3.181	3.562	3.944	4.326	4.709	5.093	5.476	5.860	6.244	30 dB
	Δp [Pa]	3,60	2,80	2,30	2,00	1,80	1,70	1,60	1,50	1,40	1,30	1,30	1,30	1,20	1,20	
	Q [m ³ /h]	1.103	1.419	1.738	2.059	2.381	2.704	3.028	3.353	3.678	4.003	4.329	4.655	4.981	5.307	25 dB
	Δp [Pa]	2,60	2,00	1,70	1,50	1,30	1,20	1,10	1,10	1,00	1,00	0,90	0,90	0,90	0,90	
	Sn [m ²]	0,0850	0,1110	0,1370	0,1630	0,1890	0,2150	0,2410	0,2670	0,2930	0,3190	0,3450	0,3710	0,3970	0,4220	
	Sn [%]	71,00	74,00	76,00	78,00	79,00	80,00	80,00	81,00	81,00	82,00	82,00	82,00	83,00	83,00	
	Q [m ³ /h]	2.323	2.993	3.669	4.350	5.035	5.722	6.410	7.101	7.792	8.485	9.178	9.872	10.566	11.261	45 dB
	Δp [Pa]	8,90	6,80	5,60	4,80	4,30	4,00	3,70	3,50	3,30	3,20	3,00	2,90	2,90	2,80	
	Q [m ³ /h]	1.974	2.544	3.119	3.698	4.279	4.863	5.449	6.036	6.623	7.212	7.801	8.391	8.982	9.572	40 dB
	Δp [Pa]	6,40	4,90	4,00	3,50	3,10	2,90	2,70	2,50	2,40	2,30	2,20	2,10	2,10	2,00	
600	Q [m ³ /h]	1.678	2.162	2.651	3.143	3.638	4.134	4.632	5.130	5.630	6.130	6.631	7.133	7.634	8.137	35 dB
	Δp [Pa]	4,60	3,50	2,90	2,50	2,30	2,10	1,90	1,80	1,70	1,60	1,60	1,50	1,50	1,50	
	Q [m ³ /h]	1.426	1.838	2.253	2.672	3.092	3.514	3.937	4.361	4.785	5.211	5.637	6.063	6.489	6.916	30 dB
	Δp [Pa]	3,30	2,50	2,10	1,80	1,60	1,50	1,40	1,30	1,20	1,20	1,10	1,10	1,10	1,00	
	Q [m ³ /h]	1.212	1.562	1.915	2.271	2.628	2.987	3.346	3.707	4.068	4.429	4.791	5.153	5.516	5.879	25 dB
	Δp [Pa]	2,40	1,80	1,50	1,30	1,20	1,10	1,00	0,90	0,90	0,90	0,80	0,80	0,80	0,80	

Hn\Wn [mm]	200	250	300	350	400	450	500	550	600	650	700	750	800	850		
650	Sn [m ²]	0,0930	0,1220	0,1500	0,1790	0,2070	0,2360	0,2640	0,2920	0,3210	0,3490	0,3780	0,4060	0,4350	0,4630	
	Sn [%]	72,00	75,00	77,00	79,00	80,00	81,00	81,00	82,00	82,00	83,00	83,00	83,00	84,00	84,00	
	Q [m ³ /h]	2.533	3.268	4.010	4.759	5.511	6.266	7.024	7.784	8.545	9.307	10.071	10.835	11.600	12.366	45 dB
	Δp [Pa]	8,30	6,30	5,20	4,40	4,00	3,60	3,30	3,10	3,00	2,80	2,70	2,60	2,50	2,50	
	Q [m ³ /h]	2.153	2.778	3.409	4.045	4.684	5.326	5.970	6.616	7.263	7.911	8.560	9.210	9.860	10.511	40 dB
	Δp [Pa]	6,00	4,50	3,70	3,20	2,90	2,60	2,40	2,30	2,10	2,00	2,00	1,90	1,80	1,80	
	Q [m ³ /h]	1.830	2.361	2.898	3.438	3.982	4.527	5.075	5.624	6.174	6.725	7.276	7.829	8.381	8.935	35 dB
	Δp [Pa]	4,40	3,30	2,70	2,30	2,10	1,90	1,70	1,60	1,60	1,50	1,40	1,40	1,30	1,30	
	Q [m ³ /h]	1.556	2.007	2.463	2.922	3.384	3.848	4.314	4.780	5.248	5.716	6.185	6.654	7.124	7.594	30 dB
	Δp [Pa]	3,10	2,40	1,90	1,70	1,50	1,40	1,30	1,20	1,10	1,10	1,00	1,00	1,00	0,90	
Q [m ³ /h]	1.322	1.706	2.094	2.484	2.877	3.271	3.667	4.063	4.461	4.859	5.257	5.656	6.056	6.455	25 dB	
Δp [Pa]	2,30	1,70	1,40	1,20	1,10	1,00	0,90	0,90	0,80	0,80	0,70	0,70	0,70	0,70		
700	Sn [m ²]	0,1020	0,1320	0,1630	0,1940	0,2250	0,2560	0,2870	0,3180	0,3490	0,3800	0,4110	0,4420	0,4730	0,5040	
	Sn [%]	73,00	76,00	78,00	79,00	80,00	81,00	82,00	83,00	83,00	84,00	84,00	84,00	84,00	85,00	
	Q [m ³ /h]	2.744	3.544	4.353	5.168	5.989	6.813	7.641	8.471	9.302	10.136	10.970	11.806	12.642	13.479	45 dB
	Δp [Pa]	7,90	5,90	4,80	4,10	3,70	3,30	3,10	2,90	2,70	2,60	2,50	2,40	2,30	2,20	
	Q [m ³ /h]	2.333	3.012	3.700	4.393	5.091	5.791	6.495	7.200	7.907	8.615	9.325	10.035	10.746	11.458	40 dB
	Δp [Pa]	5,70	4,30	3,50	3,00	2,60	2,40	2,20	2,10	2,00	1,90	1,80	1,70	1,70	1,60	
	Q [m ³ /h]	1.983	2.560	3.145	3.734	4.327	4.923	5.521	6.120	6.721	7.323	7.926	8.530	9.134	9.739	35 dB
	Δp [Pa]	4,10	3,10	2,50	2,20	1,90	1,70	1,60	1,50	1,40	1,30	1,30	1,20	1,20	1,20	
	Q [m ³ /h]	1.685	2.176	2.673	3.174	3.678	4.184	4.693	5.202	5.713	6.225	6.737	7.250	7.764	8.278	30 dB
	Δp [Pa]	3,00	2,20	1,80	1,60	1,40	1,30	1,20	1,10	1,00	1,00	0,90	0,90	0,90	0,80	
Q [m ³ /h]	1.433	1.850	2.272	2.698	3.126	3.557	3.989	4.422	4.856	5.291	5.727	6.163	6.599	7.037	25 dB	
Δp [Pa]	2,20	1,60	1,30	1,10	1,00	0,90	0,80	0,80	0,70	0,70	0,70	0,60	0,60	0,60		
750	Sn [m ²]	0,1100	0,1430	0,1770	0,2100	0,2440	0,2770	0,3100	0,3440	0,3770	0,4110	0,4440	0,4780	0,5110	0,5450	
	Sn [%]	73,00	76,00	78,00	80,00	81,00	82,00	83,00	83,00	84,00	84,00	85,00	85,00	85,00	85,00	
	Q [m ³ /h]	2.955	3.820	4.696	5.579	6.469	7.363	8.261	9.161	10.064	10.969	11.875	12.782	13.691	14.601	45 dB
	Δp [Pa]	7,60	5,60	4,50	3,90	3,40	3,10	2,80	2,60	2,50	2,40	2,30	2,20	2,10	2,00	
	Q [m ³ /h]	2.512	3.247	3.991	4.742	5.499	6.259	7.022	7.787	8.554	9.323	10.094	10.865	11.637	12.411	40 dB
	Δp [Pa]	5,50	4,10	3,30	2,80	2,50	2,20	2,00	1,90	1,80	1,70	1,60	1,60	1,50	1,50	
	Q [m ³ /h]	2.135	2.760	3.393	4.031	4.674	5.320	5.968	6.619	7.271	7.925	8.580	9.235	9.892	10.549	35 dB
	Δp [Pa]	3,90	2,90	2,40	2,00	1,80	1,60	1,50	1,40	1,30	1,20	1,20	1,10	1,10	1,10	
	Q [m ³ /h]	1.815	2.346	2.884	3.426	3.973	4.522	5.073	5.626	6.181	6.736	7.293	7.850	8.408	8.967	30 dB
	Δp [Pa]	2,90	2,10	1,70	1,50	1,30	1,20	1,10	1,00	0,90	0,90	0,90	0,80	0,80	0,80	
Q [m ³ /h]	1.543	1.994	2.451	2.912	3.377	3.844	4.312	4.782	5.254	5.726	6.199	6.673	7.147	7.622	25 dB	
Δp [Pa]	2,10	1,50	1,20	1,10	0,90	0,80	0,80	0,70	0,70	0,60	0,60	0,60	0,60	0,60		

Hn\Wn [mm]	200	250	300	350	400	450	500	550	600	650	700	750	800	850		
800	Sn [m ²]	0,1180	0,1540	0,1900	0,2260	0,2620	0,2980	0,3340	0,3700	0,4060	0,4410	0,4770	0,5130	0,5490	0,5850	
	Sn [%]	74,00	77,00	79,00	81,00	82,00	83,00	83,00	84,00	84,00	85,00	85,00	86,00	86,00	86,00	
	Q [m ³ /h]	3.167	4.097	5.039	5.991	6.950	7.914	8.883	9.855	10.829	11.806	12.785	13.765	14.746	15.729	45 dB
	Δp [Pa]	7,30	5,30	4,30	3,60	3,20	2,90	2,60	2,50	2,30	2,20	2,10	2,00	1,90	1,90	
	Q [m ³ /h]	2.692	3.482	4.283	5.093	5.908	6.727	7.550	8.377	9.205	10.035	10.867	11.700	12.535	13.370	40 dB
	Δp [Pa]	5,20	3,90	3,10	2,60	2,30	2,10	1,90	1,80	1,70	1,60	1,50	1,40	1,40	1,30	
	Q [m ³ /h]	2.288	2.960	3.641	4.329	5.022	5.718	6.418	7.120	7.824	8.530	9.237	9.945	10.654	11.364	35 dB
	Δp [Pa]	3,80	2,80	2,20	1,90	1,70	1,50	1,40	1,30	1,20	1,10	1,10	1,00	1,00	1,00	
	Q [m ³ /h]	1.945	2.516	3.095	3.679	4.268	4.861	5.455	6.052	6.651	7.250	7.852	8.454	9.056	9.660	30 dB
	Δp [Pa]	2,70	2,00	1,60	1,40	1,20	1,10	1,00	0,90	0,90	0,80	0,80	0,80	0,70	0,70	
Q [m ³ /h]	1.653	2.139	2.631	3.128	3.628	4.132	4.637	5.144	5.653	6.163	6.674	7.186	7.698	8.211	25 dB	
Δp [Pa]	2,00	1,50	1,20	1,00	0,90	0,80	0,70	0,70	0,60	0,60	0,60	0,50	0,50	0,50		
850	Sn [m ²]	0,1260	0,1650	0,2030	0,2410	0,2800	0,3180	0,3570	0,3950	0,4340	0,4720	0,5110	0,5490	0,5880	0,6260	
	Sn [%]	74,00	77,00	80,00	81,00	82,00	83,00	84,00	85,00	85,00	85,00	86,00	86,00	86,00	87,00	
	Q [m ³ /h]	3.378	4.374	5.384	6.404	7.433	8.468	9.507	10.551	11.598	12.647	13.699	14.752	15.808	16.864	45 dB
	Δp [Pa]	7,00	5,10	4,10	3,50	3,00	2,70	2,50	2,30	2,20	2,00	1,90	1,90	1,80	1,70	
	Q [m ³ /h]	2.872	3.718	4.576	5.444	6.318	7.198	8.081	8.968	9.858	10.750	11.644	12.540	13.437	14.335	40 dB
	Δp [Pa]	5,10	3,70	3,00	2,50	2,20	2,00	1,80	1,70	1,60	1,50	1,40	1,30	1,30	1,20	
	Q [m ³ /h]	2.441	3.160	3.890	4.627	5.370	6.118	6.869	7.623	8.380	9.138	9.898	10.659	11.421	12.185	35 dB
	Δp [Pa]	3,70	2,70	2,10	1,80	1,60	1,40	1,30	1,20	1,10	1,10	1,00	1,00	0,90	0,90	
	Q [m ³ /h]	2.075	2.686	3.306	3.933	4.565	5.200	5.839	6.480	7.123	7.767	8.413	9.060	9.708	10.357	30 dB
	Δp [Pa]	2,60	1,90	1,50	1,30	1,10	1,00	0,90	0,90	0,80	0,80	0,70	0,70	0,70	0,70	
Q [m ³ /h]	1.764	2.283	2.810	3.343	3.880	4.420	4.963	5.508	6.054	6.602	7.151	7.701	8.252	8.803	25 dB	
Δp [Pa]	1,90	1,40	1,10	0,90	0,80	0,70	0,70	0,60	0,60	0,60	0,50	0,50	0,50	0,50		
900	Sn [m ²]	0,1340	0,1750	0,2160	0,2570	0,2980	0,3390	0,3800	0,4210	0,4620	0,5030	0,5440	0,5850	0,6260	0,6670	
	Sn [%]	75,00	78,00	80,00	82,00	83,00	84,00	84,00	85,00	86,00	86,00	86,00	87,00	87,00	87,00	
	Q [m ³ /h]	3.590	4.651	5.729	6.818	7.917	9.023	10.134	11.250	12.369	13.492	14.617	15.745	16.874	18.005	45 dB
	Δp [Pa]	6,80	4,90	3,90	3,30	2,90	2,60	2,30	2,20	2,00	1,90	1,80	1,70	1,70	1,60	
	Q [m ³ /h]	3.052	3.953	4.869	5.795	6.729	7.669	8.614	9.562	10.514	11.468	12.425	13.383	14.343	15.304	40 dB
	Δp [Pa]	4,90	3,60	2,80	2,40	2,10	1,90	1,70	1,60	1,50	1,40	1,30	1,30	1,20	1,20	
	Q [m ³ /h]	2.594	3.360	4.139	4.926	5.720	6.519	7.322	8.128	8.937	9.748	10.561	11.376	12.192	13.009	35 dB
	Δp [Pa]	3,50	2,60	2,10	1,70	1,50	1,30	1,20	1,10	1,10	1,00	0,90	0,90	0,90	0,80	
	Q [m ³ /h]	2.205	2.856	3.518	4.187	4.862	5.541	6.224	6.909	7.596	8.286	8.977	9.669	10.363	11.058	30 dB
	Δp [Pa]	2,60	1,90	1,50	1,20	1,10	1,00	0,90	0,80	0,80	0,70	0,70	0,70	0,60	0,60	
Q [m ³ /h]	1.874	2.428	2.990	3.559	4.133	4.710	5.290	5.873	6.457	7.043	7.631	8.219	8.809	9.399	25 dB	
Δp [Pa]	1,80	1,30	1,10	0,90	0,80	0,70	0,60	0,60	0,60	0,50	0,50	0,50	0,50	0,40		

Hn\Wn [mm]	200	250	300	350	400	450	500	550	600	650	700	750	800	850		
950	Sn [m ²]	0,1430	0,1860	0,2290	0,2730	0,3160	0,3600	0,4030	0,4470	0,4900	0,5340	0,5770	0,6200	0,6640	0,7070	
	Sn [%]	75,00	78,00	80,00	82,00	83,00	84,00	85,00	85,00	86,00	86,00	87,00	87,00	87,00	88,00	
	Q [m ³ /h]	3.802	4.929	6.074	7.233	8.402	9.579	10.762	11.951	13.144	14.340	15.539	16.741	17.945	19.151	45 dB
	Δp [Pa]	6,60	4,80	3,80	3,20	2,70	2,50	2,20	2,10	1,90	1,80	1,70	1,60	1,60	1,50	
	Q [m ³ /h]	3.232	4.189	5.163	6.148	7.142	8.142	9.148	10.158	11.172	12.189	13.209	14.230	15.254	16.279	40 dB
	Δp [Pa]	4,80	3,40	2,70	2,30	2,00	1,80	1,60	1,50	1,40	1,30	1,20	1,20	1,10	1,10	
	Q [m ³ /h]	2.747	3.561	4.388	5.226	6.070	6.921	7.776	8.635	9.496	10.361	11.227	12.096	12.966	13.837	35 dB
	Δp [Pa]	3,40	2,50	2,00	1,70	1,40	1,30	1,20	1,10	1,00	0,90	0,90	0,90	0,80	0,80	
	Q [m ³ /h]	2.335	3.027	3.730	4.442	5.160	5.883	6.609	7.339	8.072	8.807	9.543	10.281	11.021	11.762	30 dB
	Δp [Pa]	2,50	1,80	1,40	1,20	1,00	0,90	0,80	0,80	0,70	0,70	0,60	0,60	0,60	0,60	
	Q [m ³ /h]	1.985	2.573	3.171	3.776	4.386	5.000	5.618	6.239	6.861	7.486	8.112	8.739	9.368	9.997	25 dB
	Δp [Pa]	1,80	1,30	1,00	0,90	0,70	0,70	0,60	0,60	0,50	0,50	0,50	0,40	0,40	0,40	
1000	Sn [m ²]	0,1510	0,1970	0,2430	0,2890	0,3350	0,3800	0,4260	0,4720	0,5180	0,5640	0,6100	0,6560	0,7020	0,7480	
	Sn [%]	75,00	79,00	81,00	82,00	84,00	85,00	85,00	86,00	86,00	87,00	87,00	87,00	88,00	88,00	
	Q [m ³ /h]	4.014	5.207	6.420	7.648	8.888	10.136	11.392	12.654	13.920	15.191	16.465	17.742	19.021	20.303	45 dB
	Δp [Pa]	6,40	4,60	3,60	3,00	2,60	2,30	2,10	2,00	1,80	1,70	1,60	1,50	1,50	1,40	
	Q [m ³ /h]	3.412	4.426	5.457	6.501	7.554	8.616	9.683	10.756	11.832	12.912	13.995	15.081	16.168	17.257	40 dB
	Δp [Pa]	4,60	3,30	2,60	2,20	1,90	1,70	1,50	1,40	1,30	1,20	1,20	1,10	1,10	1,00	
	Q [m ³ /h]	2.900	3.762	4.638	5.526	6.421	7.324	8.231	9.143	10.058	10.976	11.896	12.819	13.743	14.669	35 dB
	Δp [Pa]	3,30	2,40	1,90	1,60	1,40	1,20	1,10	1,00	0,90	0,90	0,80	0,80	0,80	0,70	
	Q [m ³ /h]	2.465	3.198	3.943	4.697	5.458	6.225	6.996	7.771	8.549	9.329	10.112	10.896	11.682	12.469	30 dB
	Δp [Pa]	2,40	1,70	1,40	1,10	1,00	0,90	0,80	0,70	0,70	0,60	0,60	0,60	0,60	0,50	
	Q [m ³ /h]	2.095	2.718	3.351	3.992	4.639	5.291	5.947	6.606	7.267	7.930	8.595	9.262	9.929	10.598	25 dB
	Δp [Pa]	1,70	1,30	1,00	0,80	0,70	0,60	0,60	0,50	0,50	0,50	0,40	0,40	0,40	0,40	

Hn\Wn [mm]	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500		
200	Sn [m ²]	0,1030	0,1090	0,1150	0,1210	0,1270	0,1330	0,1390	0,1440	0,1500	0,1560	0,1620	0,1680	0,1740	
	Sn [%]	57,00	57,00	57,00	57,00	58,00	58,00	58,00	58,00	58,00	58,00	58,00	58,00	58,00	
	Q [m ³ /h]	3.103	3.278	3.452	3.627	3.802	3.976	4.151	4.325	4.500	4.675	4.849	5.024	5.199	45 dB
	Δp [Pa]	26,40	26,20	26,00	25,90	25,80	25,60	25,50	25,40	25,40	25,30	25,20	25,10	25,10	
	Q [m ³ /h]	2.638	2.786	2.934	3.083	3.231	3.380	3.528	3.677	3.825	3.974	4.122	4.271	4.419	40 dB
	Δp [Pa]	19,10	18,90	18,80	18,70	18,60	18,50	18,50	18,40	18,30	18,30	18,20	18,10	18,10	
	Q [m ³ /h]	2.242	2.368	2.494	2.620	2.747	2.873	2.999	3.125	3.251	3.378	3.504	3.630	3.756	35 dB
	Δp [Pa]	13,80	13,70	13,60	13,50	13,50	13,40	13,30	13,30	13,20	13,20	13,20	13,10	13,10	
	Q [m ³ /h]	1.906	2.013	2.120	2.227	2.335	2.442	2.549	2.656	2.764	2.871	2.978	3.085	3.193	30 dB
	Δp [Pa]	9,90	9,90	9,80	9,80	9,70	9,70	9,60	9,60	9,60	9,50	9,50	9,50	9,40	
	Q [m ³ /h]	1.620	1.711	1.802	1.893	1.984	2.076	2.167	2.258	2.349	2.440	2.532	2.623	2.714	25 dB
	Δp [Pa]	7,20	7,10	7,10	7,10	7,00	7,00	7,00	6,90	6,90	6,90	6,90	6,80	6,80	

Hn\Wn [mm]		900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500	
250	Sn [m ²]	0,1460	0,1540	0,1630	0,1710	0,1800	0,1880	0,1970	0,2050	0,2140	0,2220	0,2310	0,2390	0,2470	
	Sn [%]	65,00	65,00	65,00	65,00	65,00	65,00	66,00	66,00	66,00	66,00	66,00	66,00	66,00	
	Q [m ³ /h]	4.133	4.367	4.601	4.835	5.068	5.302	5.536	5.770	6.004	6.237	6.471	6.705	6.939	45 dB
	Δp [Pa]	14,30	14,20	14,10	14,00	13,90	13,80	13,80	13,70	13,60	13,60	13,50	13,50	13,40	
	Q [m ³ /h]	3.513	3.712	3.911	4.109	4.308	4.507	4.706	4.904	5.103	5.302	5.501	5.699	5.898	40 dB
	Δp [Pa]	10,40	10,30	10,20	10,10	10,10	10,00	9,90	9,90	9,80	9,80	9,80	9,70	9,70	
	Q [m ³ /h]	2.986	3.155	3.324	3.493	3.662	3.831	4.000	4.169	4.338	4.507	4.676	4.845	5.013	35 dB
	Δp [Pa]	7,50	7,40	7,40	7,30	7,30	7,20	7,20	7,10	7,10	7,10	7,00	7,00	7,00	
	Q [m ³ /h]	2.538	2.682	2.825	2.969	3.113	3.256	3.400	3.543	3.687	3.831	3.974	4.118	4.261	30 dB
	Δp [Pa]	5,40	5,40	5,30	5,30	5,20	5,20	5,20	5,20	5,10	5,10	5,10	5,10	5,10	
	Q [m ³ /h]	2.158	2.280	2.402	2.524	2.646	2.768	2.890	3.012	3.134	3.256	3.378	3.500	3.622	25 dB
	Δp [Pa]	3,90	3,90	3,80	3,80	3,80	3,80	3,70	3,70	3,70	3,70	3,70	3,70	3,70	
300	Sn [m ²]	0,1890	0,2000	0,2110	0,2220	0,2330	0,2440	0,2550	0,2660	0,2770	0,2880	0,2990	0,3100	0,3210	
	Sn [%]	70,00	70,00	70,00	70,00	71,00	71,00	71,00	71,00	71,00	71,00	71,00	71,00	71,00	
	Q [m ³ /h]	5.192	5.487	5.782	6.077	6.372	6.667	6.962	7.258	7.553	7.848	8.143	8.438	8.733	45 dB
	Δp [Pa]	9,40	9,30	9,20	9,10	9,10	9,00	8,90	8,90	8,80	8,80	8,70	8,70	8,70	
	Q [m ³ /h]	4.413	4.664	4.915	5.165	5.416	5.667	5.918	6.169	6.420	6.671	6.922	7.173	7.423	40 dB
	Δp [Pa]	6,80	6,70	6,70	6,60	6,50	6,50	6,50	6,40	6,40	6,30	6,30	6,30	6,30	
	Q [m ³ /h]	3.751	3.964	4.177	4.391	4.604	4.817	5.030	5.244	5.457	5.670	5.883	6.097	6.310	35 dB
	Δp [Pa]	4,90	4,90	4,80	4,80	4,70	4,70	4,70	4,60	4,60	4,60	4,60	4,50	4,50	
	Q [m ³ /h]	3.188	3.370	3.551	3.732	3.913	4.095	4.276	4.457	4.638	4.820	5.001	5.182	5.363	30 dB
	Δp [Pa]	3,60	3,50	3,50	3,40	3,40	3,40	3,40	3,30	3,30	3,30	3,30	3,30	3,30	
	Q [m ³ /h]	2.710	2.864	3.018	3.172	3.326	3.480	3.635	3.789	3.943	4.097	4.251	4.405	4.559	25 dB
	Δp [Pa]	2,60	2,50	2,50	2,50	2,50	2,50	2,40	2,40	2,40	2,40	2,40	2,40	2,40	
350	Sn [m ²]	0,2320	0,2460	0,2590	0,2730	0,2860	0,3000	0,3130	0,3270	0,3400	0,3530	0,3670	0,3800	0,3940	
	Sn [%]	74,00	74,00	74,00	74,00	74,00	74,00	75,00	75,00	75,00	75,00	75,00	75,00	75,00	
	Q [m ³ /h]	6.275	6.633	6.991	7.350	7.708	8.066	8.425	8.783	9.142	9.500	9.859	10.217	10.575	45 dB
	Δp [Pa]	6,80	6,80	6,70	6,60	6,50	6,50	6,40	6,40	6,30	6,30	6,30	6,20	6,20	
	Q [m ³ /h]	5.334	5.638	5.943	6.247	6.552	6.857	7.161	7.466	7.770	8.075	8.380	8.684	8.989	40 dB
	Δp [Pa]	4,90	4,90	4,80	4,80	4,70	4,70	4,70	4,60	4,60	4,60	4,50	4,50	4,50	
	Q [m ³ /h]	4.534	4.793	5.051	5.310	5.569	5.828	6.087	6.346	6.605	6.864	7.123	7.382	7.641	35 dB
	Δp [Pa]	3,60	3,50	3,50	3,50	3,40	3,40	3,40	3,30	3,30	3,30	3,30	3,30	3,20	
	Q [m ³ /h]	3.854	4.074	4.294	4.514	4.734	4.954	5.174	5.394	5.614	5.834	6.054	6.275	6.495	30 dB
	Δp [Pa]	2,60	2,60	2,50	2,50	2,50	2,40	2,40	2,40	2,40	2,40	2,40	2,40	2,30	
	Q [m ³ /h]	3.276	3.463	3.650	3.837	4.024	4.211	4.398	4.585	4.772	4.959	5.146	5.333	5.521	25 dB
	Δp [Pa]	1,90	1,80	1,80	1,80	1,80	1,80	1,80	1,70	1,70	1,70	1,70	1,70	1,70	

Hn\Wn [mm]	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500		
400	Sn [m ²]	0,2760	0,2920	0,3080	0,3230	0,3390	0,3550	0,3710	0,3870	0,4030	0,4190	0,4350	0,4510	0,4670	
	Sn [%]	77,00	77,00	77,00	77,00	77,00	77,00	77,00	77,00	78,00	78,00	78,00	78,00	78,00	
	Q [m ³ /h]	7.379	7.802	8.226	8.649	9.072	9.495	9.919	10.342	10.765	11.189	11.612	12.036	12.459	45 dB
	Δp [Pa]	5,30	5,20	5,20	5,10	5,00	5,00	5,00	4,90	4,90	4,80	4,80	4,80	4,70	
	Q [m ³ /h]	6.272	6.632	6.992	7.351	7.711	8.071	8.431	8.791	9.151	9.510	9.870	10.230	10.590	40 dB
	Δp [Pa]	3,80	3,80	3,70	3,70	3,60	3,60	3,60	3,50	3,50	3,50	3,50	3,40	3,40	
	Q [m ³ /h]	5.332	5.637	5.943	6.249	6.555	6.860	7.166	7.472	7.778	8.084	8.390	8.696	9.002	35 dB
	Δp [Pa]	2,80	2,70	2,70	2,70	2,60	2,60	2,60	2,60	2,50	2,50	2,50	2,50	2,50	
	Q [m ³ /h]	4.532	4.792	5.052	5.311	5.571	5.831	6.091	6.351	6.611	6.871	7.131	7.392	7.652	30 dB
	Δp [Pa]	2,00	2,00	1,90	1,90	1,90	1,90	1,90	1,90	1,80	1,80	1,80	1,80	1,80	
	Q [m ³ /h]	3.852	4.073	4.294	4.515	4.736	4.957	5.178	5.399	5.620	5.841	6.062	6.283	6.504	25 dB
	Δp [Pa]	1,40	1,40	1,40	1,40	1,40	1,40	1,30	1,30	1,30	1,30	1,30	1,30	1,30	
450	Sn [m ²]	0,3190	0,3370	0,3560	0,3740	0,3930	0,4110	0,4300	0,4480	0,4660	0,4850	0,5030	0,5220	0,5400	
	Sn [%]	79,00	79,00	79,00	79,00	79,00	79,00	80,00	80,00	80,00	80,00	80,00	80,00	80,00	
	Q [m ³ /h]	8.502	8.991	9.481	9.970	10.460	10.950	11.439	11.929	12.419	12.909	13.399	13.889	14.379	45 dB
	Δp [Pa]	4,30	4,20	4,20	4,10	4,10	4,00	4,00	3,90	3,90	3,90	3,80	3,80	3,80	
	Q [m ³ /h]	7.227	7.643	8.059	8.475	8.891	9.307	9.724	10.140	10.556	10.973	11.389	11.806	12.222	40 dB
	Δp [Pa]	3,10	3,10	3,00	3,00	2,90	2,90	2,90	2,80	2,80	2,80	2,80	2,80	2,70	
	Q [m ³ /h]	6.143	6.496	6.850	7.204	7.557	7.911	8.265	8.619	8.973	9.327	9.681	10.035	10.389	35 dB
	Δp [Pa]	2,30	2,20	2,20	2,20	2,10	2,10	2,10	2,10	2,00	2,00	2,00	2,00	2,00	
	Q [m ³ /h]	5.221	5.522	5.822	6.123	6.424	6.725	7.025	7.326	7.627	7.928	8.229	8.530	8.831	30 dB
	Δp [Pa]	1,60	1,60	1,60	1,60	1,50	1,50	1,50	1,50	1,50	1,50	1,50	1,40	1,40	
	Q [m ³ /h]	4.438	4.694	4.949	5.205	5.460	5.716	5.972	6.227	6.483	6.739	6.995	7.250	7.506	25 dB
	Δp [Pa]	1,20	1,20	1,10	1,10	1,10	1,10	1,10	1,10	1,10	1,10	1,00	1,00	1,00	
500	Sn [m ²]	0,3620	0,3830	0,4040	0,4250	0,4460	0,4670	0,4880	0,5090	0,5300	0,5510	0,5720	0,5920	0,6130	
	Sn [%]	80,00	81,00	81,00	81,00	81,00	81,00	81,00	81,00	81,00	82,00	82,00	82,00	82,00	
	Q [m ³ /h]	9.640	10.197	10.754	11.312	11.869	12.427	12.984	13.542	14.100	14.658	15.216	15.774	16.332	45 dB
	Δp [Pa]	3,60	3,50	3,50	3,40	3,40	3,30	3,30	3,30	3,20	3,20	3,20	3,20	3,10	
	Q [m ³ /h]	8.194	8.668	9.141	9.615	10.089	10.563	11.037	11.511	11.985	12.459	12.933	13.408	13.882	40 dB
	Δp [Pa]	2,60	2,60	2,50	2,50	2,40	2,40	2,40	2,40	2,30	2,30	2,30	2,30	2,30	
	Q [m ³ /h]	6.965	7.368	7.770	8.173	8.576	8.978	9.381	9.784	10.187	10.590	10.994	11.397	11.800	35 dB
	Δp [Pa]	1,90	1,90	1,80	1,80	1,80	1,70	1,70	1,70	1,70	1,70	1,70	1,60	1,60	
	Q [m ³ /h]	5.920	6.262	6.605	6.947	7.289	7.632	7.974	8.317	8.659	9.002	9.345	9.687	10.030	30 dB
	Δp [Pa]	1,40	1,30	1,30	1,30	1,30	1,30	1,20	1,20	1,20	1,20	1,20	1,20	1,20	
	Q [m ³ /h]	5.032	5.323	5.614	5.905	6.196	6.487	6.778	7.069	7.360	7.652	7.943	8.234	8.526	25 dB
	Δp [Pa]	1,00	1,00	1,00	0,90	0,90	0,90	0,90	0,90	0,90	0,90	0,90	0,90	0,90	

Hn\Wn [mm]	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500		
550	Sn [m ²]	0,4050	0,4290	0,4520	0,4760	0,4990	0,5220	0,5460	0,5690	0,5930	0,6160	0,6400	0,6630	0,6870	
	Sn [%]	82,00	82,00	82,00	82,00	82,00	83,00	83,00	83,00	83,00	83,00	83,00	83,00	83,00	
	Q [m ³ /h]	10.792	11.418	12.044	12.671	13.297	13.924	14.550	15.177	15.804	16.431	17.059	17.686	18.313	45 dB
	Δp [Pa]	3,10	3,00	3,00	2,90	2,90	2,90	2,80	2,80	2,80	2,70	2,70	2,70	2,70	
	Q [m ³ /h]	9.174	9.706	10.238	10.770	11.303	11.835	12.368	12.901	13.434	13.967	14.500	15.033	15.566	40 dB
	Δp [Pa]	2,20	2,20	2,20	2,10	2,10	2,10	2,00	2,00	2,00	2,00	2,00	1,90	1,90	
	Q [m ³ /h]	7.798	8.250	8.702	9.155	9.607	10.060	10.513	10.966	11.419	11.872	12.325	12.778	13.231	35 dB
	Δp [Pa]	1,60	1,60	1,60	1,50	1,50	1,50	1,50	1,50	1,40	1,40	1,40	1,40	1,40	
	Q [m ³ /h]	6.628	7.012	7.397	7.782	8.166	8.551	8.936	9.321	9.706	10.091	10.476	10.862	11.247	30 dB
	Δp [Pa]	1,20	1,10	1,10	1,10	1,10	1,10	1,10	1,10	1,00	1,00	1,00	1,00	1,00	
Q [m ³ /h]	5.634	5.961	6.287	6.614	6.941	7.268	7.596	7.923	8.250	8.578	8.905	9.232	9.560	25 dB	
Δp [Pa]	0,80	0,80	0,80	0,80	0,80	0,80	0,80	0,80	0,80	0,70	0,70	0,70	0,70		
600	Sn [m ²]	0,4480	0,4740	0,5000	0,5260	0,5520	0,5780	0,6040	0,6300	0,6560	0,6820	0,7080	0,7340	0,7600	
	Sn [%]	83,00	83,00	83,00	84,00	84,00	84,00	84,00	84,00	84,00	84,00	84,00	84,00	84,00	
	Q [m ³ /h]	11.957	12.653	13.349	14.045	14.742	15.439	16.136	16.833	17.530	18.227	18.925	19.623	20.321	45 dB
	Δp [Pa]	2,70	2,70	2,60	2,60	2,50	2,50	2,40	2,40	2,40	2,40	2,30	2,30	2,30	
	Q [m ³ /h]	10.163	10.755	11.347	11.938	12.531	13.123	13.715	14.308	14.901	15.493	16.086	16.679	17.273	40 dB
	Δp [Pa]	2,00	1,90	1,90	1,80	1,80	1,80	1,80	1,70	1,70	1,70	1,70	1,70	1,70	
	Q [m ³ /h]	8.639	9.142	9.645	10.148	10.651	11.154	11.658	12.162	12.666	13.170	13.674	14.178	14.682	35 dB
	Δp [Pa]	1,40	1,40	1,40	1,30	1,30	1,30	1,30	1,30	1,20	1,20	1,20	1,20	1,20	
	Q [m ³ /h]	7.343	7.770	8.198	8.626	9.053	9.481	9.909	10.338	10.766	11.194	11.623	12.051	12.480	30 dB
	Δp [Pa]	1,00	1,00	1,00	1,00	0,90	0,90	0,90	0,90	0,90	0,90	0,90	0,90	0,90	
Q [m ³ /h]	6.242	6.605	6.968	7.332	7.695	8.059	8.423	8.787	9.151	9.515	9.879	10.243	10.608	25 dB	
Δp [Pa]	0,70	0,70	0,70	0,70	0,70	0,70	0,70	0,70	0,70	0,60	0,60	0,60	0,60		
650	Sn [m ²]	0,4920	0,5200	0,5490	0,5770	0,6050	0,6340	0,6620	0,6910	0,7190	0,7480	0,7760	0,8050	0,8330	
	Sn [%]	84,00	84,00	84,00	85,00	85,00	85,00	85,00	85,00	85,00	85,00	85,00	85,00	85,00	
	Q [m ³ /h]	13.132	13.899	14.666	15.433	16.201	16.969	17.738	18.506	19.275	20.044	20.813	21.582	22.351	45 dB
	Δp [Pa]	2,40	2,40	2,30	2,30	2,20	2,20	2,20	2,10	2,10	2,10	2,10	2,00	2,00	
	Q [m ³ /h]	11.162	11.814	12.466	13.119	13.771	14.424	15.077	15.730	16.384	17.037	17.691	18.345	18.999	40 dB
	Δp [Pa]	1,70	1,70	1,70	1,60	1,60	1,60	1,60	1,50	1,50	1,50	1,50	1,50	1,50	
	Q [m ³ /h]	9.488	10.042	10.596	11.151	11.706	12.260	12.816	13.371	13.926	14.482	15.037	15.593	16.149	35 dB
	Δp [Pa]	1,30	1,20	1,20	1,20	1,20	1,10	1,10	1,10	1,10	1,10	1,10	1,10	1,10	
	Q [m ³ /h]	8.065	8.536	9.007	9.478	9.950	10.421	10.893	11.365	11.837	12.310	12.782	13.254	13.727	30 dB
	Δp [Pa]	0,90	0,90	0,90	0,90	0,80	0,80	0,80	0,80	0,80	0,80	0,80	0,80	0,80	
Q [m ³ /h]	6.855	7.256	7.656	8.057	8.457	8.858	9.259	9.661	10.062	10.463	10.865	11.266	11.668	25 dB	
Δp [Pa]	0,70	0,60	0,60	0,60	0,60	0,60	0,60	0,60	0,60	0,60	0,60	0,60	0,50		

Hn\Wn [mm]	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500		
700	Sn [m ²]	0,5350	0,5660	0,5970	0,6280	0,6590	0,6900	0,7210	0,7510	0,7820	0,8130	0,8440	0,8750	0,9060	
	Sn [%]	85,00	85,00	85,00	85,00	86,00	86,00	86,00	86,00	86,00	86,00	86,00	86,00	86,00	
	Q [m ³ /h]	14.317	15.156	15.995	16.834	17.674	18.515	19.355	20.196	21.037	21.878	22.720	23.562	24.403	45 dB
	Δp [Pa]	2,20	2,10	2,10	2,00	2,00	2,00	1,90	1,90	1,90	1,90	1,80	1,80	1,80	
	Q [m ³ /h]	12.170	12.883	13.596	14.309	15.023	15.737	16.452	17.167	17.882	18.597	19.312	20.027	20.743	40 dB
	Δp [Pa]	1,60	1,50	1,50	1,50	1,40	1,40	1,40	1,40	1,40	1,30	1,30	1,30	1,30	
	Q [m ³ /h]	10.344	10.950	11.556	12.163	12.770	13.377	13.984	14.592	15.199	15.807	16.415	17.023	17.632	35 dB
	Δp [Pa]	1,10	1,10	1,10	1,10	1,00	1,00	1,00	1,00	1,00	1,00	1,00	0,90	0,90	
	Q [m ³ /h]	8.793	9.308	9.823	10.339	10.854	11.370	11.887	12.403	12.920	13.436	13.953	14.470	14.987	30 dB
	Δp [Pa]	0,80	0,80	0,80	0,80	0,80	0,70	0,70	0,70	0,70	0,70	0,70	0,70	0,70	
	Q [m ³ /h]	7.474	7.912	8.350	8.788	9.226	9.665	10.104	10.543	10.982	11.421	11.860	12.300	12.739	25 dB
	Δp [Pa]	0,60	0,60	0,60	0,60	0,50	0,50	0,50	0,50	0,50	0,50	0,50	0,50	0,50	
750	Sn [m ²]	0,5780	0,6110	0,6450	0,6780	0,7120	0,7450	0,7790	0,8120	0,8460	0,8790	0,9130	0,9460	0,9790	
	Sn [%]	86,00	86,00	86,00	86,00	86,00	86,00	87,00	87,00	87,00	87,00	87,00	87,00	87,00	
	Q [m ³ /h]	15.511	16.422	17.334	18.247	19.159	20.073	20.987	21.901	22.815	23.730	24.645	25.560	26.475	45 dB
	Δp [Pa]	2,00	1,90	1,90	1,80	1,80	1,80	1,70	1,70	1,70	1,70	1,60	1,60	1,60	
	Q [m ³ /h]	13.185	13.959	14.734	15.510	16.286	17.062	17.839	18.616	19.393	20.170	20.948	21.726	22.504	40 dB
	Δp [Pa]	1,40	1,40	1,40	1,30	1,30	1,30	1,30	1,20	1,20	1,20	1,20	1,20	1,20	
	Q [m ³ /h]	11.207	11.865	12.524	13.183	13.843	14.503	15.163	15.823	16.484	17.145	17.806	18.467	19.129	35 dB
	Δp [Pa]	1,00	1,00	1,00	1,00	0,90	0,90	0,90	0,90	0,90	0,90	0,90	0,90	0,80	
	Q [m ³ /h]	9.526	10.086	10.646	11.206	11.767	12.327	12.889	13.450	14.012	14.573	15.135	15.697	16.259	30 dB
	Δp [Pa]	0,70	0,70	0,70	0,70	0,70	0,70	0,70	0,60	0,60	0,60	0,60	0,60	0,60	
	Q [m ³ /h]	8.097	8.573	9.049	9.525	10.002	10.478	10.955	11.433	11.910	12.387	12.865	13.343	13.821	25 dB
	Δp [Pa]	0,50	0,50	0,50	0,50	0,50	0,50	0,50	0,50	0,50	0,50	0,40	0,40	0,40	
800	Sn [m ²]	0,6210	0,6570	0,6930	0,7290	0,7650	0,8010	0,8370	0,8730	0,9090	0,9450	0,9810	1,0170	1,0530	
	Sn [%]	86,00	86,00	87,00	87,00	87,00	87,00	87,00	87,00	87,00	87,00	88,00	88,00	88,00	
	Q [m ³ /h]	16.713	17.698	18.683	19.669	20.656	21.643	22.631	23.619	24.607	25.596	26.585	27.575	28.565	45 dB
	Δp [Pa]	1,80	1,80	1,70	1,70	1,60	1,60	1,60	1,60	1,50	1,50	1,50	1,50	1,50	
	Q [m ³ /h]	14.206	15.043	15.881	16.719	17.558	18.397	19.236	20.076	20.916	21.757	22.598	23.439	24.280	40 dB
	Δp [Pa]	1,30	1,30	1,20	1,20	1,20	1,20	1,10	1,10	1,10	1,10	1,10	1,10	1,10	
	Q [m ³ /h]	12.075	12.787	13.499	14.211	14.924	15.637	16.351	17.065	17.779	18.494	19.208	19.923	20.638	35 dB
	Δp [Pa]	0,90	0,90	0,90	0,90	0,90	0,80	0,80	0,80	0,80	0,80	0,80	0,80	0,80	
	Q [m ³ /h]	10.264	10.869	11.474	12.080	12.685	13.292	13.898	14.505	15.112	15.720	16.327	16.935	17.543	30 dB
	Δp [Pa]	0,70	0,70	0,60	0,60	0,60	0,60	0,60	0,60	0,60	0,60	0,60	0,60	0,60	
	Q [m ³ /h]	8.725	9.239	9.753	10.268	10.783	11.298	11.814	12.330	12.846	13.362	13.878	14.395	14.911	25 dB
	Δp [Pa]	0,50	0,50	0,50	0,50	0,40	0,40	0,40	0,40	0,40	0,40	0,40	0,40	0,40	

Hn\Wn [mm]	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500		
850	Sn [m ²]	0,6640	0,7030	0,7410	0,7800	0,8180	0,8570	0,8950	0,9340	0,9720	1,0100	1,0490	1,0870	1,1260	
	Sn [%]	87,00	87,00	87,00	87,00	88,00	88,00	88,00	88,00	88,00	88,00	88,00	88,00	88,00	
	Q [m ³ /h]	17.922	18.981	20.040	21.101	22.162	23.224	24.287	25.350	26.413	27.477	28.541	29.606	30.671	45 dB
	Δp [Pa]	1,70	1,60	1,60	1,50	1,50	1,50	1,50	1,40	1,40	1,40	1,40	1,40	1,30	
	Q [m ³ /h]	15.234	16.134	17.034	17.936	18.838	19.741	20.644	21.547	22.451	23.355	24.260	25.165	26.070	40 dB
	Δp [Pa]	1,20	1,20	1,10	1,10	1,10	1,10	1,10	1,00	1,00	1,00	1,00	1,00	1,00	
	Q [m ³ /h]	12.949	13.714	14.479	15.246	16.012	16.780	17.547	18.315	19.084	19.852	20.621	21.390	22.160	35 dB
	Δp [Pa]	0,90	0,80	0,80	0,80	0,80	0,80	0,80	0,70	0,70	0,70	0,70	0,70	0,70	
	Q [m ³ /h]	11.007	11.657	12.308	12.959	13.611	14.263	14.915	15.568	16.221	16.875	17.528	18.182	18.836	30 dB
	Δp [Pa]	0,60	0,60	0,60	0,60	0,60	0,60	0,60	0,50	0,50	0,50	0,50	0,50	0,50	
	Q [m ³ /h]	9.356	9.908	10.462	11.015	11.569	12.123	12.678	13.233	13.788	14.344	14.899	15.455	16.011	25 dB
	Δp [Pa]	0,50	0,40	0,40	0,40	0,40	0,40	0,40	0,40	0,40	0,40	0,40	0,40	0,40	
900	Sn [m ²]	0,7080	0,7490	0,7900	0,8300	0,8710	0,9120	0,9530	0,9940	1,0350	1,0760	1,1170	1,1580	1,1990	
	Sn [%]	87,00	88,00	88,00	88,00	88,00	88,00	88,00	88,00	88,00	89,00	89,00	89,00	89,00	
	Q [m ³ /h]	19.137	20.271	21.406	22.541	23.678	24.815	25.953	27.092	28.231	29.370	30.511	31.651	32.792	45 dB
	Δp [Pa]	1,60	1,50	1,50	1,40	1,40	1,40	1,30	1,30	1,30	1,30	1,30	1,20	1,20	
	Q [m ³ /h]	16.267	17.231	18.195	19.160	20.126	21.093	22.060	23.028	23.996	24.965	25.934	26.904	27.873	40 dB
	Δp [Pa]	1,10	1,10	1,10	1,00	1,00	1,00	1,00	1,00	0,90	0,90	0,90	0,90	0,90	
	Q [m ³ /h]	13.827	14.646	15.466	16.286	17.108	17.929	18.751	19.574	20.397	21.220	22.044	22.868	23.693	35 dB
	Δp [Pa]	0,80	0,80	0,80	0,80	0,70	0,70	0,70	0,70	0,70	0,70	0,70	0,70	0,60	
	Q [m ³ /h]	11.753	12.449	13.146	13.844	14.542	15.240	15.939	16.638	17.338	18.038	18.738	19.438	20.139	30 dB
	Δp [Pa]	0,60	0,60	0,60	0,50	0,50	0,50	0,50	0,50	0,50	0,50	0,50	0,50	0,50	
	Q [m ³ /h]	9.990	10.582	11.174	11.767	12.360	12.954	13.548	14.142	14.737	15.332	15.927	16.523	17.118	25 dB
	Δp [Pa]	0,40	0,40	0,40	0,40	0,40	0,40	0,40	0,40	0,40	0,30	0,30	0,30	0,30	
950	Sn [m ²]	0,7510	0,7940	0,8380	0,8810	0,9250	0,9680	1,0120	1,0550	1,0980	1,1420	1,1850	1,2290	1,2720	
	Sn [%]	88,00	88,00	88,00	88,00	88,00	89,00	89,00	89,00	89,00	89,00	89,00	89,00	89,00	
	Q [m ³ /h]	20.359	21.568	22.778	23.990	25.202	26.416	27.630	28.844	30.060	31.276	32.493	33.710	34.927	45 dB
	Δp [Pa]	1,50	1,40	1,40	1,30	1,30	1,30	1,30	1,20	1,20	1,20	1,20	1,20	1,10	
	Q [m ³ /h]	17.305	18.333	19.362	20.391	21.422	22.453	23.485	24.518	25.551	26.585	27.619	28.654	29.688	40 dB
	Δp [Pa]	1,10	1,00	1,00	1,00	0,90	0,90	0,90	0,90	0,90	0,90	0,80	0,80	0,80	
	Q [m ³ /h]	14.710	15.583	16.458	17.333	18.209	19.085	19.963	20.840	21.719	22.597	23.476	24.356	25.235	35 dB
	Δp [Pa]	0,80	0,70	0,70	0,70	0,70	0,70	0,70	0,60	0,60	0,60	0,60	0,60	0,60	
	Q [m ³ /h]	12.503	13.246	13.989	14.733	15.478	16.223	16.968	17.714	18.461	19.208	19.955	20.702	21.450	30 dB
	Δp [Pa]	0,60	0,50	0,50	0,50	0,50	0,50	0,50	0,50	0,50	0,40	0,40	0,40	0,40	
	Q [m ³ /h]	10.628	11.259	11.891	12.523	13.156	13.789	14.423	15.057	15.692	16.327	16.962	17.597	18.233	25 dB
	Δp [Pa]	0,40	0,40	0,40	0,40	0,40	0,30	0,30	0,30	0,30	0,30	0,30	0,30	0,30	

Hn\Wn [mm]	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500		
1000	Sn [m ²]	0,7940	0,8400	0,8860	0,9320	0,9780	1,0240	1,0700	1,1160	1,1620	1,2080	1,2540	1,2990	1,3450	
	Sn [%]	88,00	88,00	89,00	89,00	89,00	89,00	89,00	89,00	89,00	89,00	90,00	90,00	90,00	
	Q [m ³ /h]	21.586	22.871	24.158	25.445	26.734	28.024	29.315	30.607	31.900	33.193	34.487	35.781	37.076	45 dB
	Δp [Pa]	1,40	1,30	1,30	1,30	1,20	1,20	1,20	1,20	1,10	1,10	1,10	1,10	1,10	
	Q [m ³ /h]	18.348	19.441	20.534	21.629	22.724	23.821	24.918	26.016	27.115	28.214	29.314	30.414	31.515	40 dB
	Δp [Pa]	1,00	1,00	0,90	0,90	0,90	0,90	0,80	0,80	0,80	0,80	0,80	0,80	0,80	
	Q [m ³ /h]	15.596	16.525	17.454	18.385	19.316	20.248	21.181	22.114	23.048	23.982	24.917	25.852	26.788	35 dB
	Δp [Pa]	0,70	0,70	0,70	0,70	0,60	0,60	0,60	0,60	0,60	0,60	0,60	0,60	0,60	
	Q [m ³ /h]	13.257	14.046	14.836	15.627	16.419	17.211	18.004	18.797	19.591	20.385	21.180	21.974	22.770	30 dB
	Δp [Pa]	0,50	0,50	0,50	0,50	0,50	0,50	0,40	0,40	0,40	0,40	0,40	0,40	0,40	
	Q [m ³ /h]	11.268	11.939	12.611	13.283	13.956	14.629	15.303	15.978	16.652	17.327	18.003	18.678	19.354	25 dB
	Δp [Pa]	0,40	0,40	0,40	0,30	0,30	0,30	0,30	0,30	0,30	0,30	0,30	0,30	0,30	

Every air flow lower than the above mentioned maximum value, will meet the listed A-weighted sound power level for the respective dimension. More information on sound power can be found in the product information on our website (documents).

Sample order

CU2	200	200	PG30	PM	CFTH	FDCU
1	2	3	4	5	6	7

1. product
2. width
3. height
4. frame on the side of the mechanism
5. frame on the side of the wall
6. mechanism type
7. option: unipolar end of range switch

Approvals and certificates

All our dampers are submitted to a number of tests by official test institutes. Reports of these tests form the basis for the approvals of our dampers.



0749-CPR-BC1-606-0464-15650.03-0464&2517



18.12

NF 537
CLAPETS RÉSISTANT AU FEU
VOLETS RÉSISTANT AU FEU
www.marque-nf.com



26813



W-336769-20-Zd



2822-UKCA-CPR-0057

The NF-label guarantees: conformity with the standard NF S 61-937 Parts 1 and 5: "Systèmes de Sécurité Incendie Dispositifs Actionnés de Sécurité"; conformity with the national decree of March 22, 2004, changed on 14 March 2011 for the classification of fire resistance; the values of the characteristics mentioned in this document. Organisme Certificateur: AFNOR Certification, 11 Rue Francis de Pressensé, F93571 La Plaine Saint-Denis Cedex; Website: <http://www.afnor.org> and <http://www.marque-nf.com>; Phone: +33 (0)1.41.62.80.00, Fax: +33 (0)1.49.17.90.00, Email: certification@afnor.org