



Anslut GOLD till INSIDE Cloud

Vilka produkter är INSIDE Ready?

GOLD-aggregat producerade vecka 22, 2023 eller senare.

- Mjukvaruversion 2.41 eller senare
- Certifikat installerade i produktion på produkter producerade från vecka 22, 2023

Retrofit

- Mjukvaruversion 2.42 eller senare
- GOLD version E / F




Hur kopplas ett GOLD-
aggregat upp?

Koppla upp GOLD till internet


1. Ethernet-anslutning

Anslut ena änden av nätverkskabeln till anläggningens befintliga nätverk och den andra änden av kabeln till luftbehandlingsaggregatet (IQLogic).

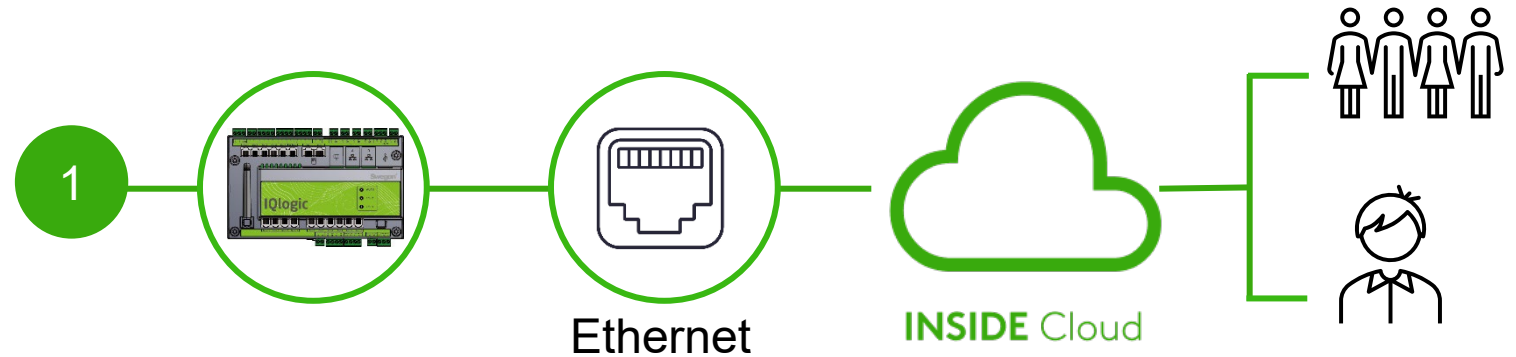

2. Mobilt nätverk

Använd en 4G-router med SIM-kort, speciellt utvecklat för detta ändamål.

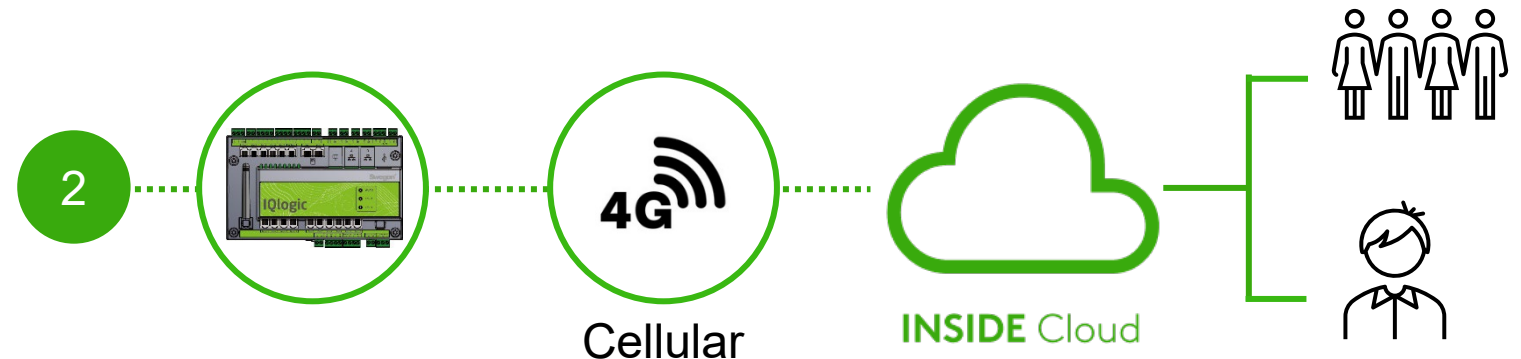


Aktivera Swegon INSIDE på HMI/Web



Gå till "Kommunikation"

Kontrollera att följande fält är korrekt ifyllda:

- IP-adress, Nätmask, Standard gateway, Primär DNS
- Produktens serienummer

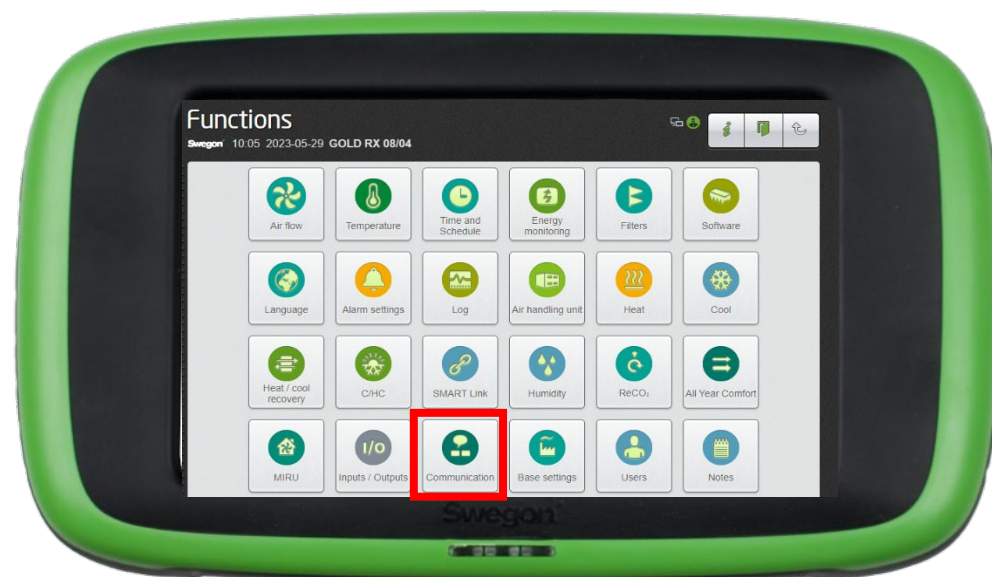

INSIDE Connect – Exempel på IP-inställningar

IP-inställningarna för routern görs i INSIDE Portal

IP-inställningar på GOLD (görs i IQnavigator eller via IQlogics webbgränssnitt)

Router ansluten till port A på GOLD IQlogic

Routerinställning:

IP: 169.254.234.10

Nätmask: 255.255.255.0

GOLD-inställning:

IP: 169.254.234.1 (standard)

Nätmask: 255.255.255.0

Router ansluten till port B på GOLD IQlogic

Routerinställning:

IP: 10.200.1.250

Nätmask: 255.255.255.0


GOLD-inställning:

GOLD nr. 1: IP: 10.200.1.1 (standard)

GOLD nr. 2: IP: 10.200.1.2 och så vidare...

Nätmask: 255.255.255.0

IP-inställningar i HMI/Web

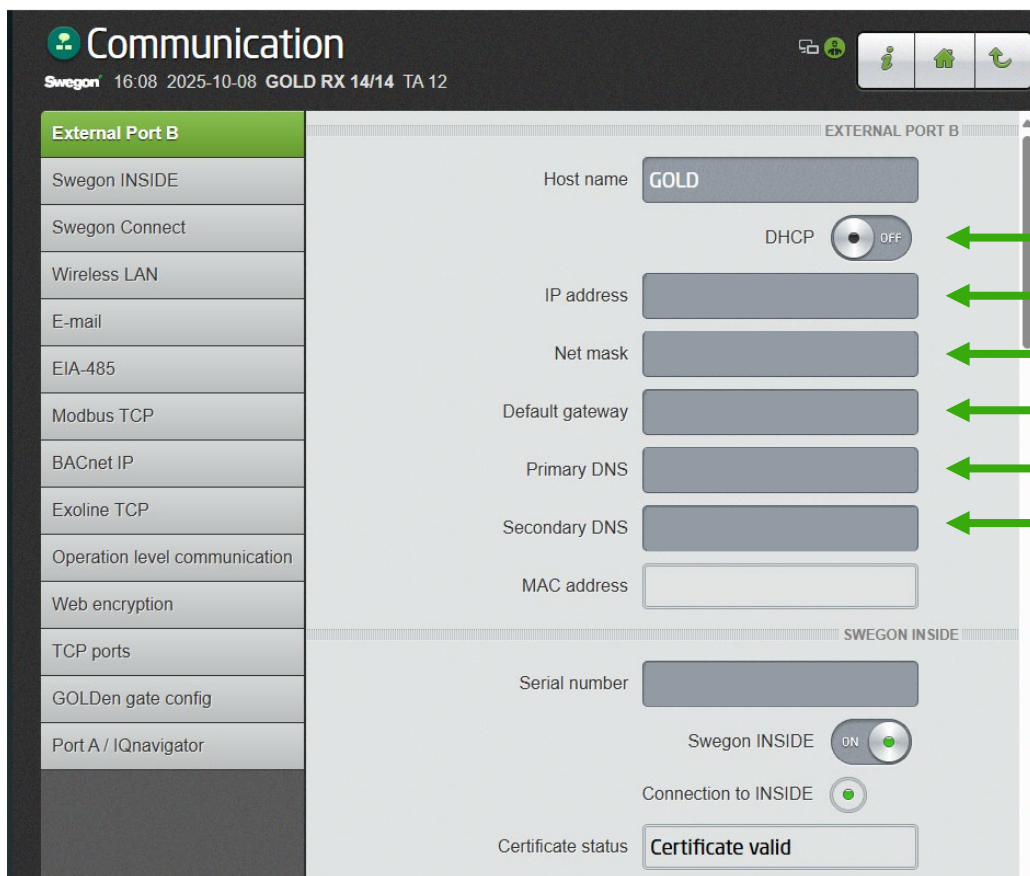

Communication
Swegon 16:08 2025-10-08 GOLD RX 14/14 TA 12

External Port B

Swegon INSIDE

Swegon Connect

Wireless LAN

E-mail

EIA-485

Modbus TCP

BACnet IP

Exoline TCP

Operation level communication

Web encryption

TCP ports

GOLDen gate config

Port A / IQnavigator

EXTERNAL PORT B

Host name: GOLD

DHCP: OFF

IP address

Net mask

Default gateway

Primary DNS

Secondary DNS

MAC address

SWEGON INSIDE

Serial number

Swegon INSIDE: ON

Connection to INSIDE

Certificate status: Certificate valid

← Måste vara AV om INSIDE Connect-routern används.

← Enhetens IP-adress

← Måste vara densamma som för INSIDE Connect-routern/gatewayen i nätverket

← För att skicka data via INSIDE Connect-routern, ange routerns IP-adress.

← Använd "8.8.8.8"

← Använd "8.8.4.4"

Skapa ett konto

- Gå till [Swegons hemsida](#)
 - Support & software → Uppkopplade produkter
- 1 Begär åtkomst till INSIDE Portal
- 2 Fyll i formuläret och klicka “Skicka”
 - Invänta sedan mail med inbjudan till INSIDE Portal

Kom igång!

1. Begär åtkomst till INSIDE Portal ▼

2. Lägg till produkter i INSIDE Portal/Gör din produkt INSIDE Ready (endast för retrofit) ▼

3. Gå till INSIDE Portal ▼

Kom igång!

1. Begär tillgång till INSIDE Portal ^

Ange uppgifterna nedan för att begära ett konto.

Om du redan har ett konto och vill lägga till en ny produkt eller byggnad, kontakta digitalservices@swegon.com

Kontoinformation

Email (används som användarnamn)*

Förnamn*

Efternamn*

Företag*

Byggnads- och produktinformation

Välj produkt*

Produktens serienummer*

Byggnadens namn*

Byggnadens adress*

Ort*

Land*

Din integritet är viktig för oss. Swegon använder dina uppgifter till att förse dig med information om den begärda tjänsten. Du kan avregistrera dig från denna kommunikation när som helst. För mer information, se vår integritetspolicy.


skyddas av reCAPTCHA
 Integritet - Villkor

SKICKA

1. Logga in på INSIDE Portal

Swegon INSIDE Portal

- <https://inside.swegon.com>

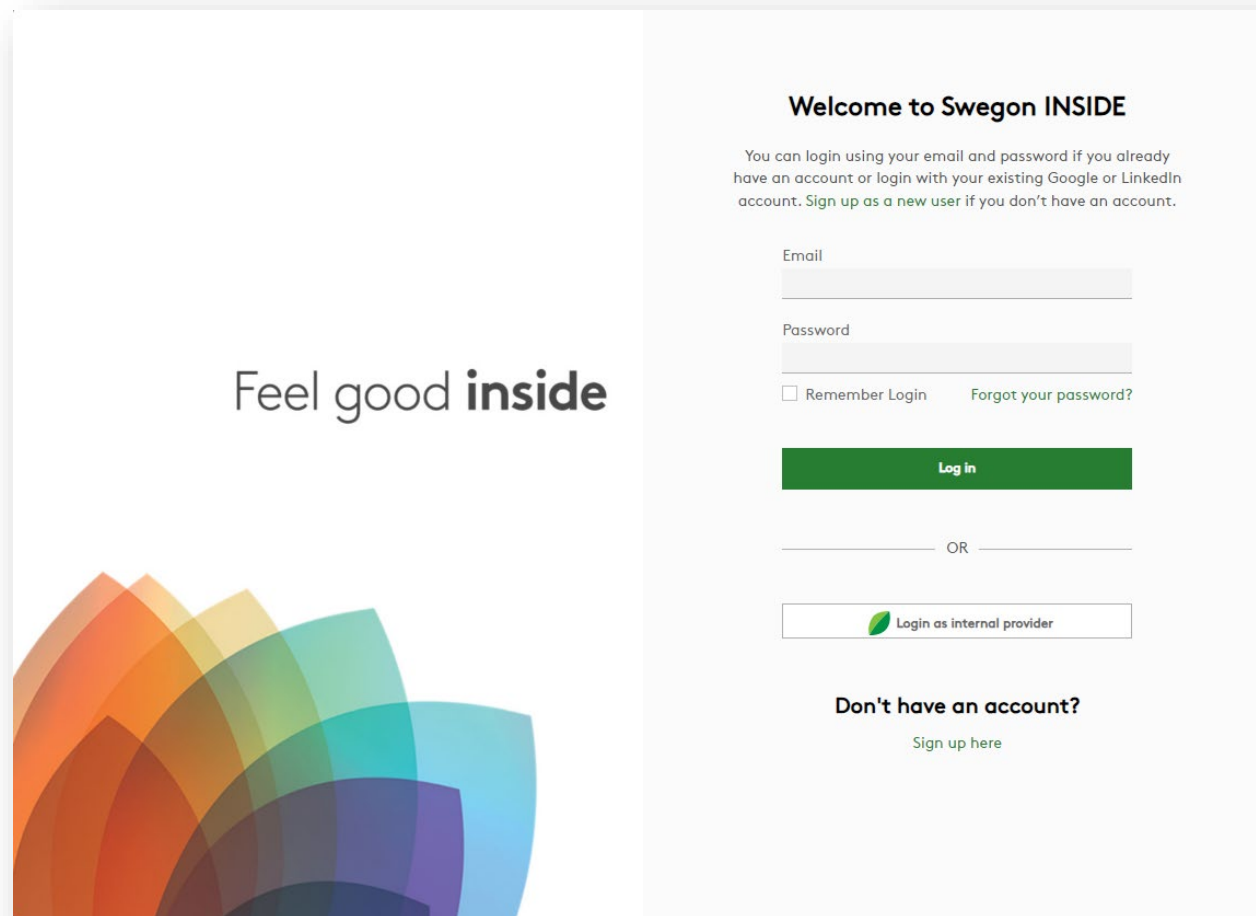

The image shows the login page for the Swegon INSIDE Portal. On the left, there is a large graphic with the text "Feel good **inside**" and a colorful, abstract shape composed of overlapping semi-circles in shades of orange, yellow, green, and blue. On the right, the page is titled "Welcome to Swegon INSIDE". Below the title, there is a paragraph explaining the login options: "You can login using your email and password if you already have an account or login with your existing Google or LinkedIn account. Sign up as a new user if you don't have an account." The login form includes fields for "Email" and "Password", a checkbox for "Remember Login", and a link for "Forgot your password?". A green "Log in" button is positioned below the form. Below the button, there is a horizontal line with "OR" in the center. Underneath, there is a button labeled "Login as internal provider" with a small green leaf icon. At the bottom, there is a section titled "Don't have an account?" with a link "Sign up here".

Welcome to Swegon INSIDE

You can login using your email and password if you already have an account or login with your existing Google or LinkedIn account. Sign up as a new user if you don't have an account.

Email

Password

☐ Remember Login [Forgot your password?](#)

Log in

OR

 Login as internal provider

Don't have an account?

[Sign up here](#)

2. Gå till byggnadssidan

Home > Organisations > Company Name

GO BACK

EDIT ORGANISATION

Company Name

Buildings

Search for building name

Name	City	Country	Number of products	Role
Head Office	Stockholm	Sweden	0	Organisation Admin

Rows per page: 100 1-1 of 1


Organisation administrators

App users

3. Tryck på "Claim product/Lägg till produkt"

The screenshot displays the Swegon web interface for a building named 'Head Office'. The breadcrumb navigation at the top reads 'Home > Buildings > Head Office'. A 'GO BACK' link is visible. On the left, a map shows the location of 'Head Office' in Gamla stan, Stockholm, with a green pin and a red dashed circle. Below the map, the text 'Head Office' and 'Organisation: Company Name' is shown. The main content area is titled 'Products' and features a search bar with the placeholder text 'Search (name, serial number)'. A green button labeled '+ CLAIM PRODUCT' is highlighted with an orange circle. Below the search bar, a table header lists columns: Name ↑, Product type, Building, Serial number, Software version, Active alarm, INSIDE Cloud, and INSIDE Connect. The table body contains the message 'There are no products in the building'. At the bottom right of the table, it says 'Rows per page: 100' and '0-0 of 0'. Below the table, there are three expandable sections: 'INSIDE Connect routers', 'Building administrators', and 'Settings'.

4. Ge din produkt ett nytt namn och välj rätt produktfamilj och serienummer. Det korrekta serienumret behövs för att kunna koppla upp enheten och se livedata.

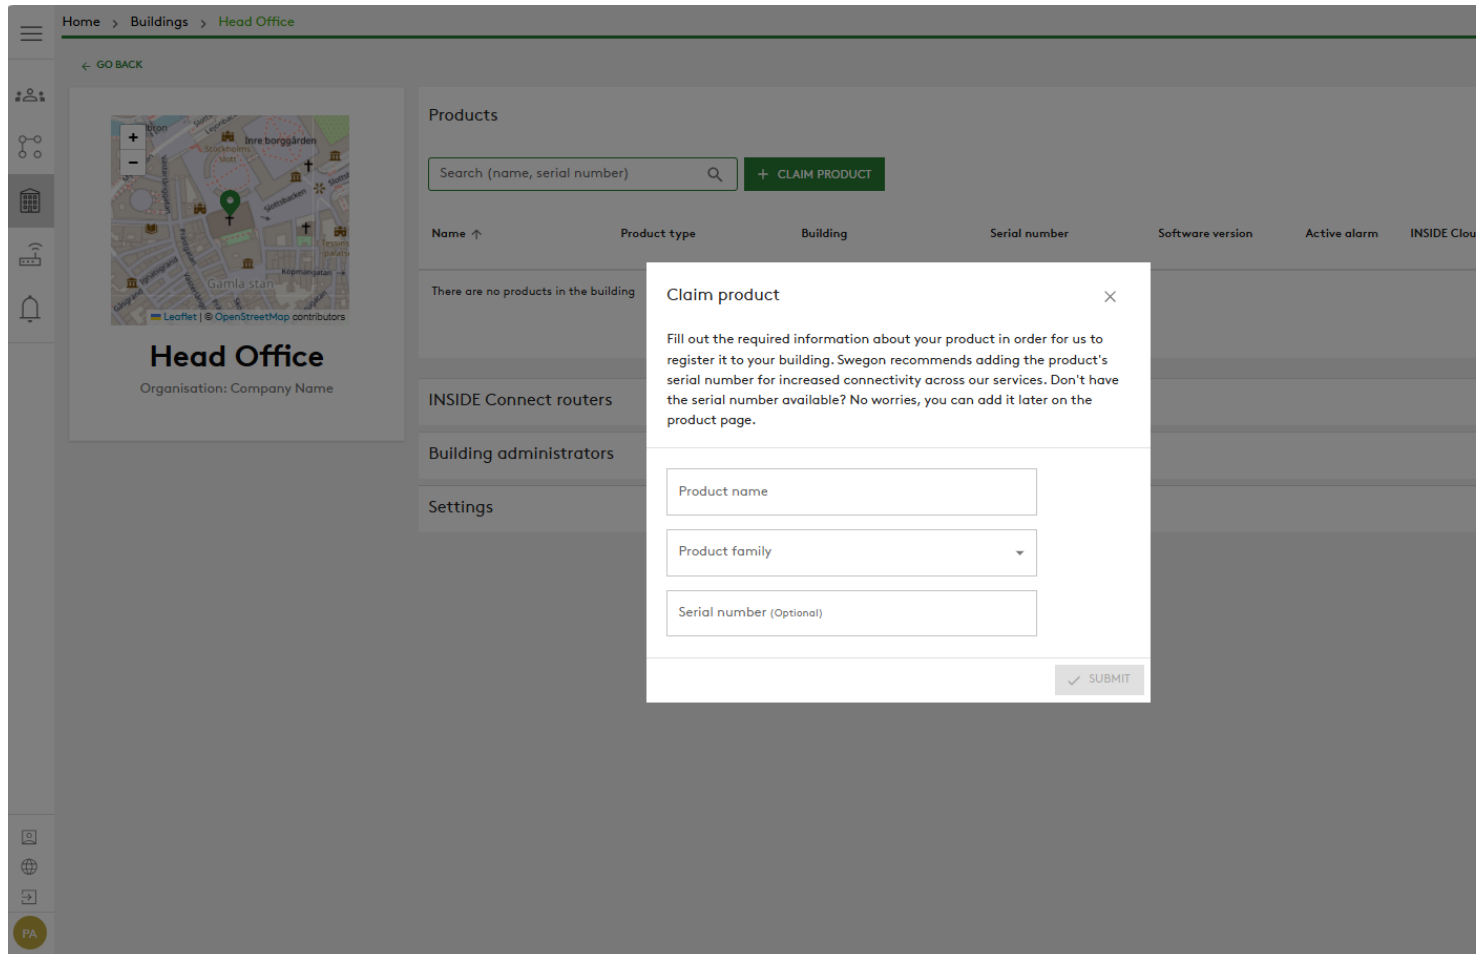

The screenshot shows the Swegon web interface. The breadcrumb navigation at the top reads "Home > Buildings > Head Office". On the left sidebar, there is a "GO BACK" button and a map of "Head Office" with the text "Organisation: Company Name". The main content area is titled "Products" and contains a search bar labeled "Search (name, serial number)" and a "+ CLAIM PRODUCT" button. Below the search bar is a table with columns: Name ↑, Product type, Building, Serial number, Software version, Active alarm, and INSIDE Cloud. The table currently shows "There are no products in the building". A modal form titled "Claim product" is open in the center. It contains the following text: "Fill out the required information about your product in order for us to register it to your building. Swegon recommends adding the product's serial number for increased connectivity across our services. Don't have the serial number available? No worries, you can add it later on the product page." The form has three input fields: "Product name", "Product family" (a dropdown menu), and "Serial number (Optional)". At the bottom right of the modal is a "SUBMIT" button with a checkmark icon.

4b.

Om produkten redan är ansluten till INSIDE Cloud måste du ange produktens MAC-adress för att kunna lägga till den.

The image shows the 'Communication' configuration page of a Swegon device. The left sidebar lists various communication options, with 'External Port B' selected. The main area is divided into two sections: 'EXTERNAL PORT B' and 'SWEGON INSIDE'. In the 'EXTERNAL PORT B' section, the 'MAC address' field is highlighted with an orange circle and contains the value '00:1A:2B:3C:4D:5E'. Other fields in this section include 'Host name' (GOLD), 'DHCP' (OFF), 'IP address', 'Net mask', 'Default gateway', 'Primary DNS', and 'Secondary DNS'. The 'SWEGON INSIDE' section includes a 'Serial number' field, a 'Swegon INSIDE' toggle (ON), a 'Connection to INSIDE' status indicator (ON), and a 'Certificate status' field showing 'Certificate valid'.

Section	Field	Value
EXTERNAL PORT B	Host name	GOLD
	DHCP	OFF
	IP address	
	Net mask	
	Default gateway	
	Primary DNS	
	Secondary DNS	
SWEGON INSIDE	MAC address	00:1A:2B:3C:4D:5E
	Serial number	
	Swegon INSIDE	ON
	Connection to INSIDE	ON
	Certificate status	Certificate valid

6. Nu har du framgångsrikt lagt till din produkt.

Home > Buildings > Head Office

GO BACK



Head Office
Organisation: Company Name

Products

Name ↑	Product type	Building	Serial number	Software version	Active alarm	INSIDE Cloud	INSIDE Connect
GOLD 1	GOLD ver. F RX/HC	Head Office					CONNECT 30 MIN

Rows per page: 100

1-1 of 1

<

>

INSIDE Connect routers


Building administrators

Active alarms

Settings

PA

7. Om din produkt inte är ansluten till INSIDE Cloud (som visas nedan med det röda molnsymbolen) måste du kontrollera att
- Swegon INSIDE är aktiverat på produkten
 - den har ett giltigt certifikat (INSIDE Ready)
 - produkten serienummer är inmatat i INSIDE Portal

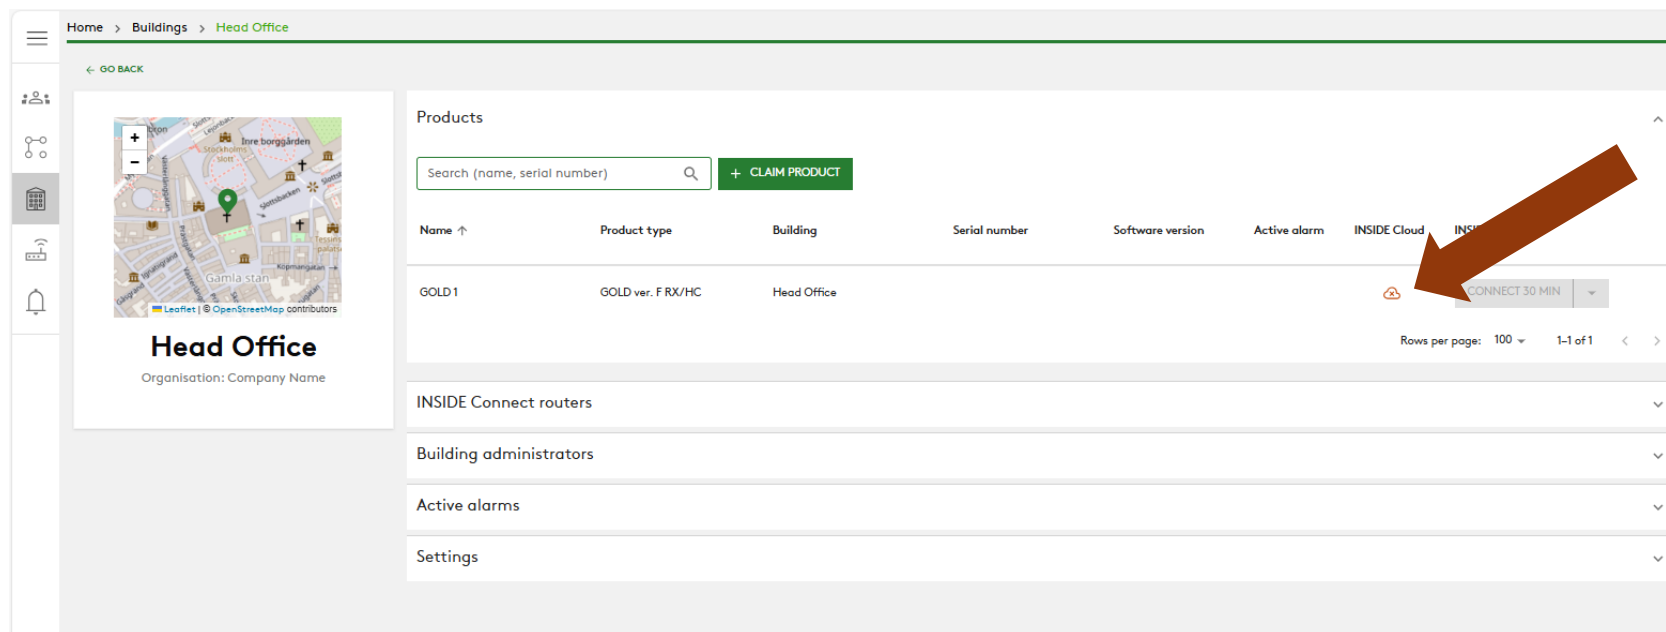

The screenshot shows the 'Head Office' page in the Swegon INSIDE Portal. On the left is a map of Stockholm with a location pin. The main area is titled 'Products' and contains a table with one product listed. A red cloud icon in the 'INSIDE Cloud' column indicates the product is not connected. A large red arrow points to this icon. Below the table are links for 'INSIDE Connect routers', 'Building administrators', 'Active alarms', and 'Settings'.

Home > Buildings > Head Office

GO BACK

Head Office
Organisation: Company Name

Products

Search (name, serial number) + CLAIM PRODUCT

Name ↑	Product type	Building	Serial number	Software version	Active alarm	INSIDE Cloud	INSIDE Connect
GOLD 1	GOLD ver. F RX/HC	Head Office					CONNECT 30 MIN

Rows per page: 100 1-1 of 1

INSIDE Connect routers

Building administrators

Active alarms



Settings



Om din produkt saknar giltigt certifikat:
Så här gör du din produkt INSIDE Ready
(Retrofit)


Se till att du har SW 2.42 eller senare

Retrofit

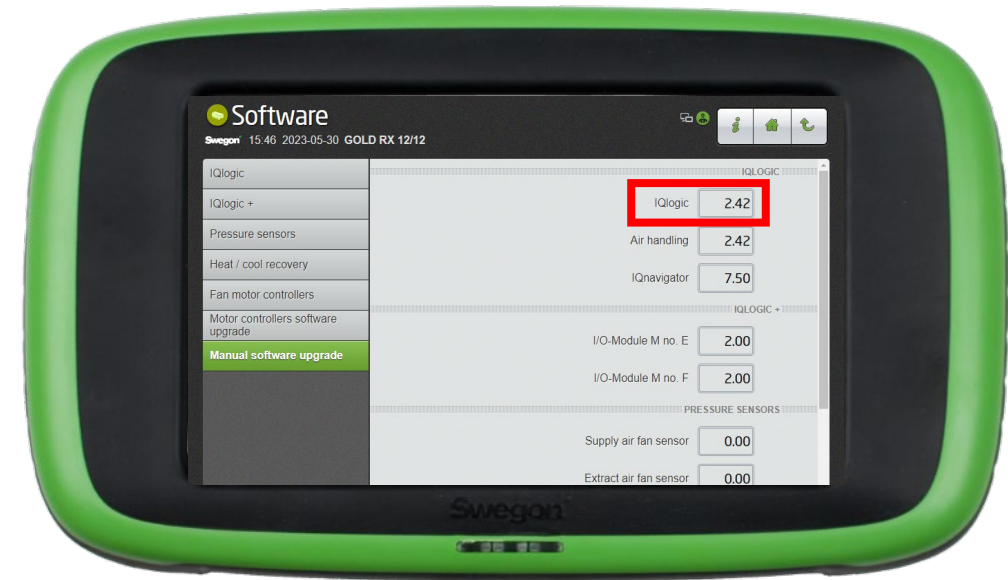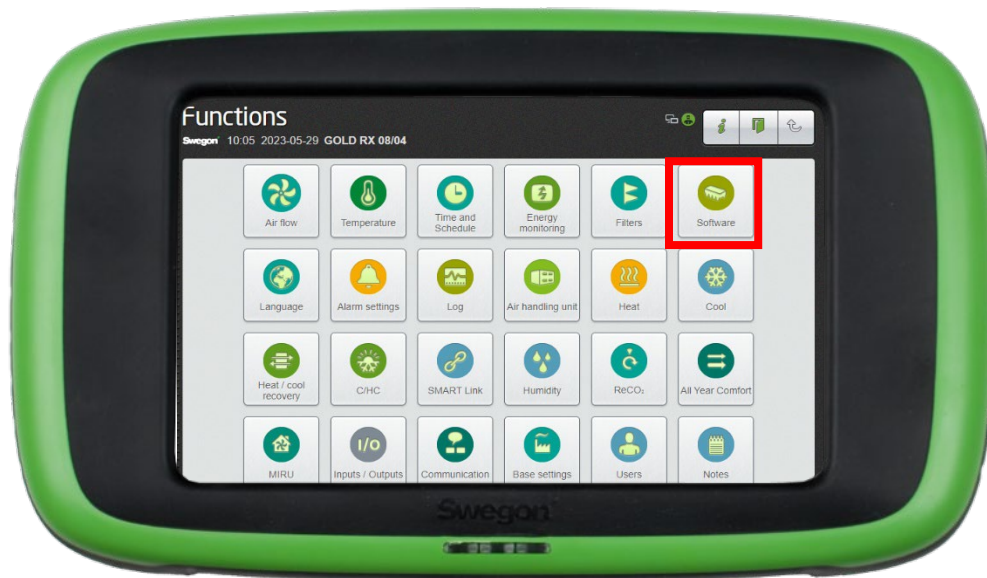

Aktivera Swegon INSIDE på HMI/Web


Retrofit




Gå till "Kommunikation"

Kontrollera att följande fält är korrekt ifyllda:

- IP-adress, nätmask, standardgateway, primär DNS
- Produktens serienummer

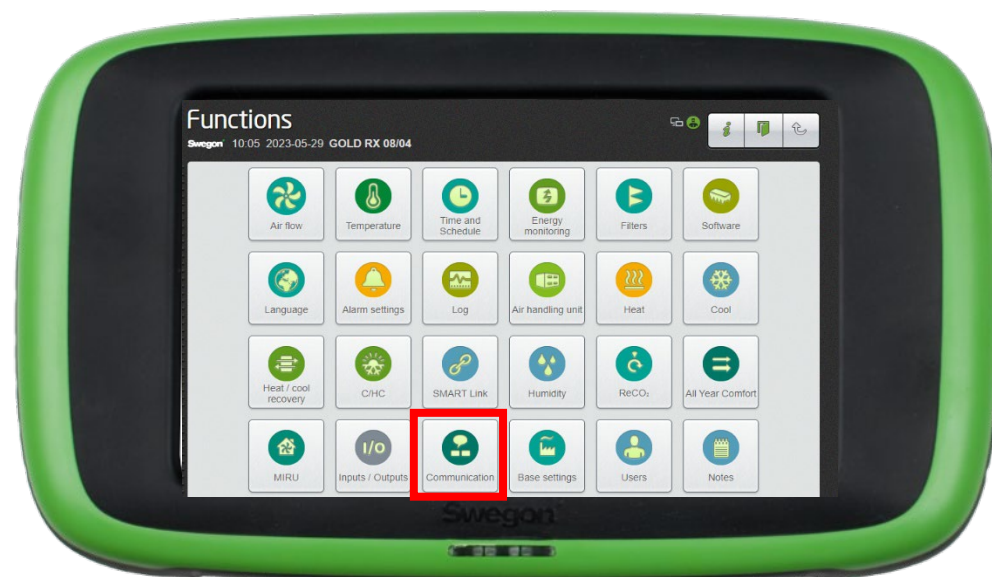

1. Gå till din byggnad och klicka på den produkt du vill göra INSIDE Ready.

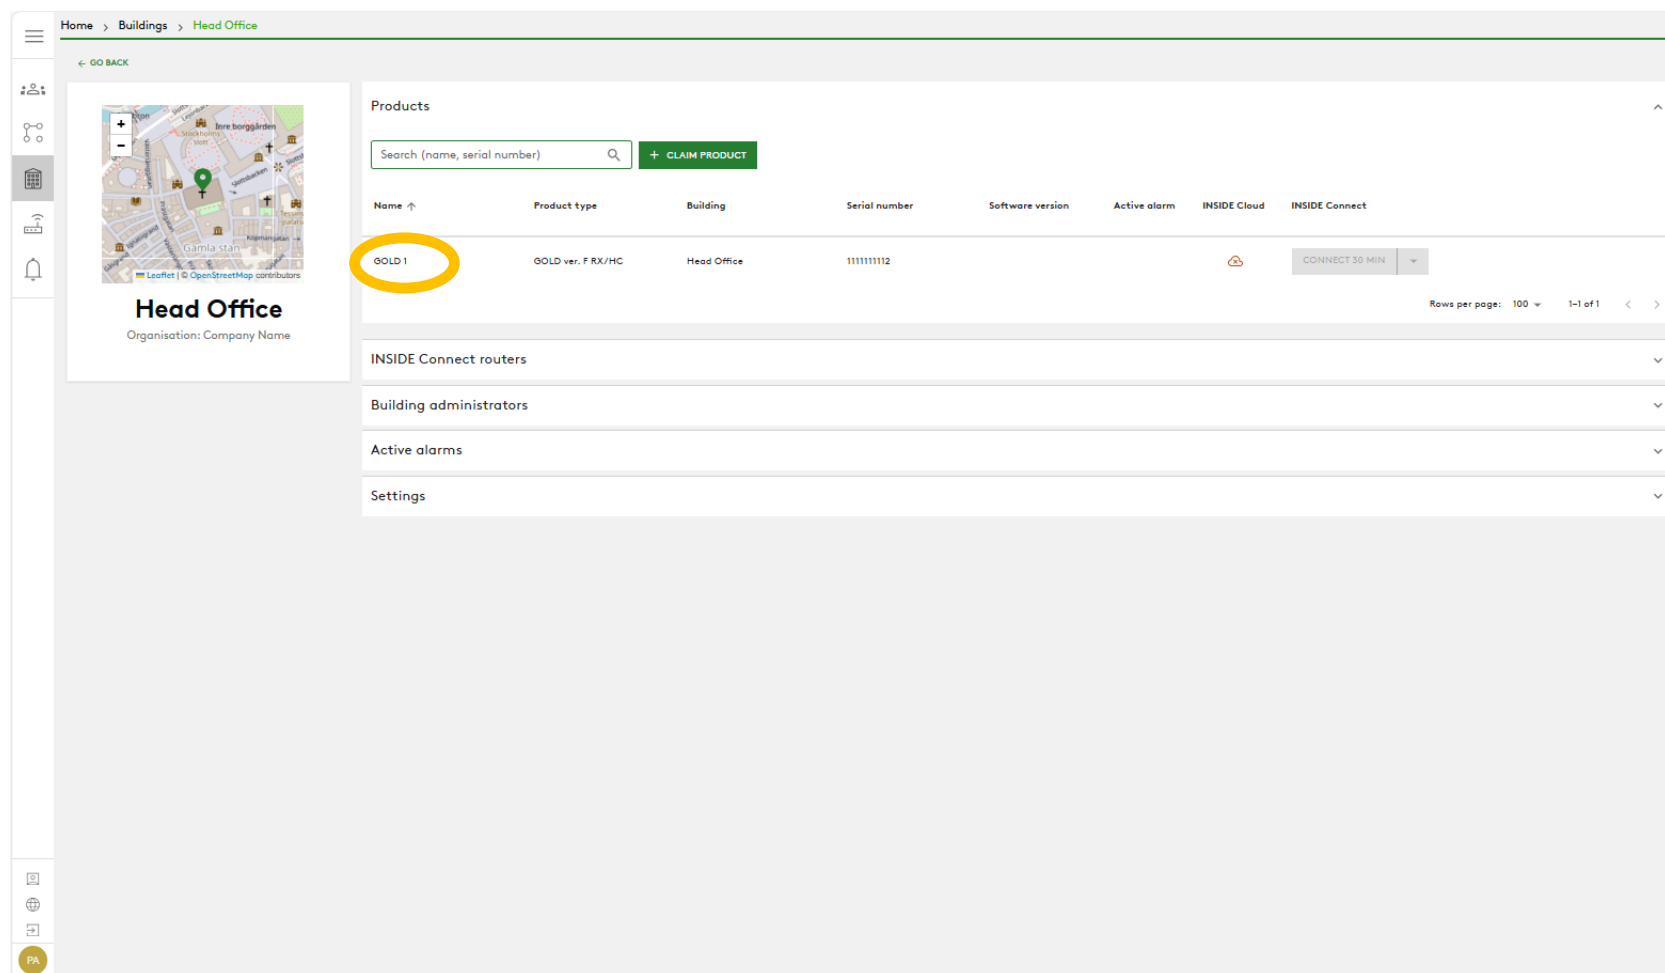

Home > Buildings > Head Office

← GO BACK

Head Office
Organisation: Company Name

Products


Search (name, serial number) [+ CLAIM PRODUCT](#)

Name ↑	Product type	Building	Serial number	Software version	Active alarm	INSIDE Cloud	INSIDE Connect
OOLD 1	OOLD ver. F.RX/HC	Head Office	111111112				CONNECT 30 MIN


Rows per page: 100 1-1 of 1

- INSIDE Connect routers
- Building administrators
- Active alarms
- Settings

2. Tryck på knappen "MAKE INSIDE READY".

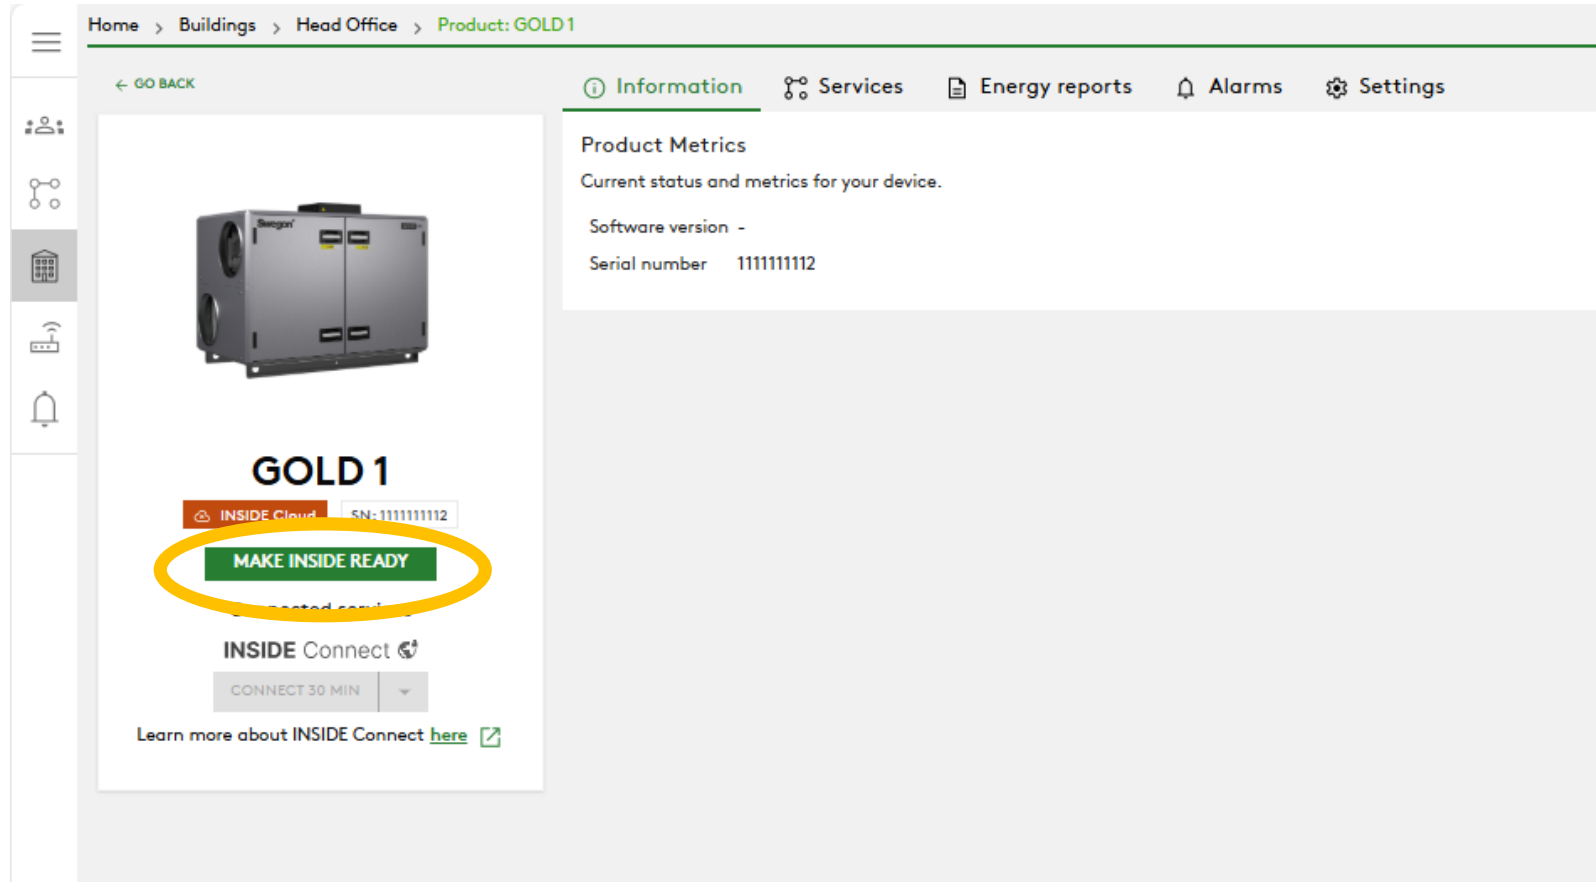


3. Kopiera ID- och aktiveringskoden och klistra in den i rätt textfält i produktens HMI och tryck på "Aktivera". Se till så att även knappen 'Swegon INSIDE' är påslagen. Nu har du anslutit din produkt!

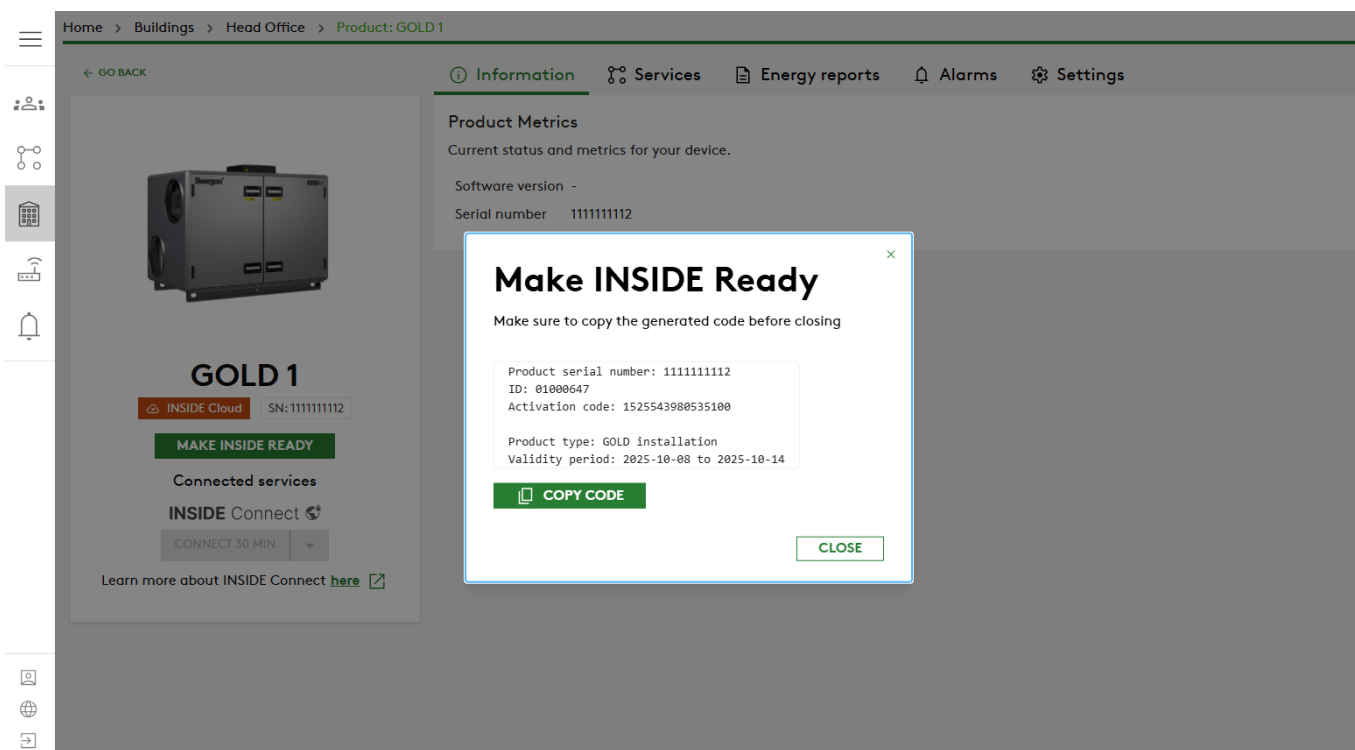

För GOLD-enheter hittar du textfälten under "Kommunikation".

4. När produkterna är anslutna och delar data med INSIDE Cloud visas den gröna molnsymbolen.

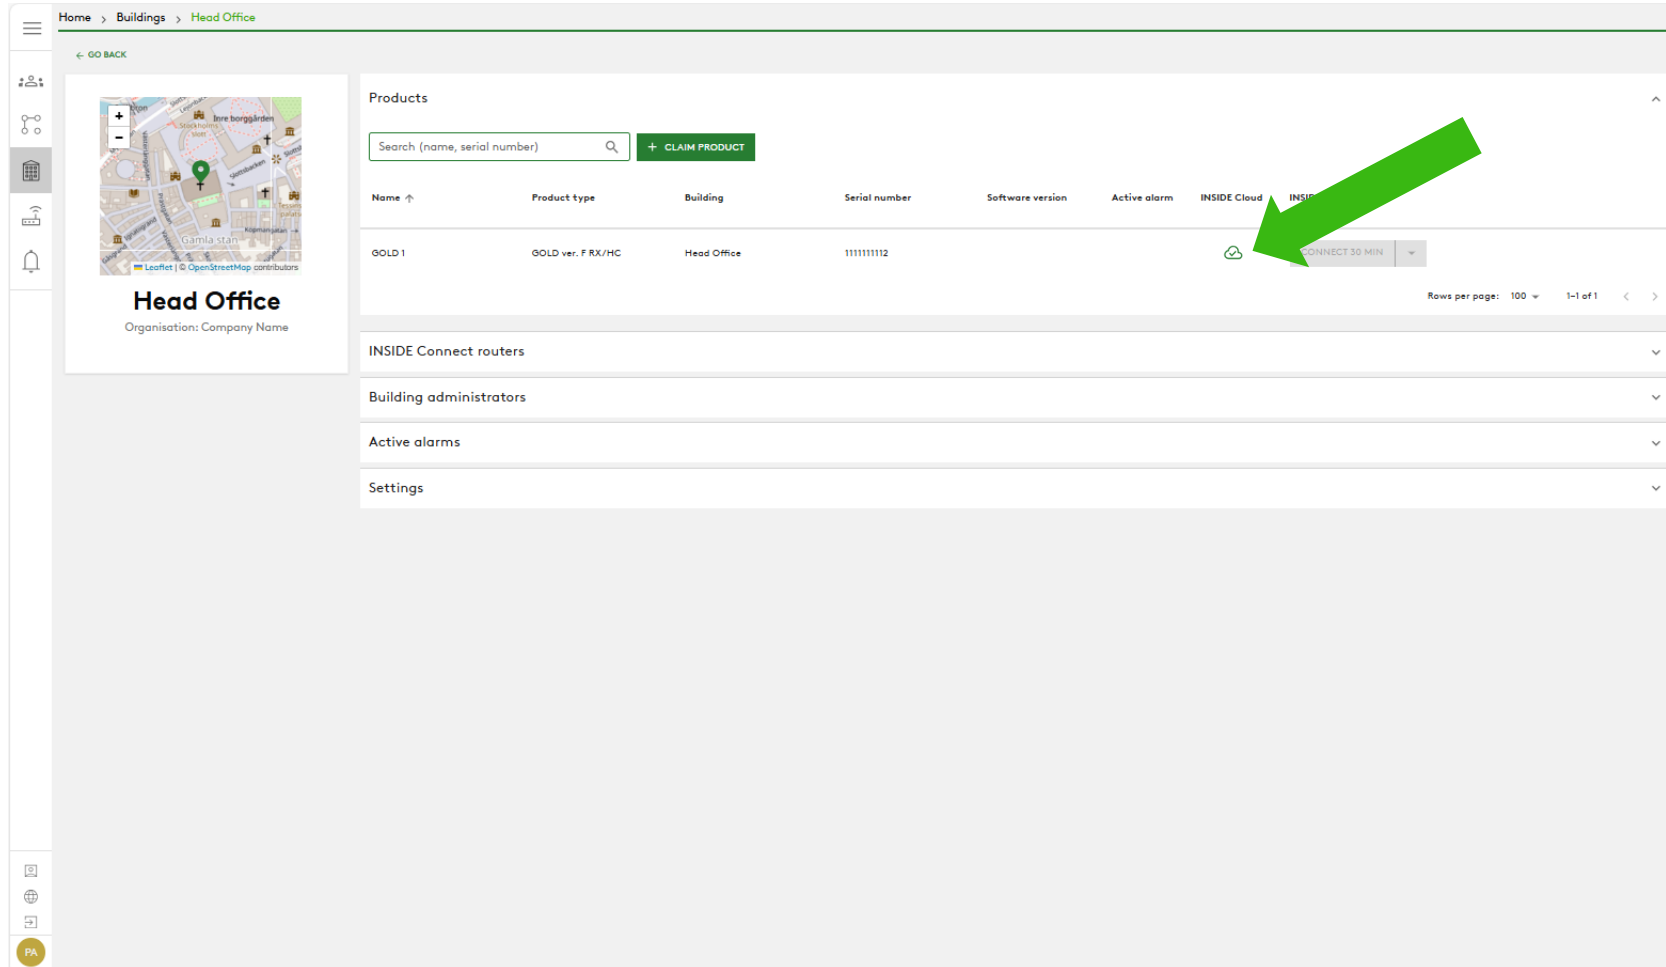

The screenshot shows the Swegon web interface. On the left, there is a sidebar with a map of 'Head Office' and a list of products. The main area displays a table of products. A green arrow points to a green cloud icon in the 'INSIDE Cloud' column, indicating that the product is connected to the cloud.

Products Table:

Name	Product type	Building	Serial number	Software version	Active alarm	INSIDE Cloud	INSIDE Connect
OOLD 1	OOLD ver. F.RX/HC	Head Office	111111112				CONNECT 30 MIN

Head Office
Organisation: Company Name

INSIDE Connect routers

Building administrators

Active alarms

Settings



INSIDE Portal

INSIDE Portal är plattformen för alla anslutna Swegon-produkter och navet för Swegons digitala tjänster


INSIDE Portal

– Navet för alla anslutna Swegon-produkter.

INSIDE Portal ger dig möjlighet att:

- Övervaka viktiga parametrar
 - Status för luftflöde, tryckfall, temperaturer etc.
 - Aktiva larm
- Skapa och exportera energirapporter
- Få övergripande insikter om AHU-aggregatets prestanda
- Enkelt aktivera ytterligare tjänster som kan öka effektiviteten i ditt system
- Bjud in portalanvändare att dela insikter och delegera åtkomstnivå

INSIDE Portal är kostnadsfri

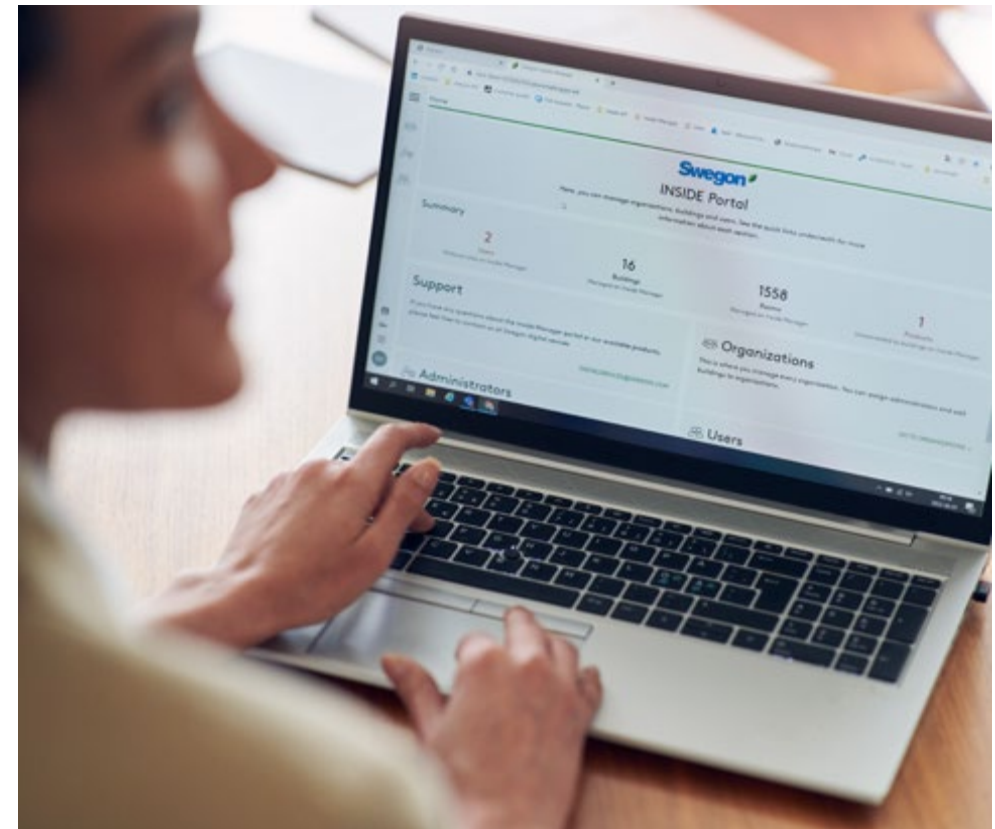

INSIDE Portal – Larmnotiser via email

Få larmmeddelanden till din e-post från anslutna enheter

Home > Alarm subscriptions

My alarm subscriptions

DELETE SELECTED

EDIT SELECTED


+ ADD ALARM SUBSCRIPTION

☐	Product name	Notify at (severity)	Building name	City	Country	Product type	Organisation
☐	Kv Målet 1, Umeå	A B	Swegon Umeå	Umeå	Sweden	SuperWISE	Swegon
☐	Åbyhøj GOLD	A B	Swegon Åbyhøj	Åbyhøj	Denmark	GOLD	Swegon Denmark
☐	Zeta Sky Hi R7 (R32)	A	Swegon Cantarana	Cantarana	Italy	BlueBox Chiller/Heatpump	Swegon
☐	Titan Sky Hi R0 HP	A	Swegon Cantarana	Cantarana	Italy	BlueBox Chiller/Heatpump	Swegon
☐	GEYSER Sky R0 (R290)	A	Swegon Cantarana	Cantarana	Italy	BlueBox Chiller/Heatpump	Swegon
☐	Epsilon Sky Hi	A	Swegon Cantarana	Cantarana	Italy	BlueBox Epsilon SKY	Swegon
☐	Boställsvägen 1 Örebro	A B I	Swegon Örebro	Örebro	Sweden	SuperWISE	Swegon
☐	SWEGON BUREAU	A B I	Swegon France Lyon	Lyon	France	SuperWISE	Swegon
☐	Zeta Rev	A	Swegon Cantarana	Cantarana	Italy	BlueBox Chiller/Heatpump	Swegon
☐	TA/FA 73	A B I	Swegon Kvånum	Kvånum	Sweden	GOLD	Swegon
☐	OPEN SPACE	A	Swegon Cantarana	Cantarana	Italy	GOLD	Swegon

PA

INSIDE Portal - Larmnotiser via email

Välj vilka larm du vill bli informerad om via e-post

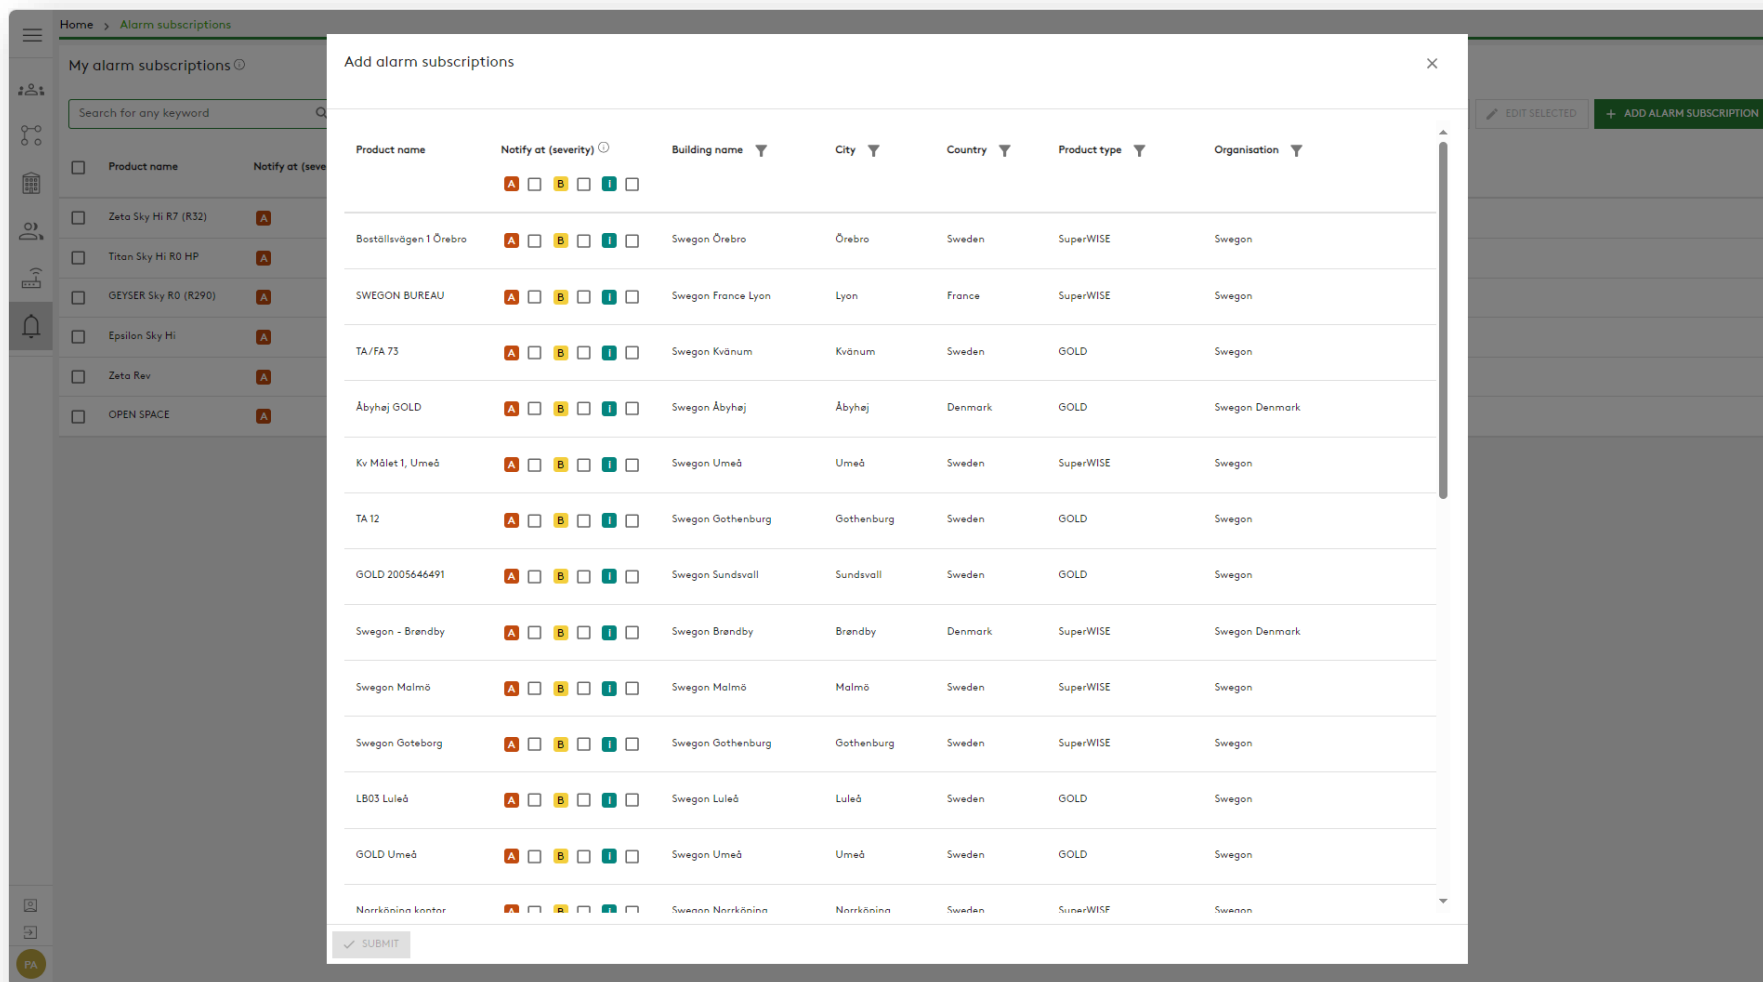

Add alarm subscriptions

Product name	Notify at (severity)	Building name	City	Country	Product type	Organisation
	☐ A ☐ B ☐ I					
Boställsvägen 1 Örebro	☐ A ☐ B ☐ I	Swegon Örebro	Örebro	Sweden	SuperWISE	Swegon
SWEGON BUREAU	☐ A ☐ B ☐ I	Swegon France Lyon	Lyon	France	SuperWISE	Swegon
TA/FA 73	☐ A ☐ B ☐ I	Swegon Kvänum	Kvänum	Sweden	GOLD	Swegon
Äbyhøj GOLD	☐ A ☐ B ☐ I	Swegon Äbyhøj	Äbyhøj	Denmark	GOLD	Swegon Denmark
Kv Målet 1, Umeå	☐ A ☐ B ☐ I	Swegon Umeå	Umeå	Sweden	SuperWISE	Swegon
TA 12	☐ A ☐ B ☐ I	Swegon Gothenburg	Gothenburg	Sweden	GOLD	Swegon
GOLD 2005646491	☐ A ☐ B ☐ I	Swegon Sundsvall	Sundsvall	Sweden	GOLD	Swegon
Swegon - Brøndby	☐ A ☐ B ☐ I	Swegon Brøndby	Brøndby	Denmark	SuperWISE	Swegon Denmark
Swegon Malmö	☐ A ☐ B ☐ I	Swegon Malmö	Malmö	Sweden	SuperWISE	Swegon
Swegon Göteborg	☐ A ☐ B ☐ I	Swegon Gothenburg	Gothenburg	Sweden	SuperWISE	Swegon
LB03 Luleå	☐ A ☐ B ☐ I	Swegon Luleå	Luleå	Sweden	GOLD	Swegon
GOLD Umeå	☐ A ☐ B ☐ I	Swegon Umeå	Umeå	Sweden	GOLD	Swegon
Norrköping kontor	☐ A ☐ B ☐ I	Swegon Norrköping	Norrköping	Sweden	SuperWISE	Swegon

✓ SUBMIT

INSIDE Portal: Översikt över anslutna enheter

Home > buildings

Buildings

Search for building name

Name ↑	City	Country	Number of products	Organization
Swegon Borås	Borås	Sweden	1	Swegon
Swegon Cantarana	Cantarana	Italy	3	Swegon
Swegon France Lyon	Lyon	France	1	Swegon
Swegon Gembloux	Gembloux	Belgium	1	Swegon
Swegon Gothenburg	Gothenburg	Sweden	1	Swegon
Swegon Kvänum	Kvänum	Sweden	3	Swegon
Swegon Kvänum Testcenter	Kvänum	Sweden	2	Swegon
Swegon Luleå	Luleå	Sweden	1	Swegon
Swegon Malmö	Malmö	Sweden	1	Swegon
Swegon Norrköping	Norrköping	Sweden	1	Swegon
Swegon Örebro	Örebro	Sweden	1	Swegon
Swegon Stockholm	Stockholm	Sweden	1	Swegon
Swegon Tomelilla	Tomelilla	Sweden	1	Swegon
Swegon Umeå	Umeå	Sweden	1	Swegon

Fullständig översikt över alla byggnader i din organisation

- Byggnadsnamn
- Byggnadens plats
- Antal produkter

Rows per page: 100 ▾ 1-14 of 14 < >

Home > buildings > Swegon Kvänum

← GO BACK

Swegon Kvänum

Kvänum, Sweden

Latitude: 58.2980300699508

Longitude: 13.189557

Fullständig översikt över Swegons produkter i varje byggnad

- Plats
- Mjukvaruversion
- Aktiva larm
- Status för anslutning

Products

Search (name, serial number)

Q

Name	Product type	Building	Serial number	Software version	Active alarm	Connected
Kvänum Tellus, Casa	GOLD	Swegon Kvänum	G00403364	2.42		
Swegon Kvänum	WISE	Swegon Kvänum	6V5M1U5CIUTPHT38WDXD	1.160.1		
TA/FA 37	GOLD	Swegon Kvänum	G320716	2.42		

Rows per page: 10 1-3 of 3 < >

Rooms

Building administrators

FR

INSIDE Portal: Övervaka prestanda

[← GO BACK](#)[EDIT NAME](#)

GOLD RXHC 12

Connected ●
Software version: 2.42
Serial number: 2006392391

Information

AHU status	
AHU status	Damper switch off delay
Supply air	
Supply air	15.9 °C
Supply air flow	803.0 l/s
Supply air fan power consumption	0.6 kW
Supply air duct pressure	112.5 Pa
Supply filter	
Supply air internal filter	106.7 Pa
Supply air internal filter alarm	0.0 Pa
Extract air	
Extract air	23.0 °C
Extract air flow	800.0 l/s
Extract air duct pressure	109.3 Pa
Extract air fan power consumption	0.5 kW
Extract filter	
Extract air internal filter	66.5 Pa

Övervaka:

- Driftstatus
- Nyckelparametrar
- Energidata
- Larm

Live: alltid senaste värdet

Temperature
☒ °C
☐ °F

Pressure
☒ Pa
☐ psi
☐ in.wc

Airflow
☒ l/s
☐ cfm
☐ m³/s
☐ m³/h

INSIDE Portal: Övervaka prestanda

Energy

Cool power recovery	0.0 kW
Specific fan power	1.4 kW/m ³ /s
Temperature efficiency	0.0 %
Heat power recovery	0.0 kW
Temperature efficiency	0.0 %
Heat exchange motor energy consumption since unit installation	0.2 MWh
Heat energy consumption since unit installation	12.0 MWh
Total Heat Cool energy consumption since unit installation	16.1 MWh
Total energy recovery since unit installation	59.6 MWh
Total air fan energy consumption since unit installation	8.4 MWh
Supply air fan energy consumption	1.3 MWh
Heat energy recovery since unit installation	59.2 MWh
Supply air fan energy consumption since unit installation	4.2 MWh
Extract air fan energy consumption	1.2 MWh
Total AHU energy consumption since unit installation	8.6 MWh
Heat exchange motor power consumption	0.0 kW
Extract air fan energy consumption since unit installation	4.2 MWh
Cool energy recovery since unit installation	0.5 MWh
Total AHU energy consumption	2.6 MWh
Heat exchange motor energy consumption	0.0 MWh
Cool energy consumption since unit installation	4.1 MWh

Alarms

Alarm priority A triggered	0
Alarm priority B triggered	0

Detaljerad information om aktiva larm

Alarms

Name	Raised at
Info 98:7 Extract air air handling unit filter calibration not performed	2023-07-19 07:24
Info 98:5 Supply air air handling unit filter calibration not performed	2023-07-19 07:24

INSIDE Portal: Energirapporter

FR

Home > buildings > Swegon Kvänum > Product: Kvänum Tellus, Casa

Connected
Software version: 2.42
Serial number: G00403364

Information

Reports

1 row selected

Rows per page: 10 1-7 of 7

Uploads

CREATE REPORT

DOWNLOAD REPORT

DELETE REPORT(S)



☒	Created	Status	From	To
☒	2023-05-29 08:10	Completed	2023-05-01	2023-05-29
☐	2023-05-10 07:54	Completed	2023-04-01	2023-05-02
☐	2023-04-13 08:04	Completed	2023-03-17	2023-04-13
☐	2023-04-11 13:48	Completed	2023-04-03	2023-04-10
☐	2023-04-07 17:56	Completed	2023-03-16	2023-04-07
☐	2023-03-27 10:17	Completed	2023-03-20	2023-03-27
☐	2023-03-14 10:03	Completed	2023-03-06	2023-03-13

Snabbt och enkelt att generera energirapporter

Energy report


Analysera prestandan

Generera energirapporter med önskat tidsintervall och detaljnivå.

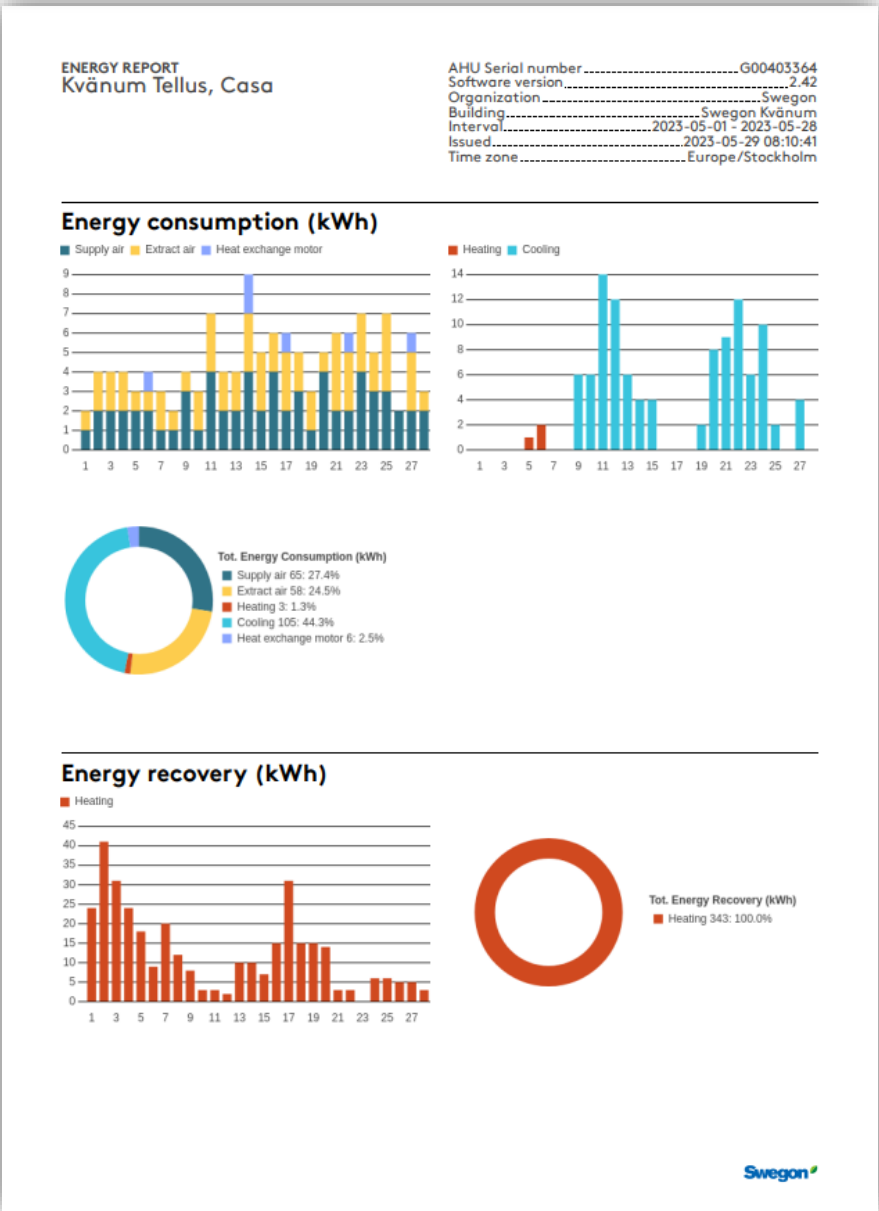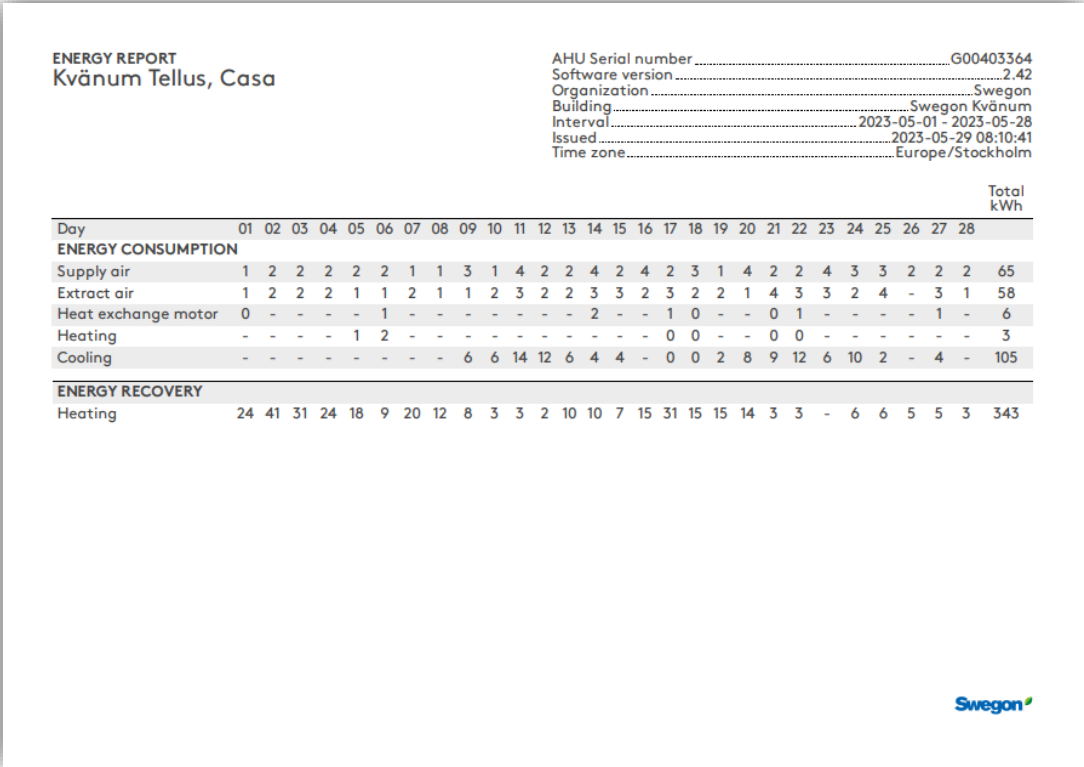

INSIDE Portal: Logga in

Länk till INSIDE Portal: <https://inside.swegon.com/>

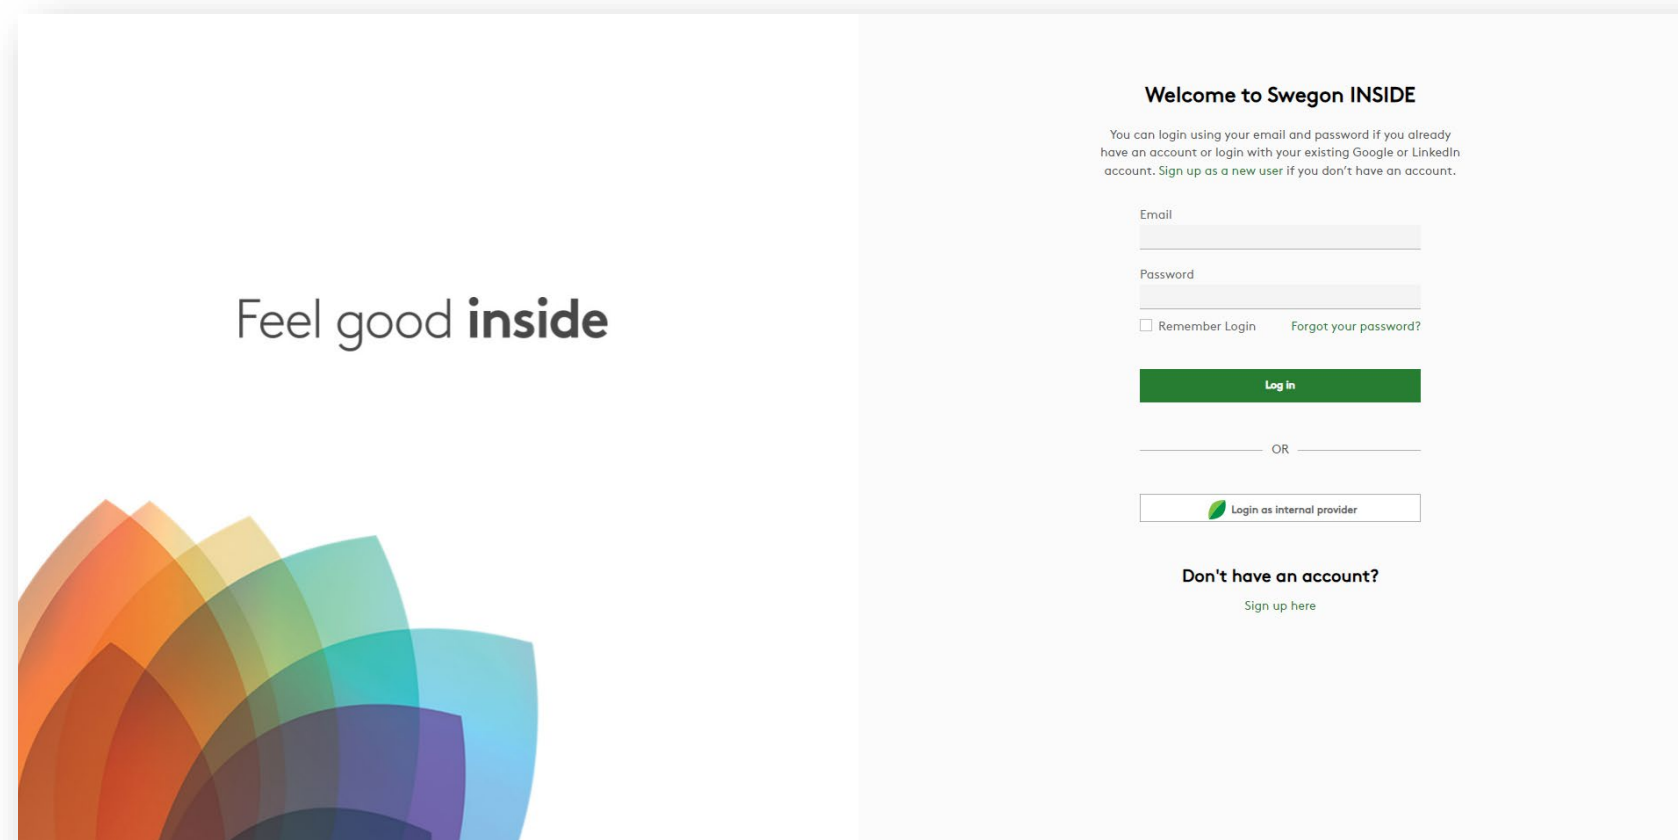

The image shows a screenshot of the Swegon INSIDE Portal login page. The page is split into two main sections. The left section has a white background with the text "Feel good **inside**" in a dark grey font. Below the text is a decorative graphic consisting of several overlapping, semi-circular shapes in various colors including orange, yellow, green, blue, and purple. The right section has a light grey background and contains the login form. At the top of this section is the heading "Welcome to Swegon INSIDE". Below the heading is a paragraph of text: "You can login using your email and password if you already have an account or login with your existing Google or LinkedIn account. Sign up as a new user if you don't have an account." Below this text are two input fields: "Email" and "Password". Below the "Password" field are two links: "Remember Login" (with a checkbox) and "Forgot your password?". Below these links is a green "Log In" button. Below the button is a horizontal line with the text "OR" in the center. Below the line is a button with a green leaf icon and the text "Login as internal provider". At the bottom of the right section is the heading "Don't have an account?" followed by a link "Sign up here".

Feel good **inside**

Welcome to Swegon INSIDE

You can login using your email and password if you already have an account or login with your existing Google or LinkedIn account. Sign up as a new user if you don't have an account.

Email

Password

☐ Remember Login [Forgot your password?](#)

Log In


OR

 Login as internal provider


Don't have an account?

[Sign up here](#)

Flera sätt att övervaka GOLD

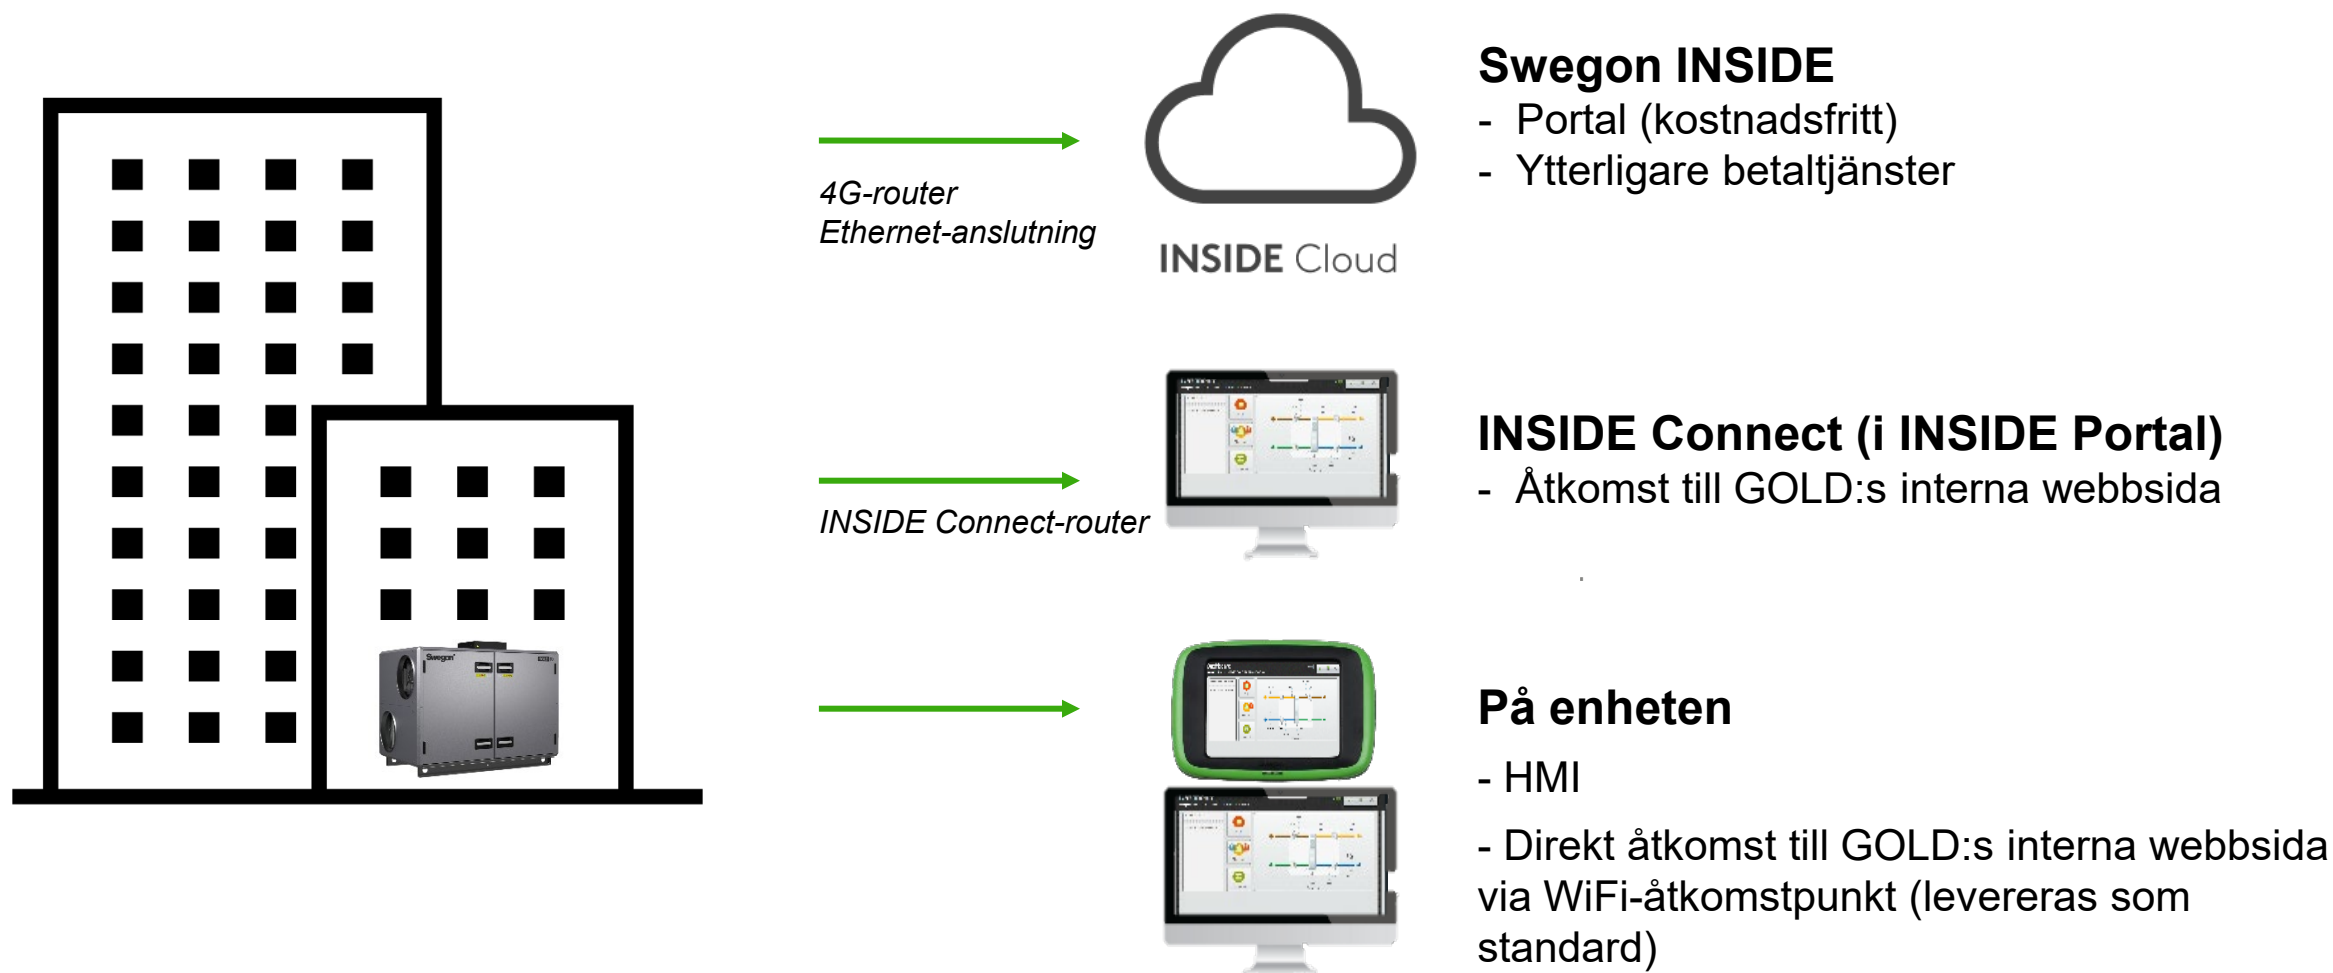

Digitala tjänster

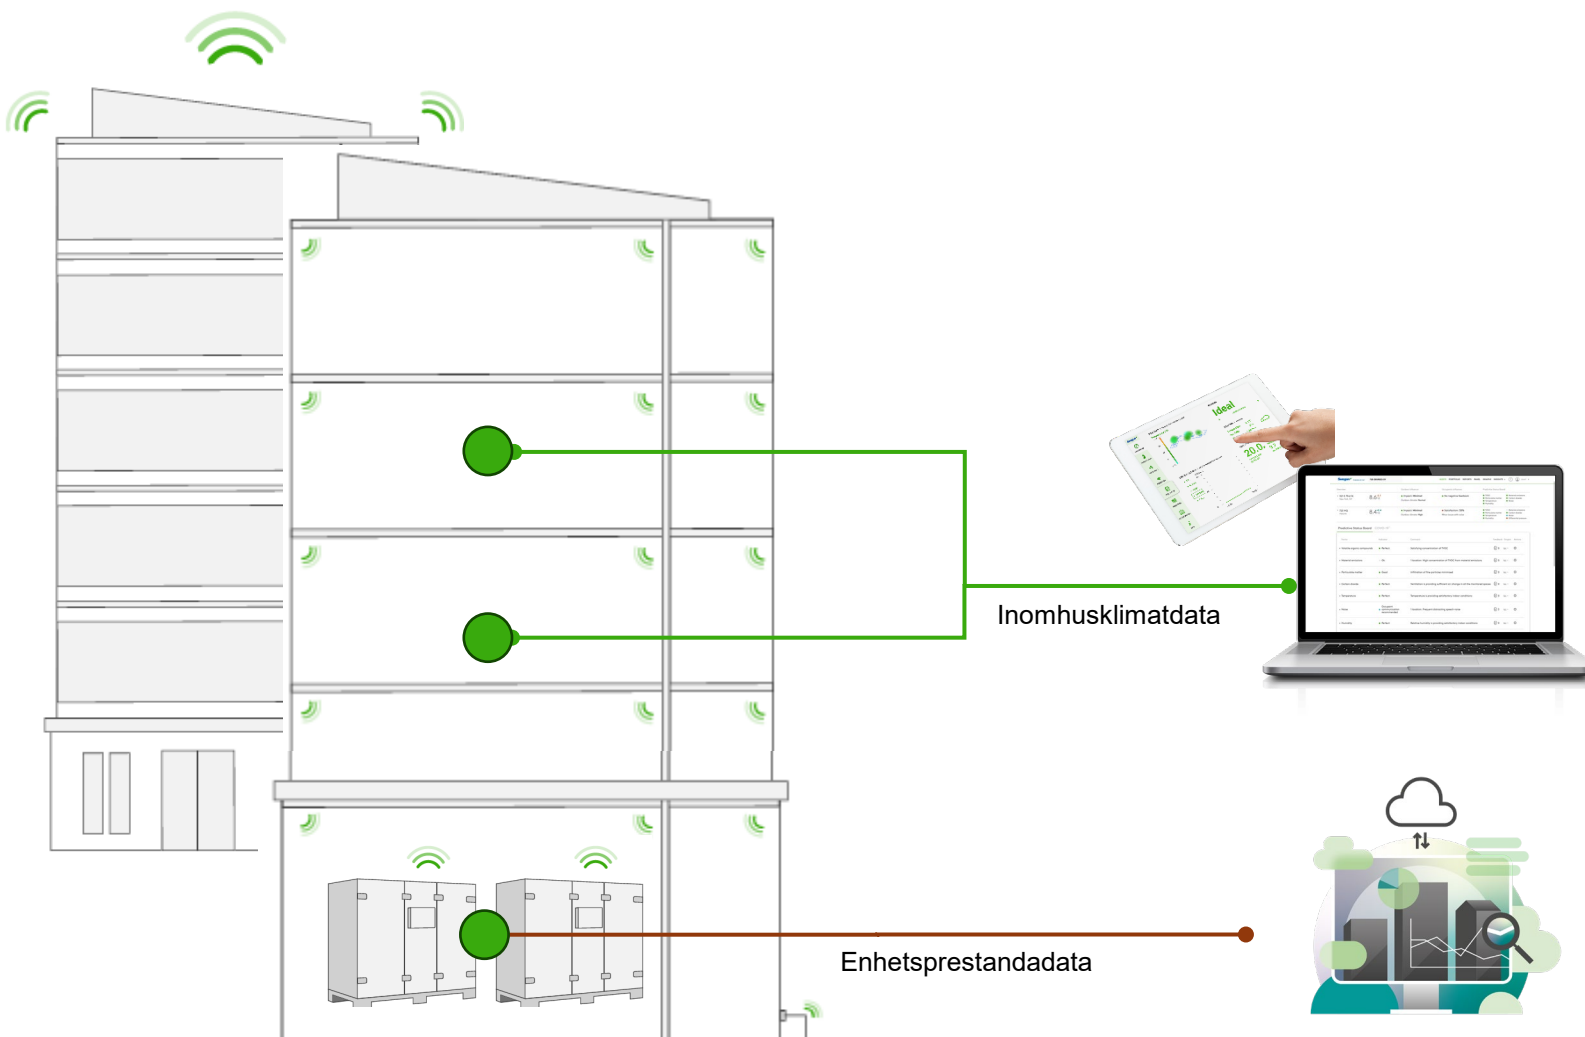

INSIDE Analytics & Visualiser
Analys och visualisering av inomhusklimatet.

INSIDE Portal / INSIDE Manager
Fjärrövervakning av AHU:s nyckelparametrar, aktiva larm och energiförbrukning.

Swegon 



Feel good **inside**

