



## EC DECLARATION OF PERFORMANCE

RAM-F-024 B

Fire Shield DWFX-F fire damper

Fire Shield DWFX-C fire damper

Fire Shield I/F fire damper

Complying with the following EU Regulation:  
305/2011/EEC : Construction Products Regulation

Swegon Air Management LTD  
Actionair, South Street, Whitstable, Kent CT5 3DU

System 1

BRE Global Limited - NB0832

Performed the determination of the product type on the basis of type testing (including sampling), and the initial inspection of the manufacturing plant and of factory production control and continuous surveillance, assessment and evaluation of factory control under system 1 and issued the certificate of constancy of conformity of the factory production control (0832-CPR-P0001)

Declared performance according to:  
BS EN 15650 'Ventilation for buildings: Fire Dampers'

**REQUIRED PERFORMANCES ACCORDING TO BS EN 15650:2010**

Fire resistance according to EN 1366-2 and classifications according to EN 13501-3:

RANGE	TYPE	WALL / FLOOR	CLASSIFICATION
100-1250mm X 100-1000mm	Fire Shield I/F (AAF10701 or AAF8018)	Floor	E120(ho i↔o) - (300Pa)
100-1250mm X 100-1000mm	Fire Shield I/F (AAF10703 Sheets 1 & 2)	Rigid Wall	E120(ve i↔o) - (300Pa)
100-1250mm X 100-1000mm	Fire Shield DWFX-F (AAF10705, AAF10707 AAF10711, AAF10713, AAF11949)	Flexible & rigid Wall	E120(ve i↔o) - (300Pa)
100-1250mm X 100-1000mm	Fire Shield DWFX-C (AAF10709 AAF11682 AAF11944)	Flexible Wall	E120(ve i↔o) - (300Pa)


Nominal activation conditions/sensitivity according to ISO 10294-4 - Sensing element - Response behaviour - Sensing element - Faulty set-off	Pass
Response delay (response time) according to EN 1366-2: - closure time	Pass
Operational reliability according to EN 1366-2: - cycling	Pass
Durability of response delay according to EN 1366-2: - sensing element response temperature and load bearing capacity	Pass
Durability of operational reliability according to 1366-2: - open and closing cycle	50 cycles - passed

**OPTIONAL PERFORMANCES ACCORDING TO EN 15650 AND NATIONAL REQUIREMENTS**

Protection against corrosion according to EN 60068-2-52:	Pass
Damper casing leakage according to EN 1751:	Class C

Signed for and on behalf of the manufacturer by:

Kevin Munson  
 Managing Director  
 South street,  
 Whitstable,  
 Kent,  
 England

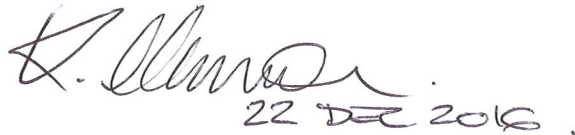

22 DEC 2016

